
MILITARY SPECIFICATION SHEET

TOOLS, FIBER OPTIC, SCRIBE,
CARBIDE, TYPE I

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring fiber optic tools described herein shall consist of this specification and the latest issue of MIL-T-83523.

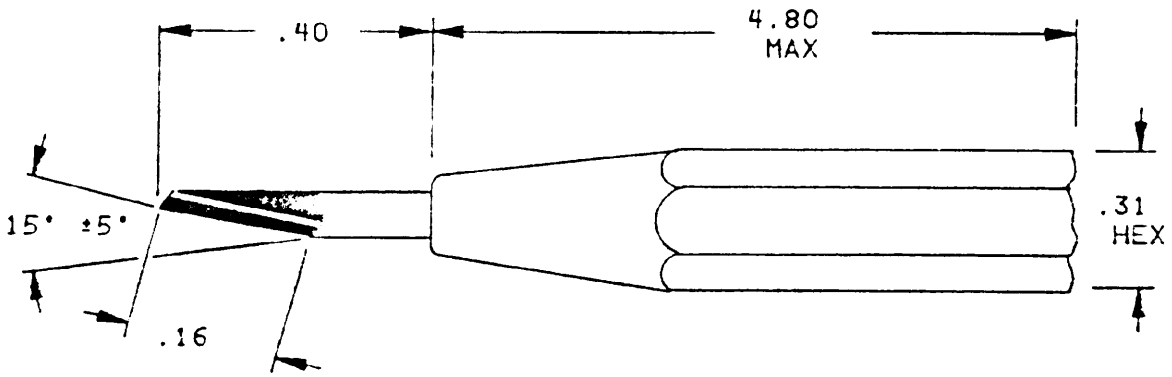




| Inches | mm |
|---|---|
| .16 | 4.1 |
| .31 | 7.9 |
| .40 | 10.2 |
| 4.80 | 121.9 |

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.005 (0.13 mm) for three place decimals and ±.01 (0.3 mm) for two place decimals. Angles ±1°.

FIGURE 1. Fiber optic carbide scribe tool (P/N M83523/3-01)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:36Z
Check the source to verify that this is the current version before use.

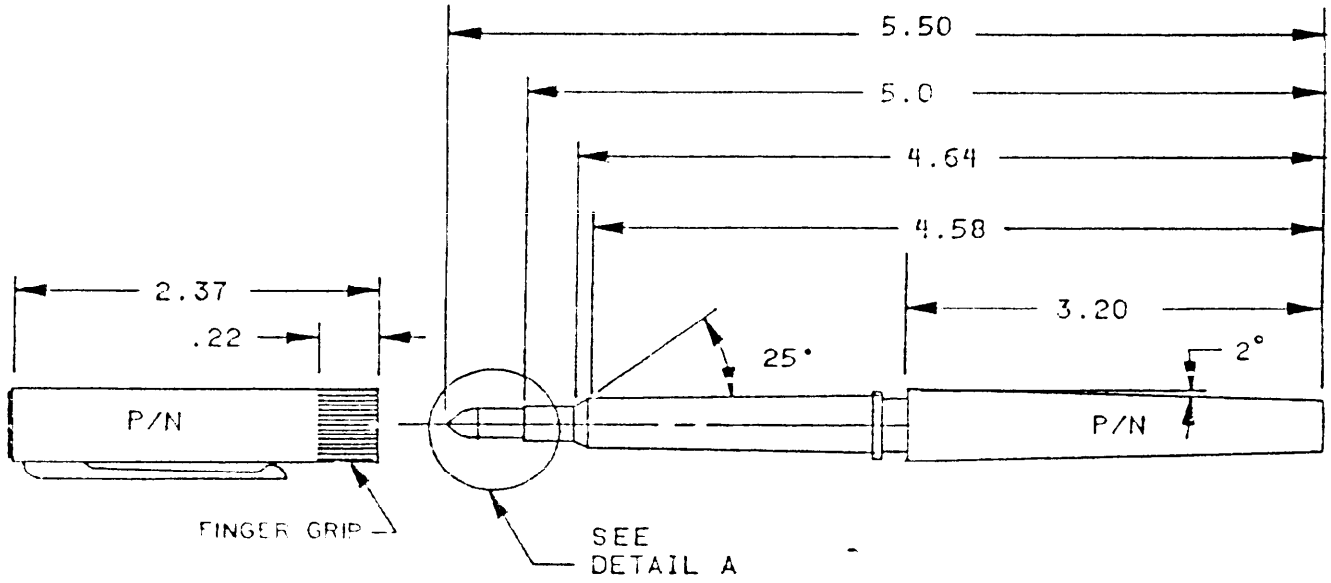

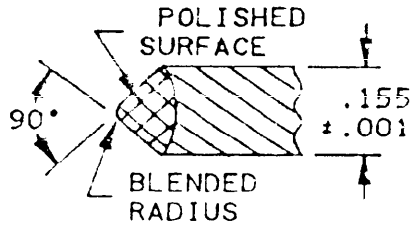
MATERIAL: MICRO-GRAIN CARBIDE

DETAIL A

| Inches | mm |
|---|---|
| .001 | 0.03 |
| .155 | 3.94 |
| .220 | 5.59 |
| 2.37 | 60.3 |
| 3.20 | 81.28 |
| 4.58 | 116.33 |
| 4.64 | 117.86 |
| 5.0 | 127.0 |
| 5.50 | 139.7 |

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.005 (0.13 mm) for three place decimals and ±.01 (0.3 mm) for two place decimals. Angles ±1°.

FIGURE 2. Fiber optic carbide scribe (P/N M83523/3-02).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:36Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See figures 1 and 2.

Weight: 4 ounces maximum.

Material:

Part number M83523/3-01: Scribe tool tip shall be made from a solid carbide blank with three angles ground to 8 microinches RMS minimum and polished to 4 microinches RMS minimum. The handle shall have grooved finger grips and be made of anodized aluminum in accordance with MIL-A-8625.

Part number M83523/3-02: Scribe tool tip shall be made from a solid micro-grain carbide blank with a chip free cutting edge as verified at 60X magnification. The holder shall be made of molded plastic with a removable cap used for protection when the tool is not in use. Cap shall be snap-on.

Part number: See table I.

Application: These tools shall be used to scribe optical fibers as specified in DOD-F-49291.

TABLE I. Part numbers.

| Type | Tool |
|---|---|
| Carbide scribe tool | M83523/3-01 |
| Carbide scribe | M83523/3-02 |

Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - AR, AT, GL, MI
Navy - AS, OS, SH
Air Force - 11, 12, 13, 14, 70, 71, 80, 82, 84, 90
DLA - ES

User activities:
Army - AV, ME
Navy - MC
Air Force - 19

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 6010-0017)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:36Z
Check the source to verify that this is the current version before use.