MILITARY SPECIFICATION SHEET

INDUCTOR, REACTOR

The complete requirements for procuring the inductor herein shall consist of this document and the issue in effect of MIL-T-83720.

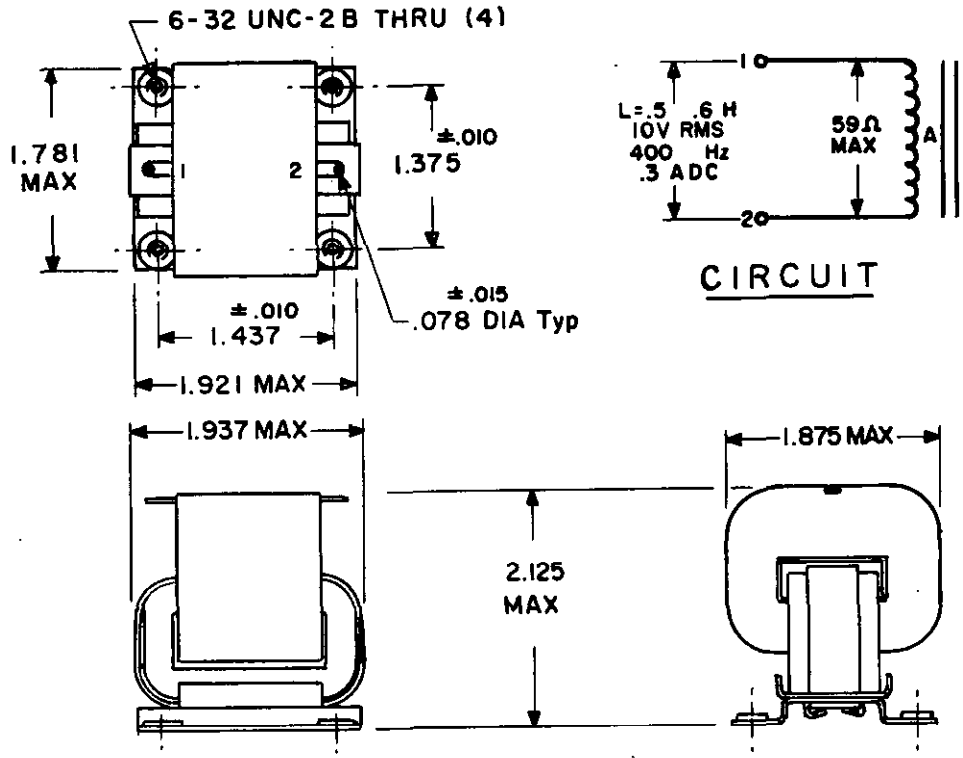

Figure 1

NOTES:

1. Dimensions are in inches
2. Identify terminals

FSC 5950

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:15Z
Check the source to verify that this is the current version before use.

REQUIREMENTS.

Mechanical and Environmental Requirements.

Dimensions and Configuration:	See Figure. 1
Vibration:	Test Condition C, Method 204.
Altitude:	50,000 feet max.
Maximum Operating Temperature:	180°C.
Ambient Temperature Range:	(-54°C to 95°C).
Temperature Rise:	84°C.
Weight:	0.6 pound nominal.
Terminals:	Flat solder type to accommodate 3 leads of #18 AWG standard wire.
Life:	10,000 hours.

Electrical Ratings.

Inductance:	.5 to .6 H.
Frequency:	400 Hz.
Max DC Amps:	0.3
Max DC Resistance:	59r
Working Voltage:	350V
Dielectric Withstanding Voltage:	1,000V
Rating:	$.045LI^2$ max for max temperature rise of 84°C.

Part Number: Consists of the basic number of this specification sheet and a dash number.

Example: Part No. M83720/9-01

Custodian:
Air Force - 85

Preparing Activity:
Air Force - 85

Review Activities:
Air Force - 11, 84

(Project 5950-F089-09)

☆ U. S. GOVERNMENT PRINTING OFFICE: 1968-341-514/A-3357

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:15Z
Check the source to verify that this is the current version before use.