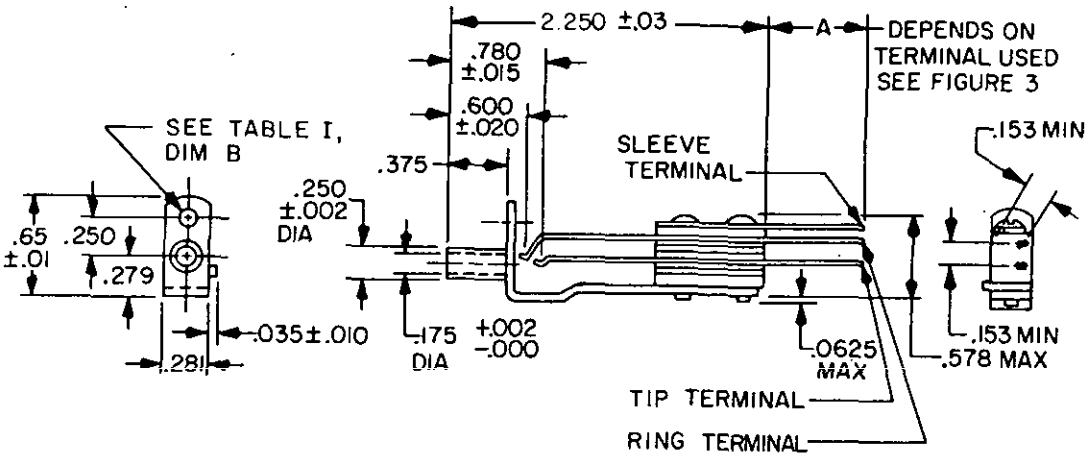

MILITARY SPECIFICATION SHEET

JACKS, (BANTAM) TELEPHONE
3 CONDUCTOR, SINGLE

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the jacks described herein shall consist of this document and the latest issue of Specification MIL-J-641.



CIRCUIT DIAGRAM

-1-2-5 and -6 (no breaks)

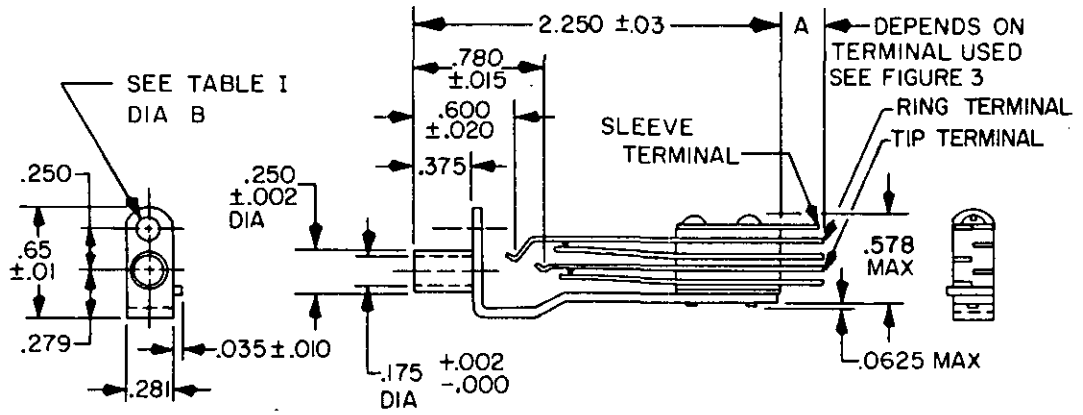
*FIGURE 1. Dimensions and configurations.*


(D) denotes changes



FSC 5935

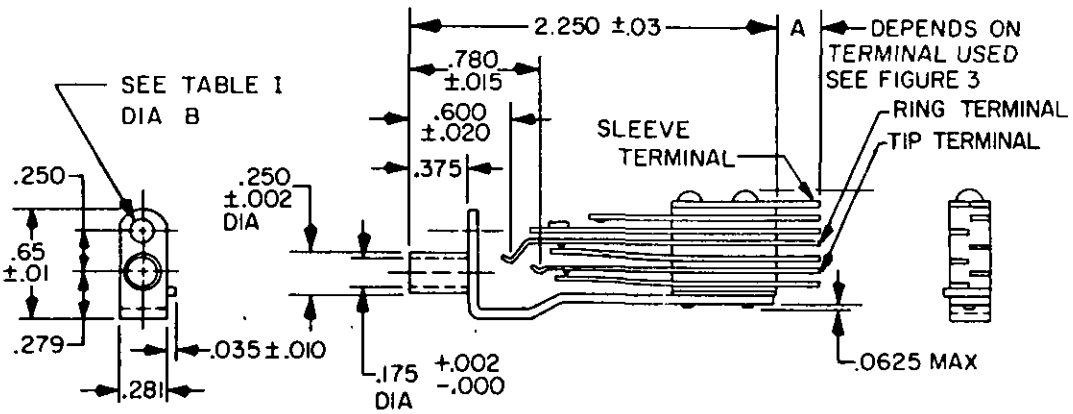
Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:05Z
Check the source to verify that this is the current version before use.




CIRCUIT DIAGRAM

-3 -4 -7 and -8 (breaks)



CIRCUIT DIAGRAM

-9-10-11 and -12 (2 breaks
1 make)

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:05Z
Check the source to verify that this is the current version before use.

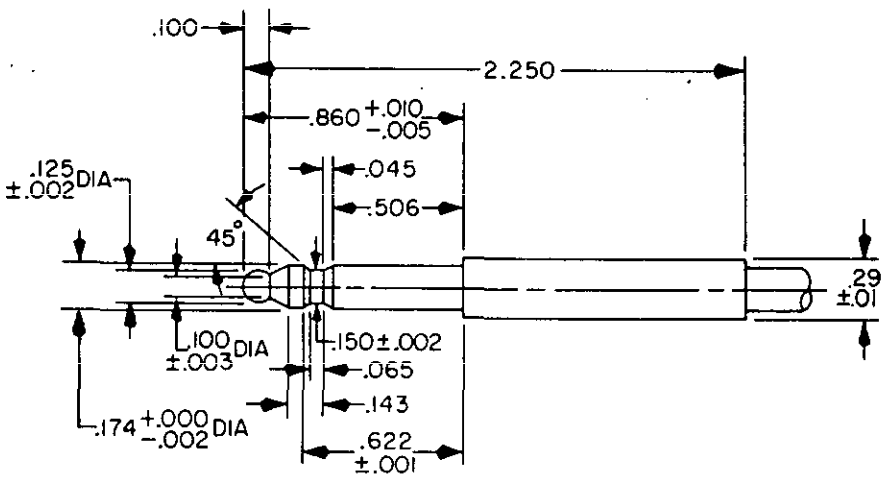
| INCHES | MM | INCHES | MM | INCHES | MM | INCHES | MM |
|---|---|---|---|---|---|---|---|
| .0020 | .051 | .035 | .89 | .250 | 6.35 | .600 | 15.24 |
| .010 | .25 | .0625 | 1.588 | .279 | 7.09 | .65 | 16.5 |
| .015 | .38 | .115 | 2.92 | .281 | 7.14 | .780 | 19.81 |
| .020 | .51 | .153 | 3.89 | .375 | 9.52 | 2.250 | 57.15 |
| .03 | .8 | .175 | 4.44 | .578 | 14.68 | 2.5 | 64. |

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.005 (.13 mm).
4. All dimensions are after plating.

FIGURE 1. Dimensions and configurations - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:05Z
Check the source to verify that this is the current version before use.



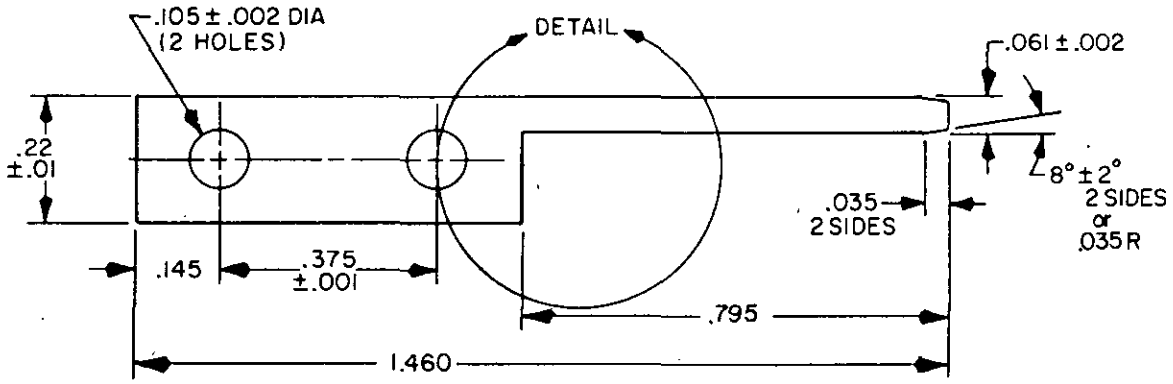

| INCHES | MM | INCHES | MM | INCHES | MM |
|---|---|---|---|---|---|
| .001 | .03 | .065 | 1.65 | .29 | 7.4 |
| .002 | .05 | .100 | 2.54 | .506 | 12.85 |
| .003 | .08 | .125 | 3.18 | .622 | 15.80 |
| .005 | .13 | .143 | 3.63 | .860 | 21.84 |
| .010 | .25 | .150 | 3.81 | 2.250 | 57.15 |
| .045 | 1.14 | .174 | 4.42 | | |

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are ±.005 (.13 mm) and ±1° on angles.
4. Finger shall be hardened to Rockwell C 60-62, polished and then hard-chromium plated to .0003 (.008 mm) maximum thickness.
5. All dimensions are after plating.
6. Concentricity shall be .003 (.08 mm) total indicator reading.


FIGURE 2. Test plug TP-777.



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:05Z
Check the source to verify that this is the current version before use.




WIRE WRAP TERMINAL




INSERT, OPTIONAL
DETAIL

| INCHES | MM | INCHES | MM | INCHES | MM |
|---|---|---|---|---|---|
| .001 | .03 | .061 | 1.55 | .22 | 5.6 |
| .002 | .05 | .091 | 2.31 | .375 | 9.52 |
| .01 | .3 | .100 | 2.54 | .795 | 20.19 |
| .035 | .89 | .145 | 3.68 | 1.460 | 37.08 |

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.005 (.13 mm).
4. Solder lug terminals shall meet the requirements of MIL-J-641, 3.5.5, A dimension shall be .325 (8.26 mm) maximum.
5. All dimensions are after plating.

*FIGURE 3. Terminals.*



Source: https://assist.dla.mil Downloaded: 2026-10-16T11:05Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Terminals: See figure 3 (wire-wrap) or MIL-J-641 (solder lug).

Ⓓ Materials:
Frame: Steel.
Sleeve: Brass.
Springs: Nickel silver.
Contact: Palladium or gold alloy.

Insertion and withdrawal forces: The insertion and withdrawal forces shall be as follows:
Insertion force: 7 pounds (maximum).
Withdrawal force: 1.0 pound (minimum); 7 pounds (maximum).
Test plug: TP-777 (see figure 2).

Spring life: Test plug TP-777 shall be used.

Frame strength: Frame strength test is applicable. Load - 7 pounds maximum.

Terminal of tip contact spring shall be on right side when terminals are viewed from the rear, with the jack in a position such that the contact spring pileup is on top of the jack frame.

Cutout in jack frame shall be positioned so that a minimum of .016-inch clearance exists between the tip of the TP-777 plug and the edge of the frame cutout at all times during insertion of the plug.

Group qualification: See table II.

All terminals shall be stacked as shown in schematic (see figure 1).

Supersession data: See table III.

Mating plugs: See table IV.

Part number: M641/19 - (dash number, see table I).

TABLE I. Dash numbers and characteristics.

| Dash number | Connection | Mounting | Switching action | Terminal | Dimension B |
|---|---|---|---|---|---|
| -1 | Tip, ring, and sleeve | Single lug | None | Wire wrap | .115 diameter |
| -2 | | | None | Solder lug | .115 diameter |
| -3 | | | 2 breaks | Wire wrap | .115 diameter |
| -4 | | | 2 breaks | Solder lug | .115 diameter |
| -5 | | | None | Wire wrap | .099-48UNC-2B |
| -6 | | | None | Solder lug | .099-48UNC-2B |
| -7 | | | 2 breaks | Wire wrap | .099-48UNC-2B |
| -8 | | | 2 breaks | Solder lug | .099-48UNC-2B |
| -9 | | | 2 breaks, 1 make | Wire wrap | .115 diameter |
| -10 | | | 2 breaks, 1 make | Solder lug | .115 diameter |
| -11 | | | 2 breaks, 1 make | Wire wrap | .099-48UNC-2B |
| -12 | | | 2 breaks, 1 make | Solder lug | .099-48UNC-2B |



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:05Z
Check the source to verify that this is the current version before use.

TABLE II. Group qualification.

| Submission and qualification of the following dash numbers | Qualifies the following dash numbers |
|---|---|
| -1, -2, -5, or -6 | -1, -2, -5, or -6 |
| -3, -4 | |
| -3, -4, -7, -8, -9, -10, -11, or -12 | -1 thru -12 |

Ⓓ TABLE III. Supersession data.

| Part number M641/19 | Manufacturers' part number | Manufacturer FSCM |
|---|---|---|
| -5 | WTT-32BFM | 82389 |
| -6 | TT-32BFM | 82389 |
| -7 | WTT-34BFM | 82389 |
| -8 | TT-34BFM | 82389 |
| -9 | PJ-805W | 70674 |
| -10 | PJ-805 | 70674 |

Ⓓ TABLE IV. Mating plugs.

| Dash number | Mating plug |
|---|---|
| -1 | M642/13-1, -2, |
| -2 | |
| -3 | |
| -4 | |
| -5 | |
| -6 | |
| -7 | |
| -8 | |
| -9 | |
| -10 | |
| -11 | |
| -12 | M642/13-1, -2, |

Custodians:
Army - CR
Navy - EC
Air Force - 11

*Review activities:*
Army - AR, ME, MI,
Navy - AS
Air Force - 85, 99
DLA - ES

User activities:
Army - AV
Navy - AS, MC, YD
Air Force - 17, 19

Preparing acitivty:
Army - CR

Agent:
DLA - ES

(Project 5935-3026-1)



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:05Z
Check the source to verify that this is the current version before use.

# STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

MIL-J-641/19D

NAME OF ORGANIZATION AND ADDRESS

HQ, USA CORADCOM
ATTN: DRDCO-CM-DM
Fort Monmouth, NJ 07703

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:05Z
Check the source to verify that this is the current version before use.

FOLD

HQ. USA CORADCOM
ATTN: DRDCO-CM-DM
Fort Monmouth, NJ 07703

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314




HQ, USA CORADCOM
ATTN: DRDCO-CM-DM
Fort Monmouth, NJ 07703

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:05Z
Check the source to verify that this is the current version before use.