
INCH-POUND
MIL-J-641/20A
12 November 1993
SUPERSEDING
MIL-J-641/20
26 February 1979


MILITARY SPECIFICATION SHEET

JACKS, (BANTAM) TELEPHONE, 3 CONDUCTOR, TRIPLE

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-J-641

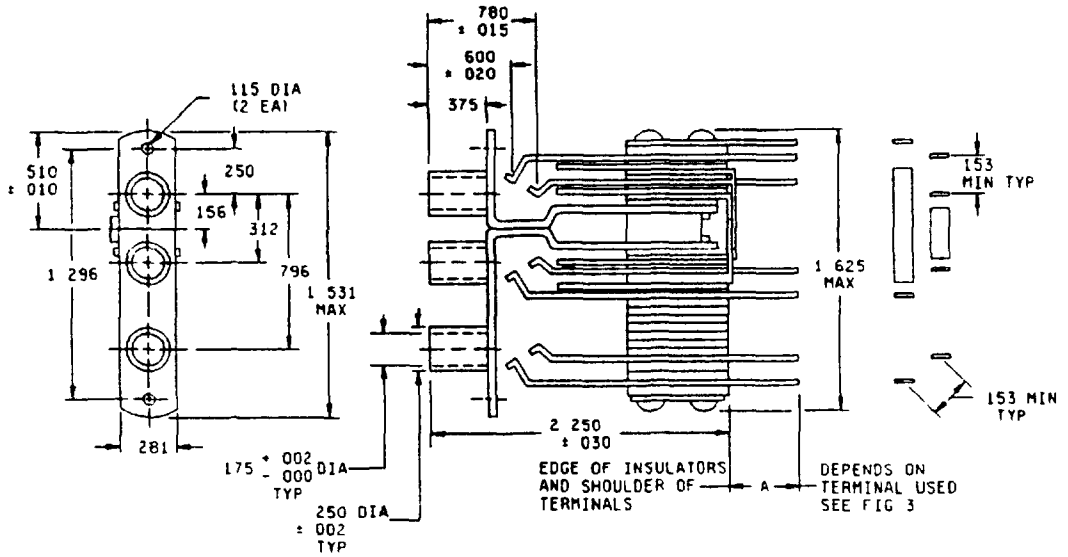




CIRCUIT DIAGRAM

Dash nos -1 and -2 (4 breaks connected and monitor)

FIGURE 1 Dimensions and configurations

DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:05Z
Check the source to verify that this is the current version before use.

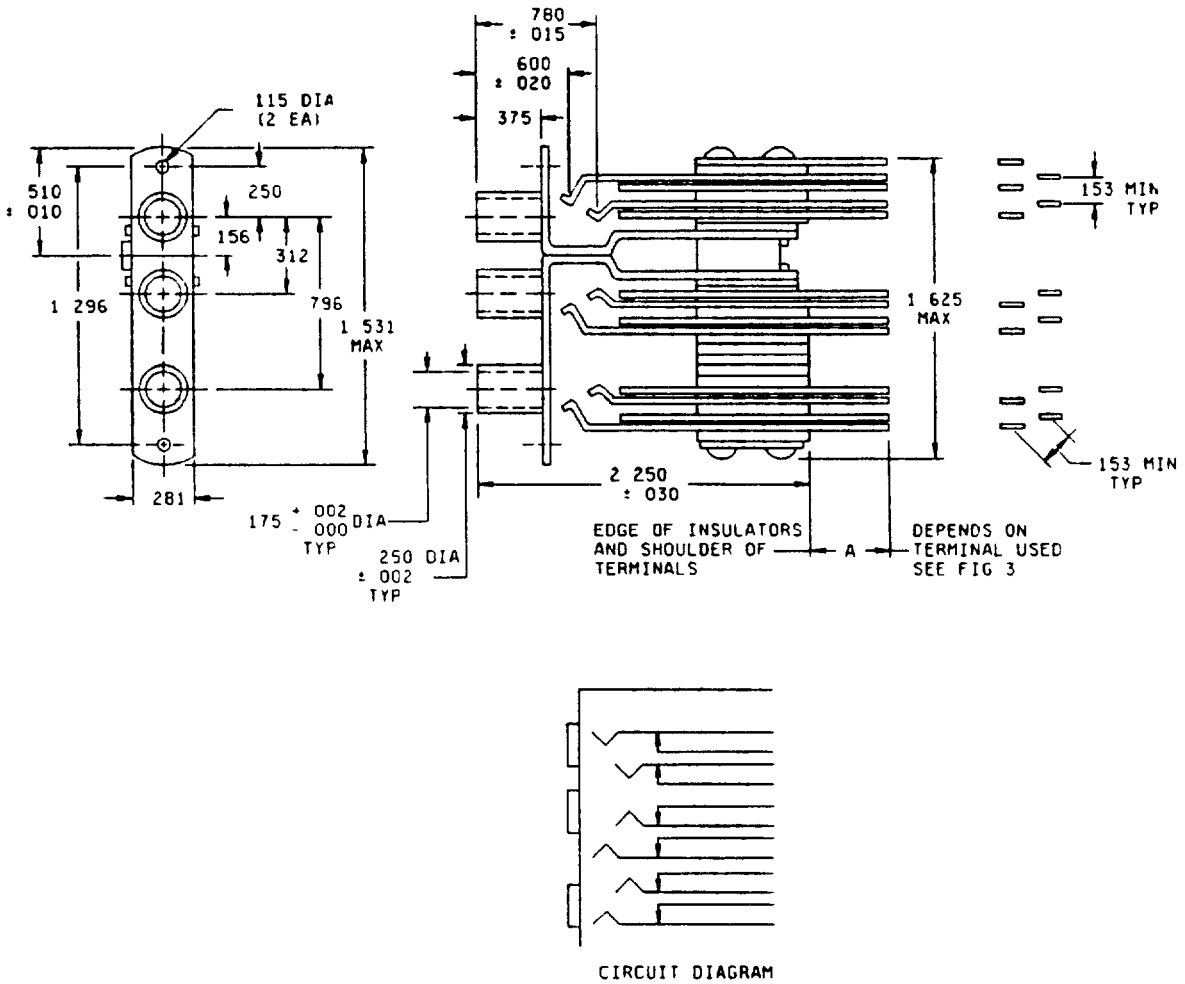



CIRCUIT DIAGRAM

Dash nos -3 and -4 (6 breaks)

FIGURE 1 Dimensions and configurations - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:05Z
Check the source to verify that this is the current version before use.

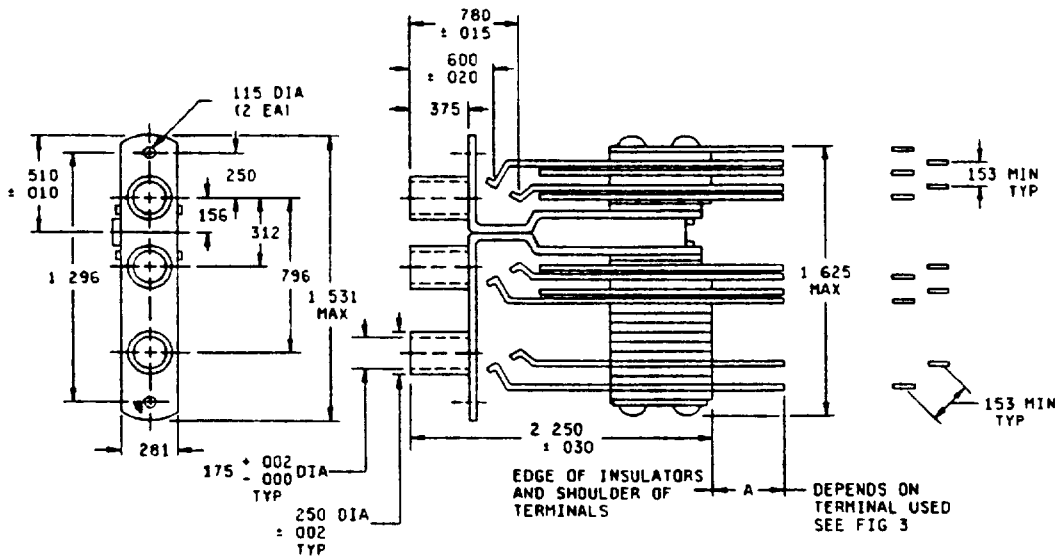



CIRCUIT DIAGRAM


Dash nos -5 and-6 (4 breaks and monitor)

Inches	mm	Inches	mm
002	0.05	.250	6.35
.010	0 25	.279	7 09
015	0 38	.281	7.14
020	0 51	.375	9.52
.030	0 76	.578	14 68
.035	0 89	600	15.24
.0625	1 588	65	16 5
153	3 89	780	19 81
175	4.44	2 250	57.15

NOTES
1. Dimensions are in inches
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerance is ± 005 (0 13 mm).
4. All dimensions are after plating
5. Wire shunts are permitted
6. All undimensioned pictorial features are for reference purposes only.
7. For wirewrap type jacks, terminal and contact interconnecting jumpers shall not interfere with commonly used wirewrap tools

FIGURE 1 Dimensions and configurations - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:05Z
Check the source to verify that this is the current version before use.

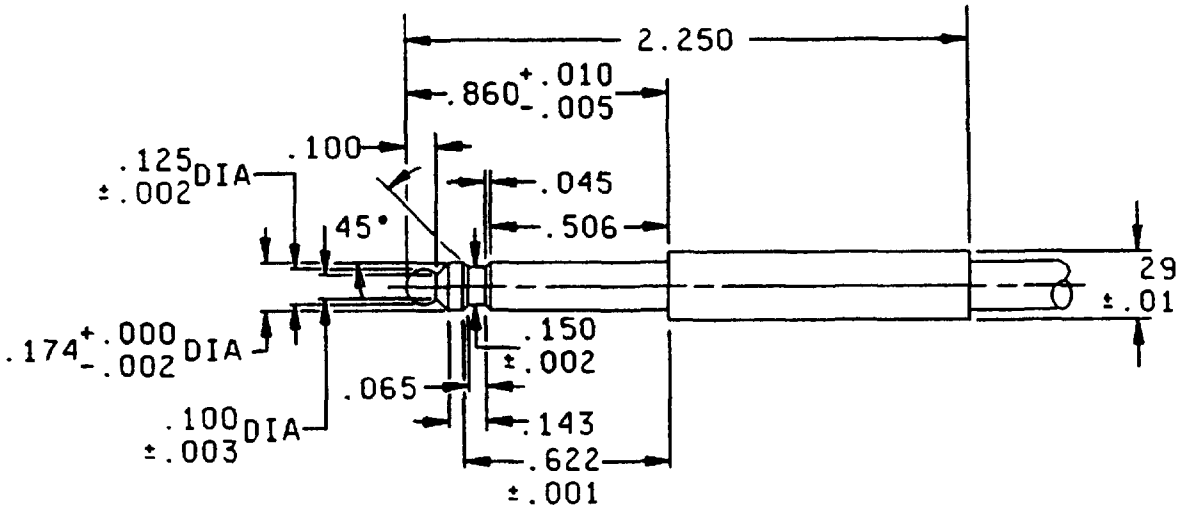


Inches	mm	Inches	mm	Inches	mm
001	0 03	065	1 65	29	7 4
002	0 05	100	2 54	506	12 85
003	0 08	125	3 18	622	15 80
005	0 13	143	3 63	860	21.84
010	0.25	150	3 81	2 250	57 15
045	1.14	174	4 42		

NOTES
1. Dimensions are in inches
2. Metric equivalents are given for information only
3. Unless otherwise specified, tolerances are ± 005 (0 13 mm) and 1° on angles
4. Finger shall be hardened to Rockwell C 60-62, polished, and then hard-chromium plated to .0003 inch (0.008 mm) maximum thickness
5. All dimensions are after plating
6. Concentricity shall be .003 (0 08 mm) total indicator reading

FIGURE 2 Test plug TP-777

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:05Z
Check the source to verify that this is the current version before use.

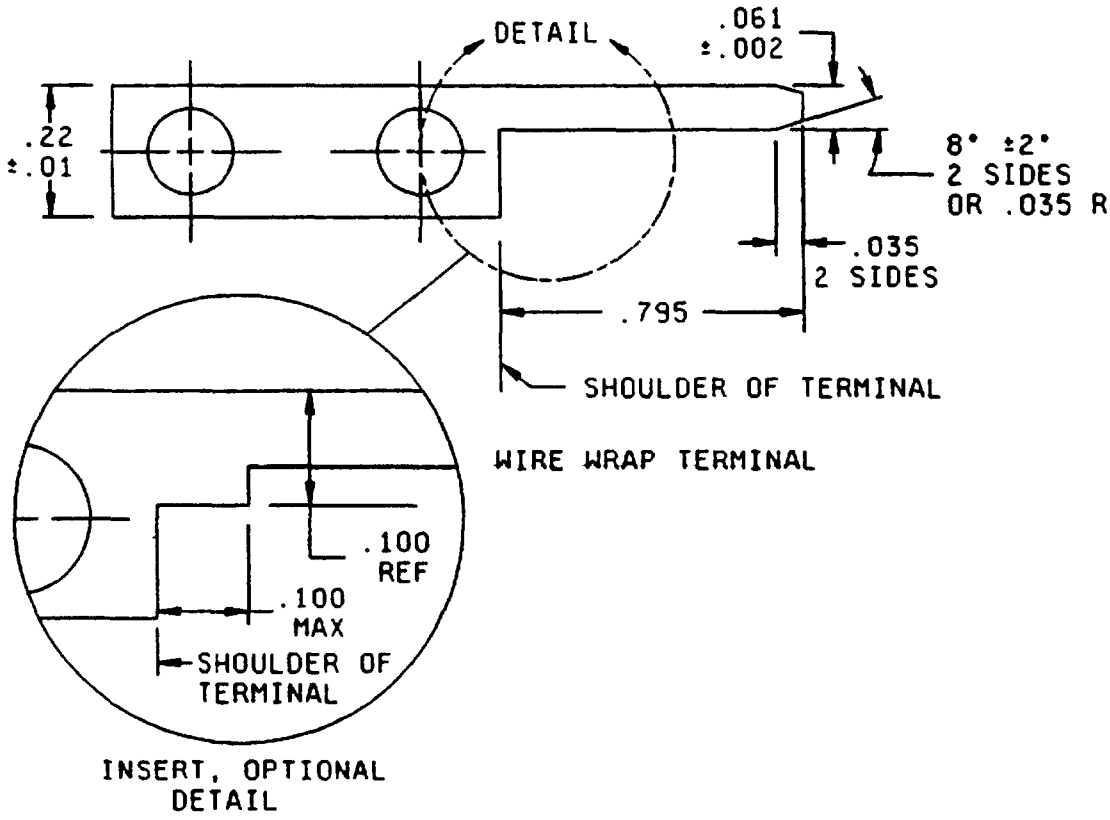

Inches	mm	Inches	mm
.002	0.05	100	2.54
.01	0 3	.22	5 6
.035	0.89	795	20 19
.061	1.55		

NOTES
1. Dimensions are in inches
2. Metric equivalents are given for information only
3. Unless otherwise specified, tolerance is ± 005 (0 13 mm).
4. Solder lug terminals (not shown) shall meet the requirements of MIL-J-641, 3.5 5, and the "A" dimension of figure 1 shall be 325 inch (8.26 mm) maximum
5. All dimensions are after plating

FIGURE 3. Terminals

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:05Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configurations See figure 1.

Terminals See figure 3 (wirewrap) or MIL-J-641 (solder lug)

Materials:
Springs Nickel silver
Contact Palladium or gold alloy

Insertion and withdrawal forces:
Insertion force 7 pounds maximum
Withdrawal force 1.0 pound minimum, 7 pounds maximum
Test plug TP-777 (see figure 2)

Spring life Test plug TP-777 shall be used

Frame strength Frame strength test is applicable Load - 7 pounds maximum

Terminal of tip contact spring shall be on the right side when terminals are viewed from the rear, with the jack in a position such that the contact spring pileup is on top of the jack frame

Cutout in the jack frame shall be positioned so that a minimum of .016-inch clearance exists between the tip of the TP-777 plug and the edge of the frame cutout at all times during insertion of the plug.

All terminals shall be stacked as shown on schematic (see figure 1).

Part or Identifying Number (PIN) M641/20 - (dash number from table I)

Mating plugs See table II

TABLE I Dash numbers and characteristics

Dash number	Connection	Mounting	Switching action	Terminal
-1	"	Double lug	4 breaks connected and monitor	Wirewrap
-2	"	"	4 breaks connected and monitor	Solder lug
-3	"	"	6 breaks	Wirewrap
-4	"	"	6 breaks	Solder lug
-5	"	"	4 breaks and monitor	Wirewrap
-6	"	"	4 breaks and monitor	Solder lug

TABLE II Mating plugs

Dash number	Mating plug
-1	M642/13-1, -2, -3, -4
-2	"
-3	"
-4	"
-5	"
-6	"

Revision letters are not used to denote changes due to the extensiveness of the changes

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:05Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians
Army - CR
Navy - EC
Air Force - 85

Review activities
Army - AR, AV, ME, MI
Navy - AS, MC, SH
Air Force - 17, 19, 99
DLA - ES

Preparing activity
Army - CR

Agent.
DLA - ES

(Project 5935-3910-02)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:05Z
Check the source to verify that this is the current version before use.