
MILITARY SPECIFICATION SHEET

JACK, (BANTAM) TELEPHONE
3 CONDUCTOR, DOUBLE

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the jacks described herein shall consist of this document and the latest issue of Specification MIL-J-641.

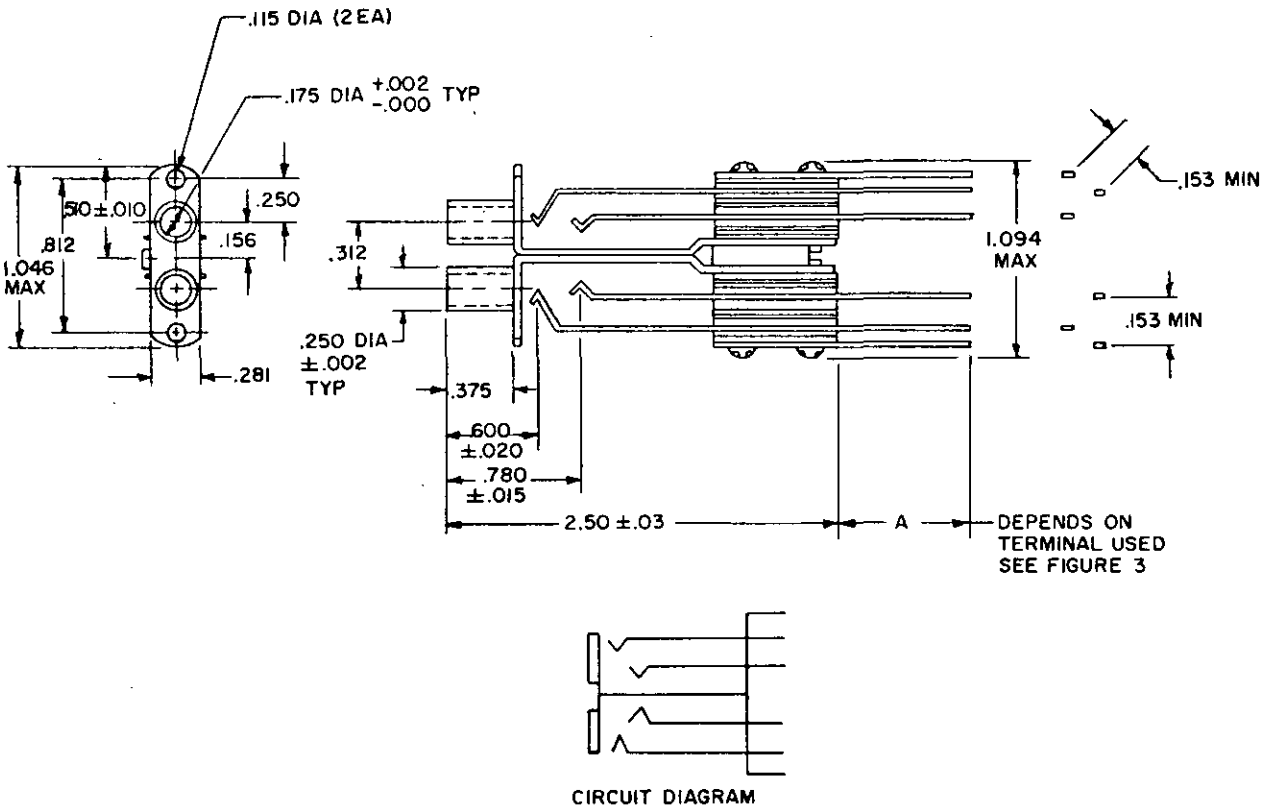

-1 and -2 (no breaks)

FIGURE 1. Dimensions and configurations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:06Z
Check the source to verify that this is the current version before use.


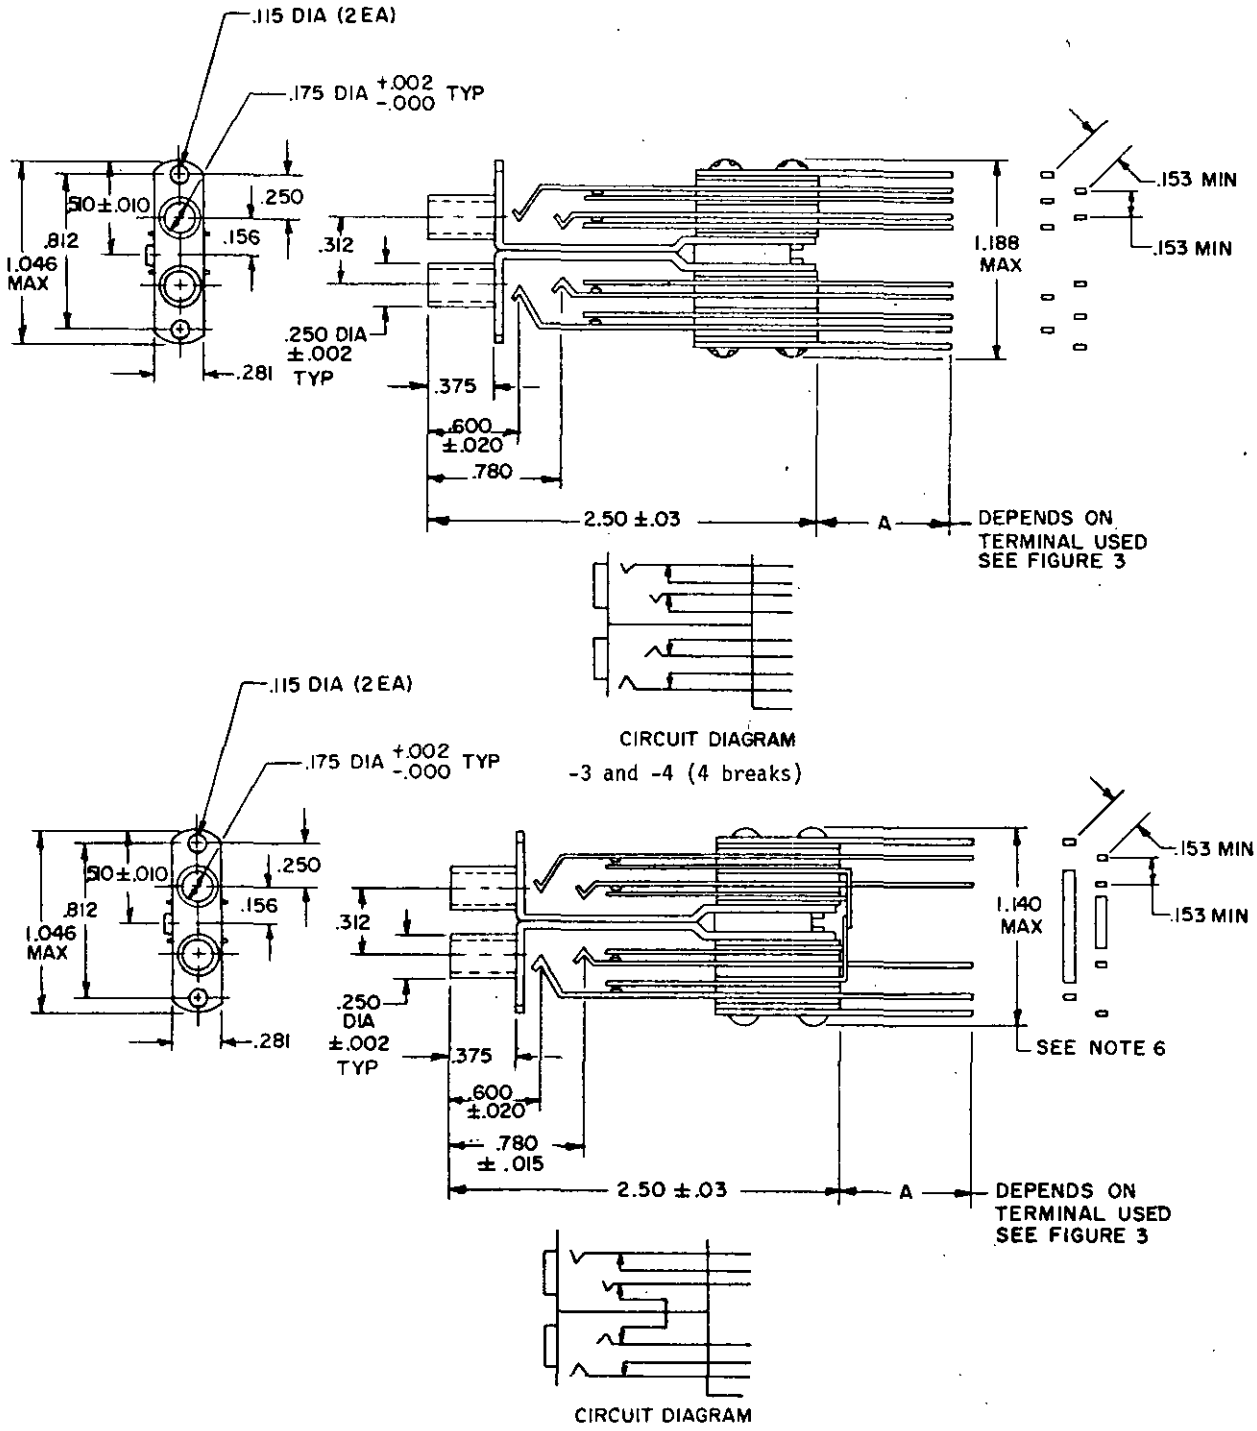



FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:06Z
Check the source to verify that this is the current version before use.

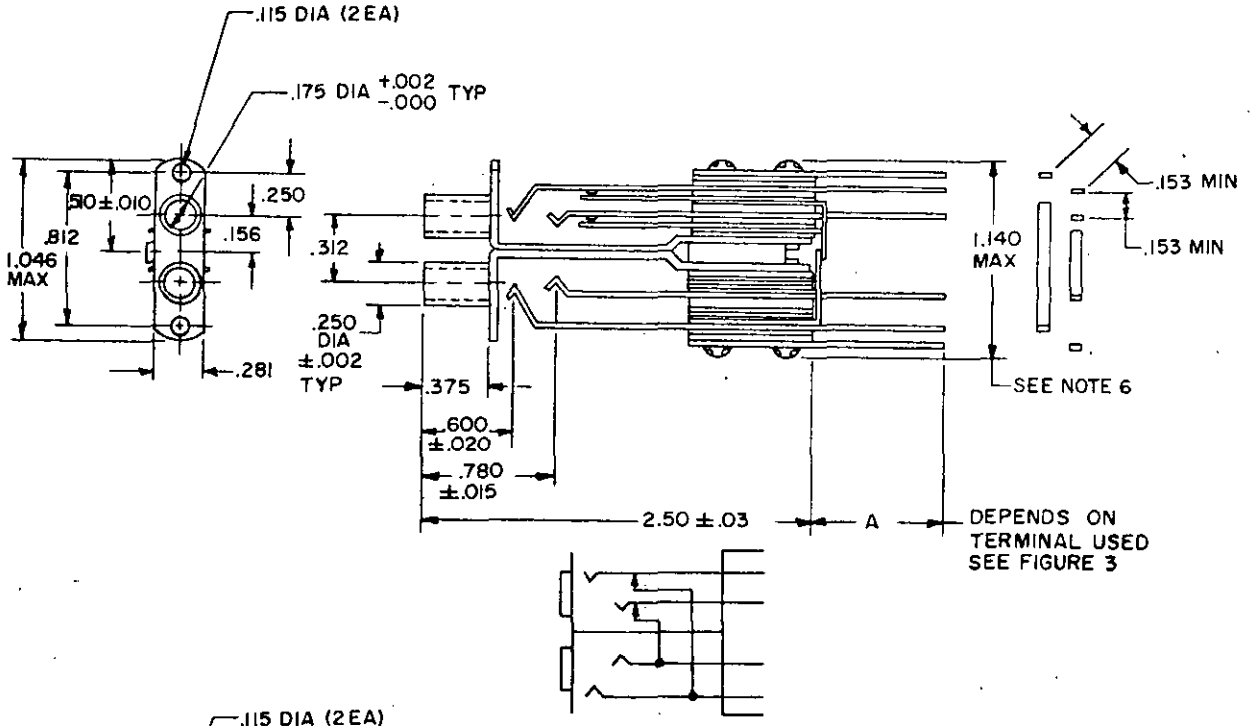

CIRCUIT DIAGRAM

-7 and -8 (2 breaks connected)

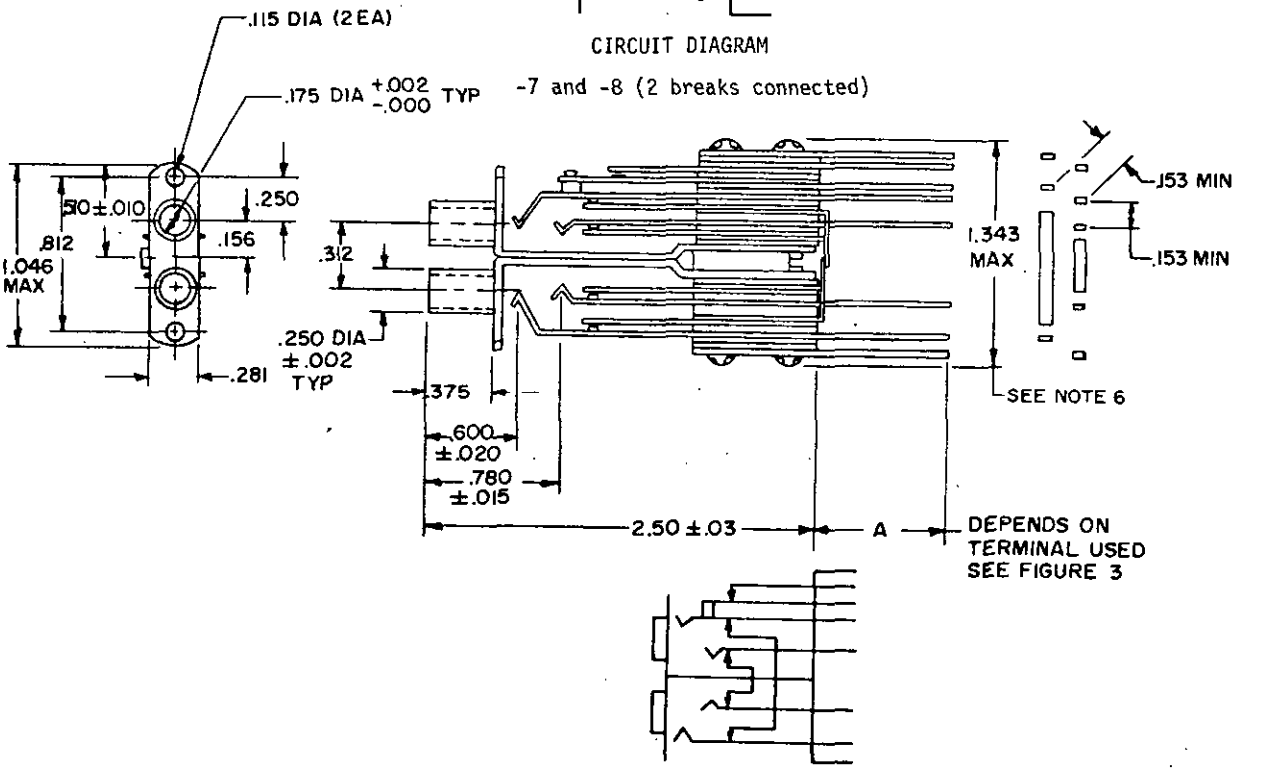


CIRCUIT DIAGRAM

-9 and -10 (4 breaks connected, 1 make)

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:06Z
Check the source to verify that this is the current version before use.

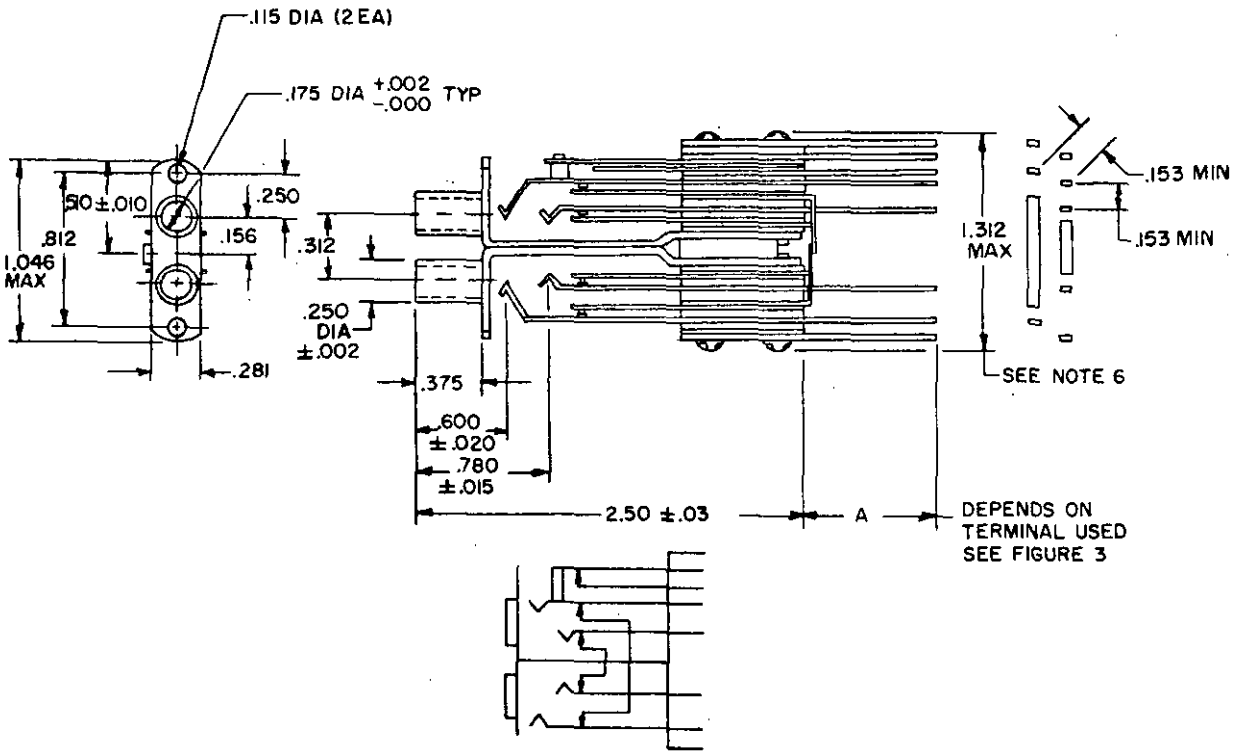

CIRCUIT DIAGRAM


-11 and -12 (5 breaks, 4 connected)

INCHES	MM	INCHES	MM	INCHES	MM
.002	.05	.175	4.44	.812	20.62
.010	.25	.250	6.35	1.046	26.57
.015	.38	.281	7.14	1.094	27.79
.020	.51	.312	7.92	1.140	28.96
.03	.8	.375	9.52	1.188	30.18
.115	2.92	.510	12.95	1.312	33.32
.153	3.89	.600	15.24	1.343	34.11
.156	3.96	.780	19.81	2.50	63.5

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.005 (.13 mm).
4. All dimensions are after plating.
5. Wire shunts are permitted.

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:06Z
Check the source to verify that this is the current version before use.

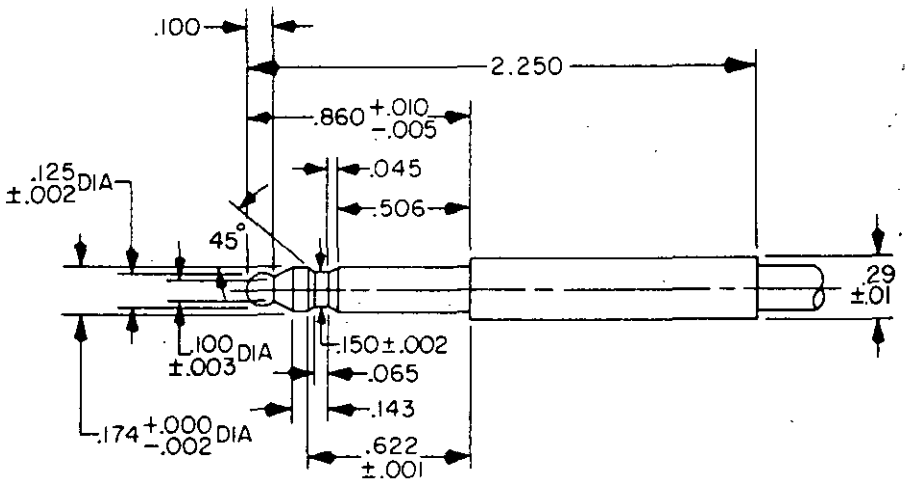



INCHES	MM	INCHES	MM	INCHES	MM
.001	.03	.065	1.65	.29	7.4
.002	.05	.100	2.54	.506	12.85
.003	.08	.125	3.18	.622	15.80
.005	.13	.143	3.63	.860	21.84
.010	.25	.150	3.81	2.250	57.15
.045	1.14	.174	4.42		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are ±.005 (.13 mm) and ±1° on angles.
4. The material shall be brass.
5. Finger shall be hardened to Rockwell C 60-62, polished and then hard-chromium plated to .0003 (.008 mm) maximum thickness.
6. All dimensions are after plating.
7. Concentricity shall be .003 (.08 mm) total indicator reading.

FIGURE 2. Test plug TP-711.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:06Z
Check the source to verify that this is the current version before use.

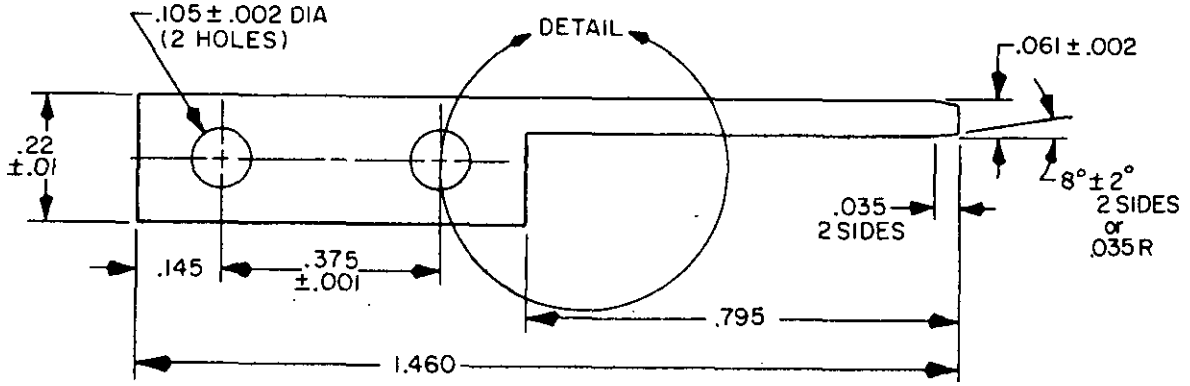



INSERT, OPTIONAL
DETAIL

INCHES	MM	INCHES	MM	INCHES	MM
.001	.03	.061	1.55	.145	3.68
.002	.05	.091	2.31	.22	5.6
.01	.3	.100	2.67	.375	9.52
.035	.89	.105	2.54	.795	20.19
				1.460	37.08

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.005 (.13 mm).
4. *Solder lug terminals shall meet the requirements of MIL-J-641, 3.5.5, A dimension* shall be .325 (8.26 mm) maximum.
5. All dimensions are after plating.

FIGURE 3. Terminals.

Source: https://assist.dla.mil- Downloaded: 2026-10-16T11:06Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Materials:
Frame: Steel.
Sleeve: Brass.
Springs: Nickel silver.
Contact: Palladium or gold alloy.

Insertion and withdrawal forces: The insertion and withdrawal forces shall be as follows:
Insertion force: 7 pounds (maximum).
Withdrawal force: 1.0 pound (minimum); 7 pounds (maximum).
Test plug: TP-777 (see figure 2).

Spring life: Test plug TP-777 shall be used.

Frame strength: Frame strength test is applicable. Load - 7 pounds maximum.

Terminal of tip contact spring shall be on right side when terminals are viewed from the rear, with the jack in a position such that the contact spring pileup is on top of the jack frame.

Cutout in jack frame shall be positioned so that a minimum of .016-inch clearance exists between the tip of the TP-777 plug and the edge of the frame cutout at all times during insertion of the plug.

All terminals shall be stacked as shown in schematic (see figure 1).

Mating plugs: See table II.

Part number: M641/21- (dash number, see table I).

TABLE I. Dash numbers and characteristics.

Dash number	Connection	Mounting	Switching action	Terminal
-1	Tip, Ring and sleeve	Double lug	None	Wire wrap
-2			None	Solder lug
-3			4 breaks	Wire wrap
-4			4 breaks	Solder lug
-5			4 breaks connected	Wire wrap
-6			4 breaks connected	Solder lug
-7			2 breaks connected	Wire wrap
-8			2 breaks connected	Solder lug
-9			4 breaks connected, 1 make	Wire wrap
-10			4 breaks connected, 1 make	Solder lug
-11			5 breaks, 4 connected	Wire wrap
-12			5 breaks, 4 connected	Solder lug

Source: https://assist.dla.mil - Downloaded: 2026-10-16T11:06Z
Check the source to verify that this is the current version before use.

TABLE II. Mating plugs.

Dash number	Mating plug
-1	M642/13 -1, -2, -3, -4
-2	
-3	
-4	
-5	
-6	
-7	
-8	
-9	
-10	
-11	
-12	M642/13 -1, -2, -3, -4

Custodians:
Army - CR
Navy - EC
Air Force - 11

Review activities:
Army - AR, ME, MI,
Navy - AS
Air Force - 85, 99
DLA - ES

User activities:
Army - AV
Navy - AS, MC, YD
Air Force - 17, 19

Preparing activity:
Army - CR

Agent:
DLA - ES

(Project 5935-3026-3)

☆U.S. GOVERNMENT PRINTING OFFICE: 1979-603-022/1373

Source: https://assist.dla.mil Downloaded: 2026-10-16T11:06Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

MIL-J-641/21

NAME OF ORGANIZATION AND ADDRESS

HQ, USA CORADCOM
ATTN: DRDCO-CM-DM
Fort Monmouth, NJ 07703

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:06Z
Check the source to verify that this is the current version before use.

FOLD

HQ, USA CORADCOM
ATTN: DRDCO-CM-DM
Fort Monmouth, NJ 07703

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314



HQ, USA CORADCOM
ATTN: DRDCO-CM-DM
Fort Monmouth, NJ 07703

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:06Z
Check the source to verify that this is the current version before use.