MILITARY SPECIFICATION SHEET

JACK, TELEPHONE, U-385/U

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense

The complete requirements for procuring the jacks described herein shall consist of this document and the latest issue of Specification MIL-J-641.


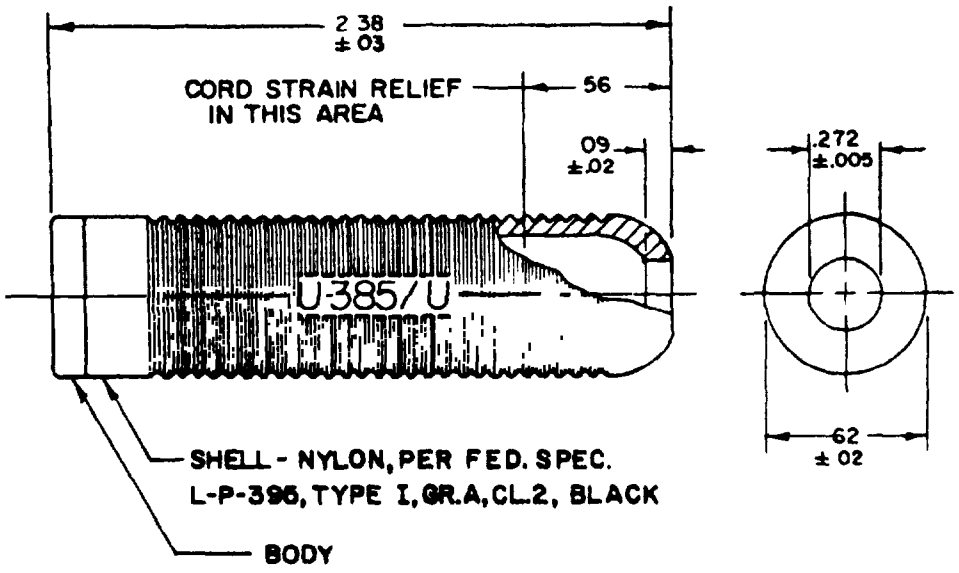



FIGURE 1 Dimensions and configurations



FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:06Z
Check the source to verify that this is the current version before use.

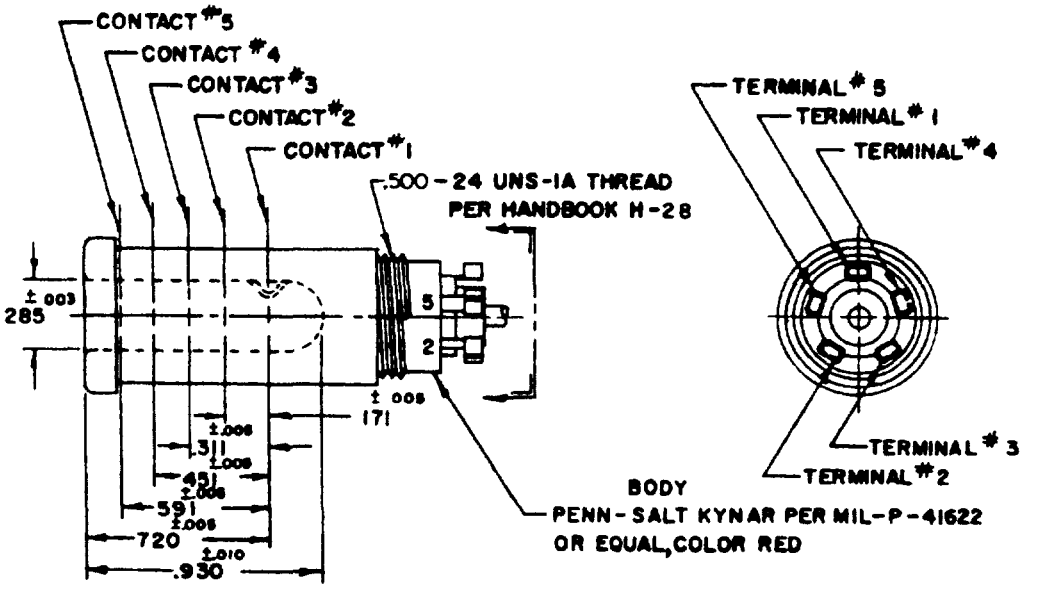


| INCHES | MM | INCHES | MM |
|---|---|---|---|
| .003 | .08 | .311 | 7 90 |
| 005 | 13 | 451 | 11.46 |
| 02 | 5 | 56 | 14 2 |
| 03 | 8 | .591 | 15.01 |
| 09 | 2.3 | .62 | 15.7 |
| .171 | 4.34 | .720 | 18.29 |
| .272 | 6.91 | .930 | 23.62 |
| .285 | 7.24 | 2.38 | 60 45 |

NOTES:
1. Dimensions are in inches.
2 Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3 Unless otherwise specified, tolerance is ± 005 (.13 mm).
4 All dimensions are after plating
5 Contact tolerances are not cumulative.

FIGURE 1 Dimensions and configurations - Continued



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:06Z
Check the source to verify that this is the current version before use.

REQUIREMENTS.

Dimensions and configuration  See figure 1.

Materials·
  Frame  Steel
  Sleeve  Brass
  Springs  Nickel silver.
  Contact.  Palladium or gold alloy

Cable clamp  The cable clamp requirement is applicable.

The cable clamp shall anchor cable having diameters from .220 to .275.

Insertion and withdrawal forces  The insertion and withdrawal forces shall be as follows
  Insertion force  10 pounds (maximum).
  Withdrawal force.  6 0 pounds (minimum), 10 pounds (maximum).
  Test plug  TP-777 (see figure 2)

Spring life  Test plug TP-385 shall be used.

Frame strength.  Frame strength test is applicable.  Load - 20 pounds (maximum)

Conductor strain relief  The conductor strain relief requirement is applicable.

Strain relief·  The strain relief test is applicable

Contact spring pressure  The contact spring pressure test is applicable

Contact spring overtravel  The contact spring overtravel test is applicable.

Static load.  The static load test is applicable

Longitudinal pull  The longitudinal pull test is applicable.

Solder lug terminals  The solder terminal for each spring contact shall be so shared and
  located to accomodate two #23 AWG (21 strands of #36) conductors

Shell  Shall be nylon, per L-P-395, type I, grade A, class 2, black.

Body·  Shall be Penn-Salt Kynar per MIL-P-41622 or equal, color red.

Weight·  The weight of the jack shall not exceed 16 grams

Marking  The jack shall be marked with the part number and U-385/U

Mating plug  M642/14-1

Part number  M641/22-01.



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:06Z
Check the source to verify that this is the current version before use.

Custodians
Army - CR
Navy - EC
Air Force - 11

Review activities.
Army - AR, ME, MI,
Navy - AS
Air Force - 85, 99
DLA - ES

User activities·
Army - AV
Navy - AS, MC, YD
Air Force - 17, 19

Preparing activity
Army - CR

Agent
DLA - ES

(Project 5935-3026-4)



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:06Z
Check the source to verify that this is the current version before use.

# STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No 22 R255

INSTRUCTIONS The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document DoD contractors, government activities or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government Fold on lines on reverse side, staple in corner, and send to preparing activity Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements Attach any pertinent data which may be of use in improving this document If there are additional papers, attach to form and place both in an envelope addressed to preparing activity

DOCUMENT IDENTIFIER AND TITLE

MIL-J-641/22

NAME OF ORGANIZATION AND ADDRESS

HQ. USA CORADCOM
ATTN DRDCO-CM-DM
Fort Monmouth, NJ 07703

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1 HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3 IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4 REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:06Z
Check the source to verify that this is the current version before use.

FOLD

HQ, USA CORADCOM
ATTN DRDCO-CM-DM
Fort Monmouth, NJ 07703

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314



HQ, USA CORADCOM
ATTN DRDCO-CM-DM
Fort Monmouth, NJ 07703

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:06Z
Check the source to verify that this is the current version before use.