MILITARY SPECIFICATION SHEET

# CONNECTORS, PLUG, TELEPHONE (TYPES PJ-051B AND PJ-051R) AND ACCESSORY SCREWS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the plugs described herein shall consist of this specification and the latest issue of MIL-P-642.


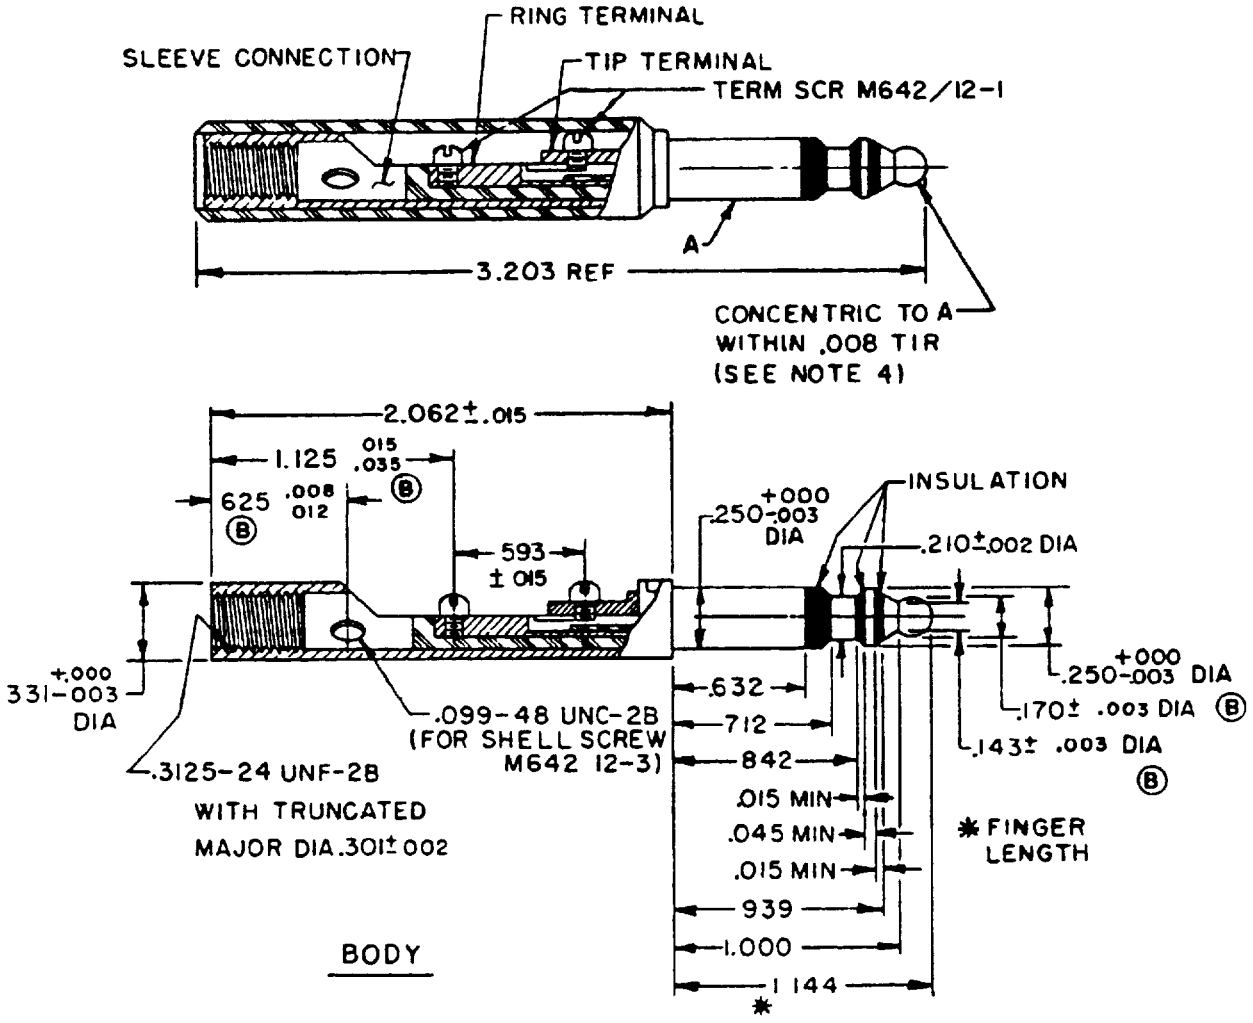



FIGURE 1. Dimensions and configurations.

Ⓑ denotes changes


DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
Source: https://assist.dla.mil -- Downloaded: 202640-16T11:07Z
Check the source to verify that this is the current version before use.

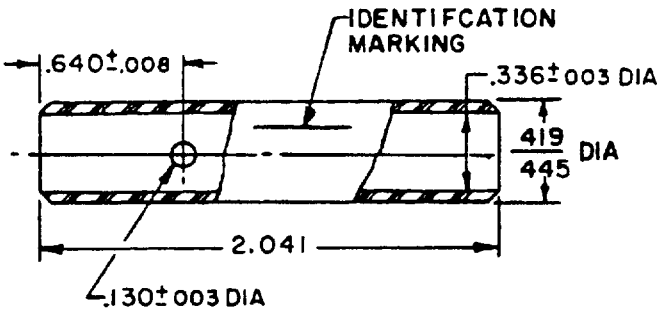


SHELL

| Inches | mm | Inches | mm | Inches | mm |
|---|---|---|---|---|---|
| .002 | 0.05 | .250 | 6.35 | .640 | 16.26 |
| .003 | 0.08 | .301 | 7.65 | .712 | 18.08 |
| .008 | 0.20 | .3125 | 7.94 | .842 | 21.39 |
| .015 | 0.38 | .331 | 8.41 | .939 | 23.85 |
| .045 | 1.14 | .336 | 8.53 | 1.000 | 25.40 |
| .099 | 2.51 | .419 | 10.64 | 1.125 | 28.58 |
| .130 | 3.30 | .445 | 11.30 | 1.144 | 29.06 |
| .143 | 3.63 | .593 | 15.06 | 2.041 | 51.84 |
| .170 | 4.32 | .625 | 15.88 | 2.062 | 52.37 |
| .210 | 5.33 | .632 | 16.05 | 3.203 | 81.36 |

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.010 (0.25 mm).
4. After assembly, the eccentricity between the end of the shank and the tip of the plug shall not exceed .008 (0.20 mm) TIR (total indicator reading).

FIGURE 1 Dimension and configuration - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:07Z
Check the source to verify that this is the current version before use.

TABLE I. Types of telephone plugs.

| Dash number | Type designation | Shell material |
|---|---|---|
| 1 | PJ-051B | Black plastic |
| 2 | PJ-051R | Red plastic |

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Shell: Shall be plastic in accordance with MIL-P-642.

Terminal screws: Shall be .086-64 UNF-2A in accordance with MIL-P-642/12.

Shell screws: Shall be .099-48 UNC-2A in accordance with MIL-P-642/12.

Part number: M642/2- (dash number from table I).

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - AR, ME, MI, SL
Navy - AS
Air Force - 99
DLA - ES

User activities:
Army - AV, MI
Navy - MC, OS, SH, YD
Air Force - 17

Preparing activity:
Army - CR

Agent:
DLA - ES

(Project 5935-3552)



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:07Z
Check the source to verify that this is the current version before use.