INCH-POUND

MIL-DTL-642/3B
27 June 2014
SUPERSEDING
MIL-P-642/3A
3 July 1973

DETAIL SPECIFICATION SHEET

PLUGS TELEPHONE (TYPES PJ-054B AND PJ-054R) AND ACCESSORY SCREWS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-642.


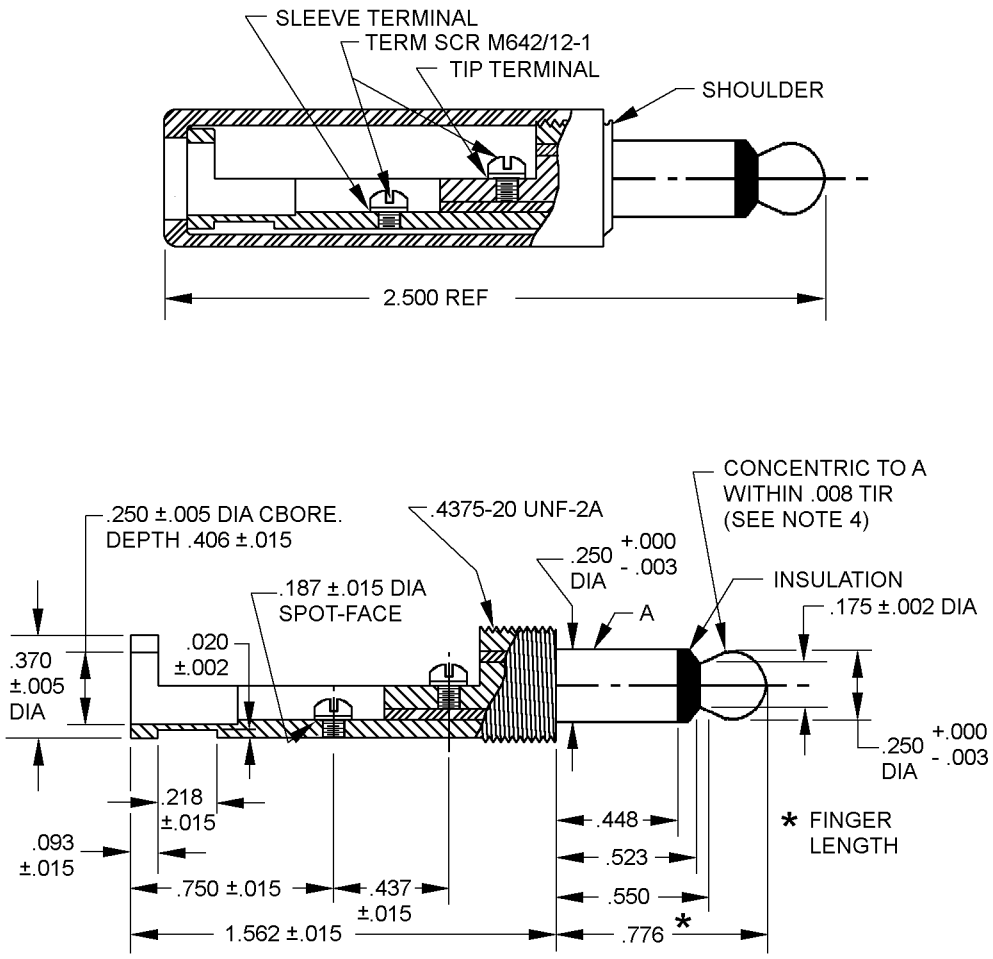


FIGURE 1. Dimensions and configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:07Z
Check the source to verify that this is the current version before use.

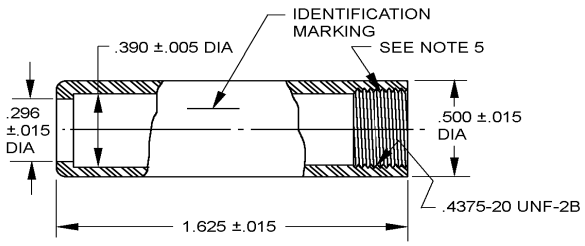

SHELL

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.002	0.05	.020	0.51	.250	6.35	.4375	11.11	.750	19.05
.003	0.08	.093	2.36	.296	7.52	.448	11.38	.776	19.71
.005	0.13	.175	4.45	.370	9.40	.500	12.70	1.562	39.67
.008	0.20	.187	4.75	.390	9.91	.523	13.28	1.625	41.28
.015	0.38	.218	2.54	.437	11.10	.550	13.97	2.500	63.50

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerance is ±.010 (.25mm).
4. After assembly, the eccentricity between the end of the shank and the tip of the plug shall not exceed .008 inch (.20mm) total indicator reading (TIR).
5. There shall be a sufficient length of thread on the shell to assure a minimum thread engagement of four full threads between the shell and the body of the plug after assembled. When the plug shell and body are assembled, the shell shall not protrude beyond the shoulder of the plug.
6. Details of this assembly shall be in accordance with drawings referenced herein and may be obtained online from http://cecom.army.mil/ or from US Army Communications-Electronics Command, 6002 Combat Drive, Aberdeen Proving Ground, MD 21005.

FIGURE 1. Dimensions and configuration - Continued.

REQUIREMENTS:

Dimensions and configuration: See figure 1.


Shell shall be plastic in accordance with MIL-DTL-642.

Terminal screws shall be .086-64 UNF-2A in accordance with MIL-DTL-642/12.

One cord clamp in accordance with Signal Corps drawing SC-A-7674 shall be supplied with each plug.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:07Z
Check the source to verify that this is the current version before use.

The Part or Identifying Number (PIN) consists of the letter M, the basic specification number, the specification sheet number, and dash number for plug type. (see table I)

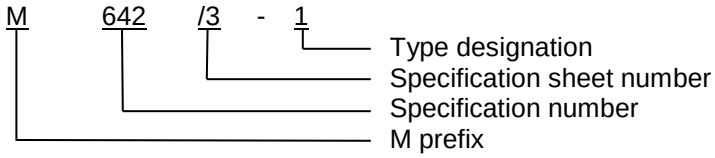

PIN example: M642/3-1 indicates type PJ-054B telephone plug.

TABLE I. PIN.

Dash number	Type designation	Shell material
1	PJ-054B	Black plastic
2	PJ-054R	Red plastic

Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Referenced documents. In addition to MIL-DTL-642 this document references the following:

MIL-DTL-642/12
SC-A-7674

CONCLUDING MATERIAL

Custodians:
Army – CR
Navy – EC
Air Force – 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5935-2013-047)

Review activities:
Army – AT, AV, CR4, MI
Navy – AS, MC, OS, SH
Air Force – 19, 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil .

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:07Z
Check the source to verify that this is the current version before use.