INCH-POUND


MIL-DTL-642/4B
23 May 2014
SUPERSEDING
MIL-P-642/4A
3 July 1973

DETAIL SPECIFICATION SHEET

PLUGS, TELEPHONE (TYPES PJ-055B, PJ-055R AND PJ-055M) AND ACCESSORY SCREWS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-642.

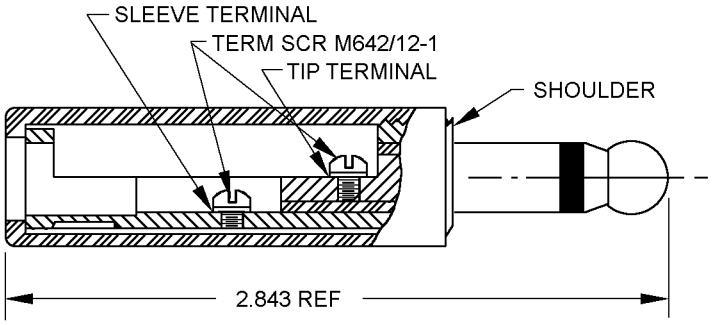


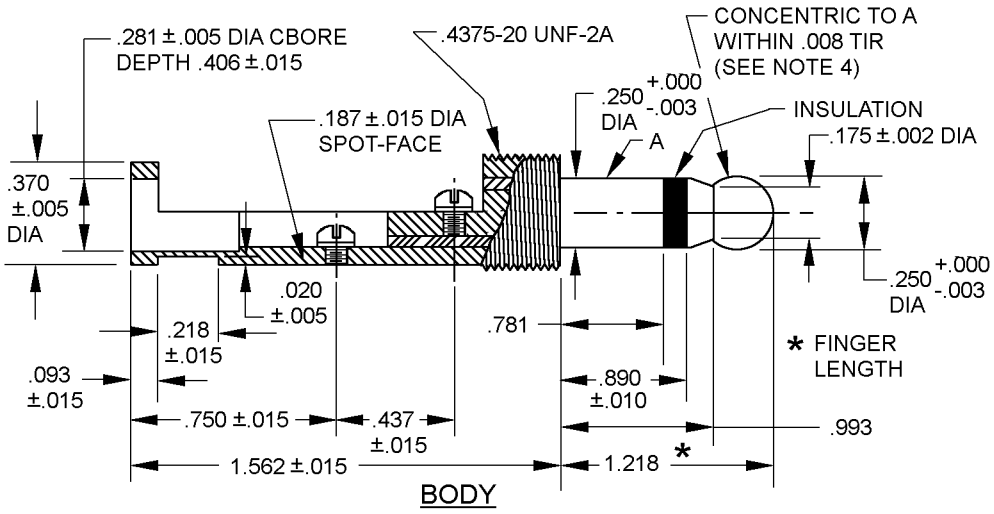


FIGURE 1. Dimensions and configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:08Z
Check the source to verify that this is the current version before use.

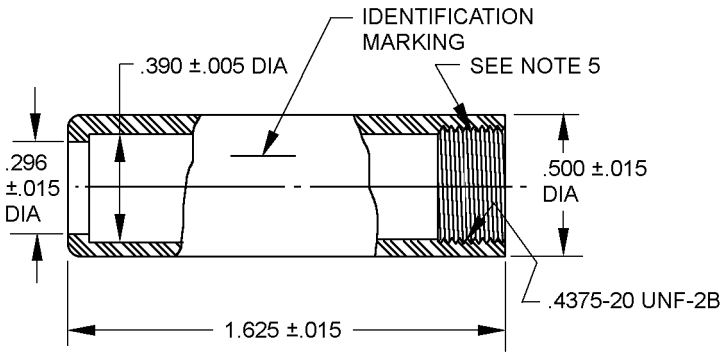

SHELL

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.002	0.05	.093	2.36	.281	5.54	.437.5	11.11	.993	25.22
.003	0.08	.175	4.45	.296	7.51	.500	12.70	1.218	30.94
.008	0.20	.187	4.75	.370	9.40	.750	19.05	1.562	39.67
.015	0.38	.218	5.54	.406	10.31	.781	19.84	1.625	41.28
.020	.051	.250	6.35	.437	11.10	.890	22.61	2.843	72.21

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerance is ±.010 (.25mm).
4. After assembly, the eccentricity between the end of the shank and the tip of the plug shall not exceed .008 inch (.20mm) total indicator reading (TIR).
5. There shall be a sufficient length of thread on the shell to assure a minimum thread engagement of four full threads between the shell and the body of the plug after assembled. When the plug shell and body are assembled, the shell shall not protrude beyond the shoulder of the plug.
6. Details of this assembly shall be in accordance with drawings referenced herein and may be obtained online from http://cecom.army.mil/ or from US Army Communications-Electronics Command, 6002 Combat Drive, Aberdeen Proving Ground, MD 21005.

FIGURE 1. Dimensions and configuration - Continued.

REQUIREMENTS:

Dimensions and configuration: See figure 1.


Shell types PJ-055B and PJ-055R shall be plastic in accordance with MIL-DTL-642. Type PJ-055M shall be metal.

Terminal screws shall be .086-64 UNF-2A in accordance with MIL-DTL-642/12.

One cord clamp in accordance with Signal Corps drawing SC-A-7674 shall be supplied with each plug.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:08Z
Check the source to verify that this is the current version before use.

The Part or Identifying Number (PIN) consists of the letter M, the basic specification number, the specification sheet number, and dash number for plug type. (see table I)

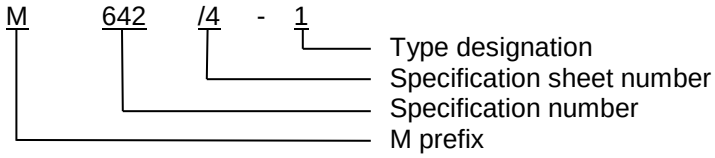

PIN example: M642/4-1 indicates type PJ-055B telephone plug.

TABLE I. PIN.

Dash number	Type designation	Shell material
1	PJ-055B	Black plastic
2	PJ-055R	Red plastic
3	PJ-055M	Metal

Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Referenced documents. In addition to MIL-DTL-642 this document references the following:

MIL-DTL-642/12
SC-A-7674

CONCLUDING MATERIAL

Custodians:
Army – CR
Navy – EC
Air Force – 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5935-2013-048)

Review activities:
Army – AT, AV, CR4, MI
Navy – AS, MC, OS, SH
Air Force – 19, 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:08Z
Check the source to verify that this is the current version before use.