INCH-POUND

MIL-DTL-642/5B
w/AMENDMENT 1
18 August 2026
SUPERSEDING
MIL-DTL-642/5B
9 June 2003

DETAIL SPECIFICATION SHEET

PLUGS, TELEPHONE (TYPE PJ-068)

This specification is approved for use by all
Departments and agencies of the Department of Defense.

The requirements for acquiring the product described herein
shall consist of this specification sheet and MIL-DTL-642.


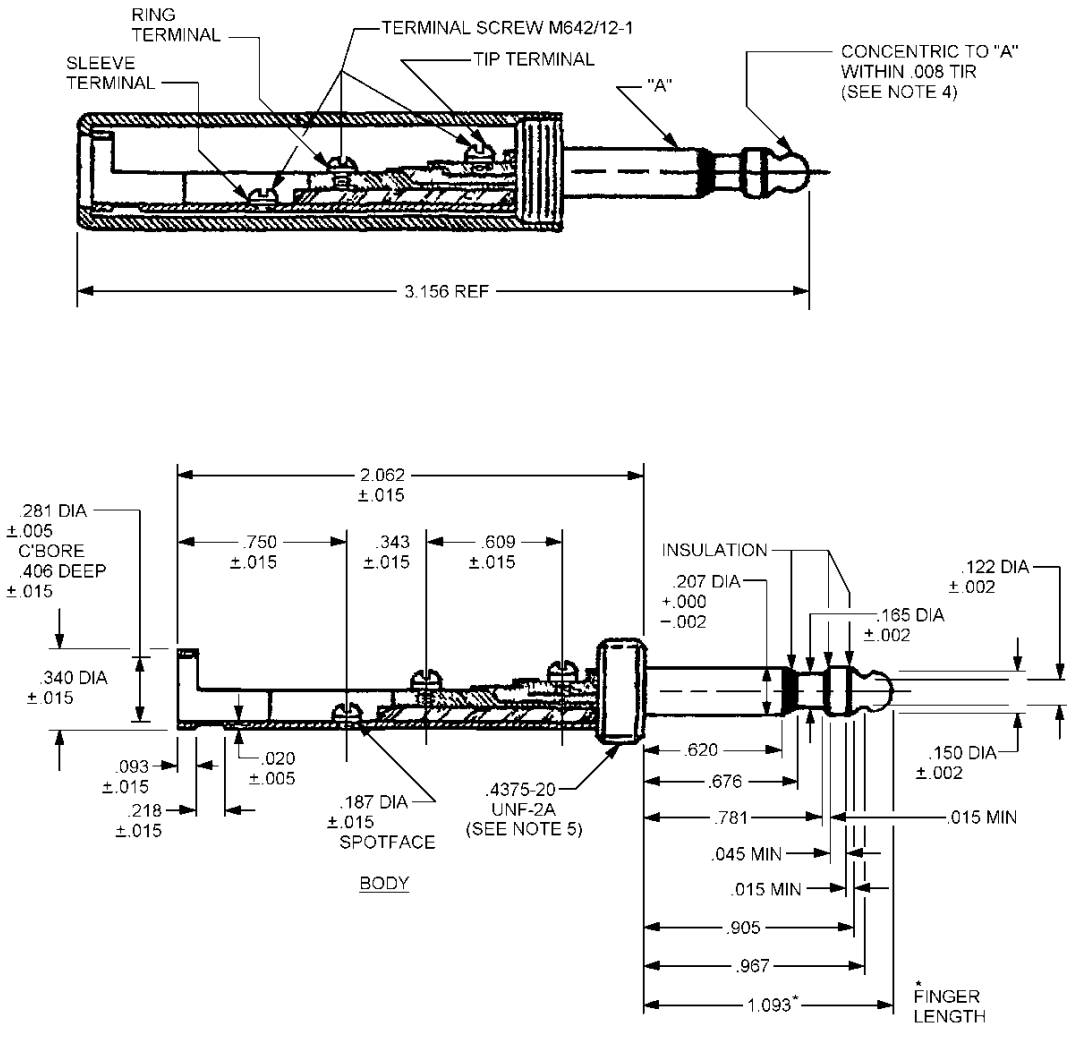


FIGURE 1. Dimensions and configuration.

AMSC N/A
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:08Z
Check the source to verify that this is the current version before use.

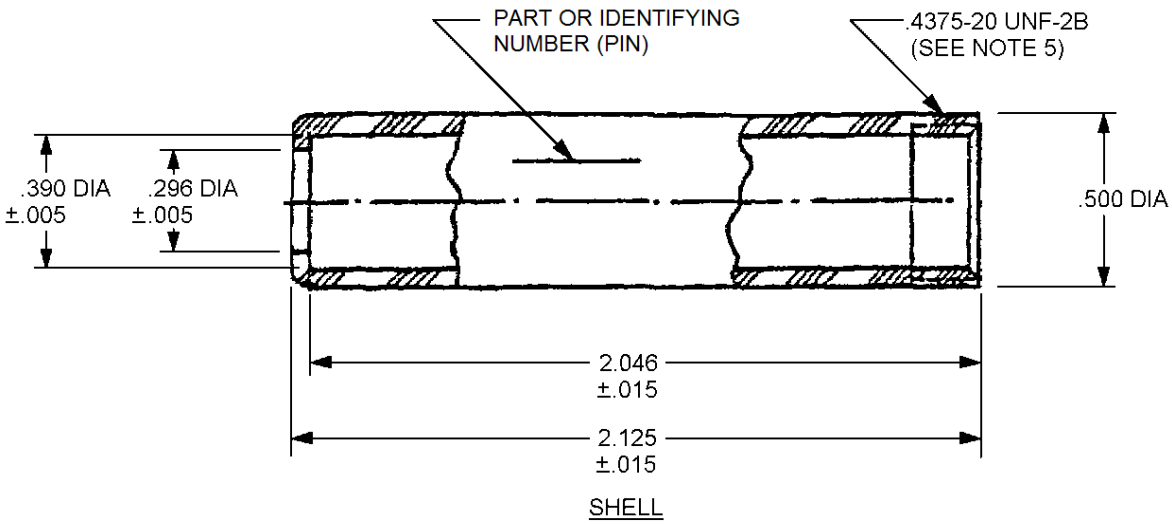


NOTES:

1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ± .010
3. After assembly, the eccentricity between the end of the shank and the tip of the plug shall not exceed .008 TIR (total indicator reading).
4. Thread shall be in accordance with FED-STD-H28, and there shall be sufficient length of thread on the shell to assure a minimum thread engagement of four full threads between the shell and the body of the plug after assembled. When the plug shell and body are assembled, the shell shall not protrude beyond the shoulder of the plug.

FIGURE 1. Dimensions and configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:08Z
Check the source to verify that this is the current version before use.

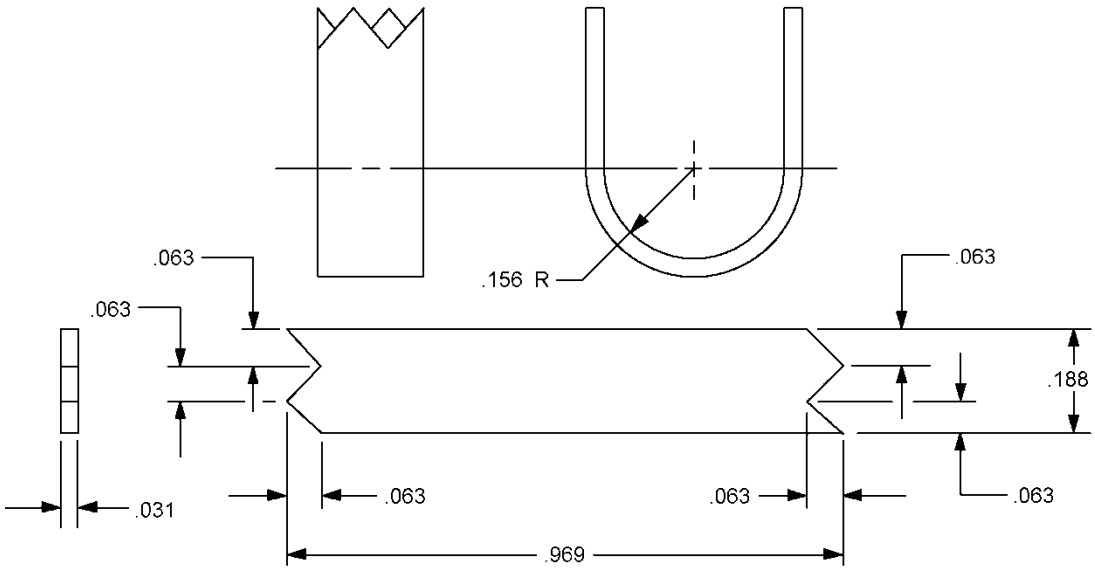

NOTES:

1. Material shall be steel, as rolled, condition no. 3 quarter hard temper, regular bright finish, in accordance with ASTM-A109/109M.
2. Finish shall be cadmium plate in accordance with SAE-AMS-QQ-P-416, type II, class C, or zinc coat, .0002 inch thick, with chromate treatment, in accordance with ASTM B633.
3. Remove all burrs and sharp edges.

FIGURE 2. Collar, cable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:08Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configurations: See figures 1 and 2.

Shell: Shall be black plastic in accordance with MIL-DTL-642.

Terminal screws: Shall be .086-64 UNF-2A in accordance with MIL-DTL-642/12.

One cable clamp, as shown on figure 2, shall be supplied with each plug.

Part or Identifying Number (PIN): M642/5-1.

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Referenced documents. In addition to MIL-DTL-642, this document references the following:

MIL-DTL-642/12
FED-STD-H28
ASTM-A109/109M
ASTM-B633
SAE-AMS-QQ-P-416

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force – 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5935-2026-042)

Review activities:
Army - AR, CR4, MI
Navy - AS, MC, OS, SH

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:08Z
Check the source to verify that this is the current version before use.