NOT MEASUREMENT SENSITIVE


MIL-B-3476/39
31 August 1990

MILITARY SPECIFICATION SHEET

BRASSARD, CRIMINAL INVESTIGATIONS DIVISION SPECIAL AGENT, ARMY, SUBDUED AND DESERT

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-B-3476.

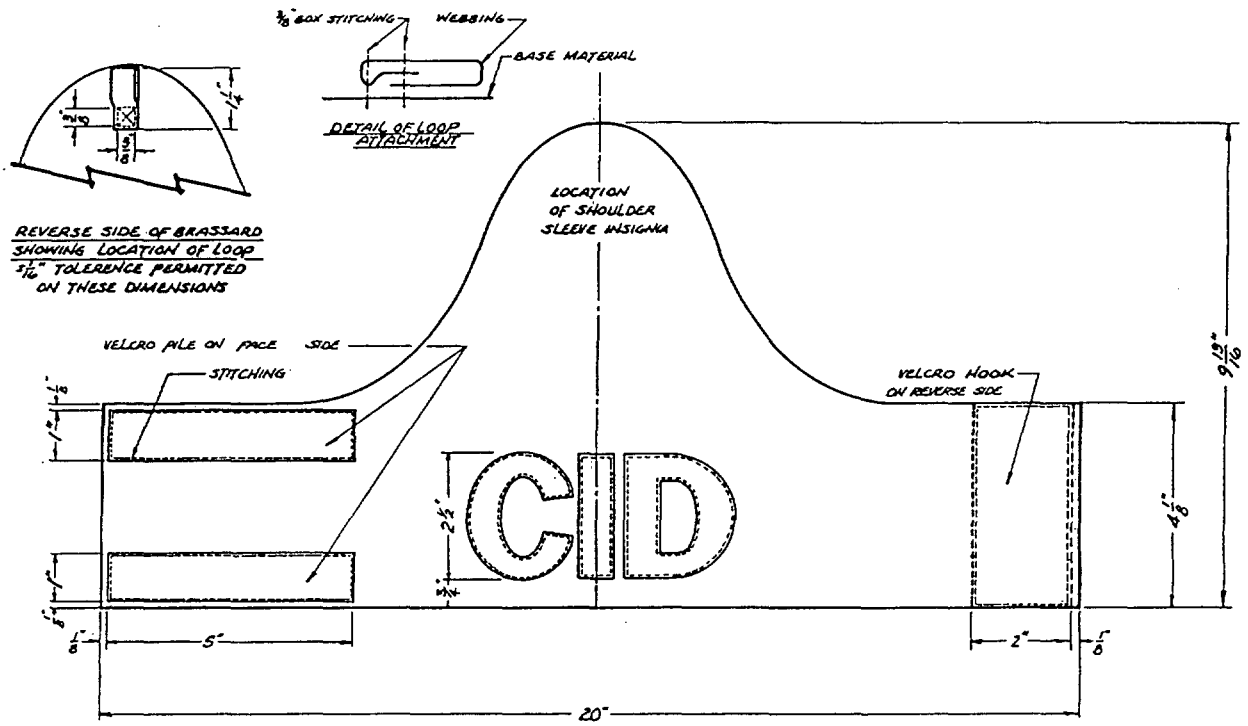

MATERIAL:
BASE: Cloth, Nylon Duck, 7.25 oz per square yard
LETTERING: 100 percent cotton, 12.3 oz per square yard

COLOR (Subdued):
BASE: Olive Green
LETTERING: Black
THREAD (Overedge and Loop): Olive Green
THREAD (Applique): Black

COLOR (DESERT):
BASE: Khaki
LETTERING: Spice Brown
THREAD (Overedge and Loop): Khaki
THREAD (Applique): Space Brown

CONSTRUCTION DETAILS:
1. Cloth, nylon base shall conform to MIL-C-7219. The base cloth for the letters shall be a plain weave.
2. Lettering shall be appliqued to the base in position shown and applique thread shall be 50/3 soft cotton. The stitch type shall be type 304 with a 1/8 inch (0.32 cm) throw and 24-30 stitches per inch. The applique stitch shall completely cover the edge of the lettering.

AMSC N/A FSC 8455
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:03Z
Check the source to verify that this is the current version before use.

3. The loop shall be located on the vertical centerline of the brassard with the base 1-1/4 inches ± 1/16 inch (3.18 cm ± 0.16 cm) below the top edge of the brassard and shall be attached to the back of the brassard as shown. A bartack may be used to secure the loop in lieu of box stitching at the option of the manufacturer. However, the ends of the tape must be secured and completely covered by the stitching. The thread for stitching the loop shall conform to type 1CZ, 3 Ply, Ticket No. A of V-T-276.
4. Velcro fastener (pile and loop) shall be olive green for the subdued brassard and khaki for the desert brassard and shall conform to Type II, Class I of MIL-F-21840 and shall be positioned as shown. Velcro shall be secured to the base fabric using Stitch Type 301 with 12 stitches per inch.
5. The brassard shall have an overedge stitching superimposed around the complete border. The overedge stitching shall conform to Stitch Type 504 or 505 with 24 stitches per inch. The cover thread shall completely cover the cut edges of the brassard.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-A546)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:03Z
Check the source to verify that this is the current version before use.