NOT MEASUREMENT SENSITIVE


MIL-B-3476/39A
10 May 1991
SUPERSEDING
MIL-B-3476/39
31 August 1990

MILITARY SPECIFICATION SHEET

BRASSARD; CRIMINAL INVESTIGATIONS DIVISION SPECIAL AGENT, ARMY
SUBDUED AND DESERT

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-B-3476.

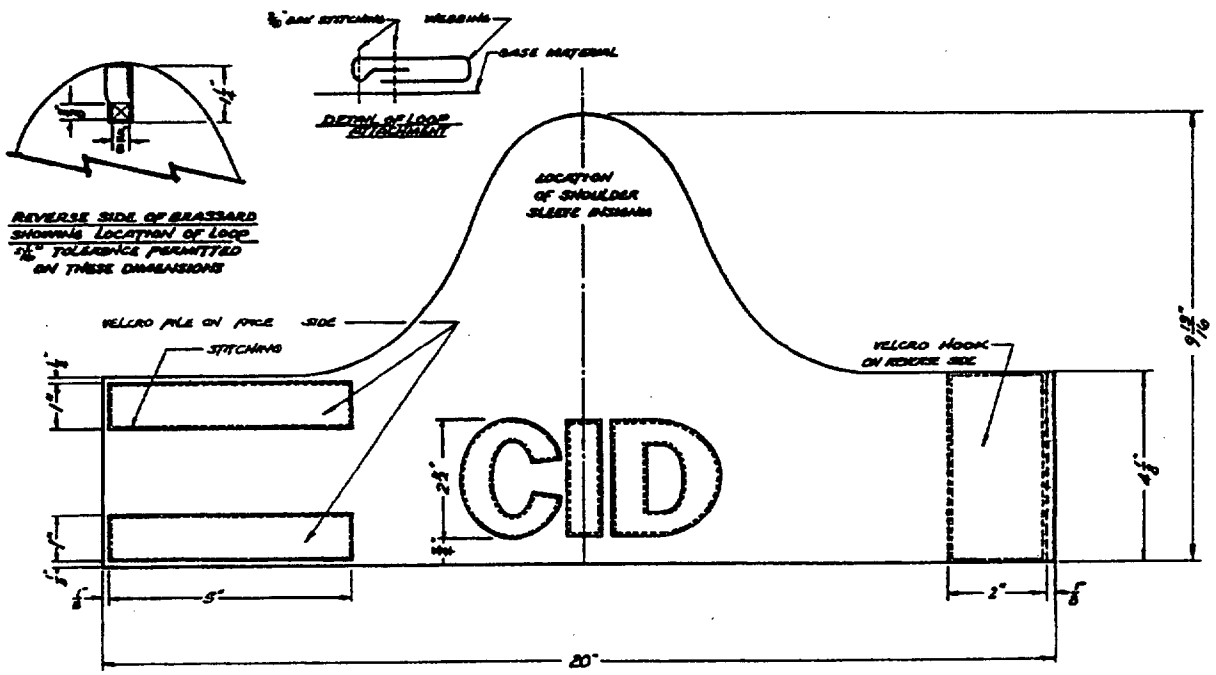

MATERIAL:
BASE: Cloth, Nylon Duck, 7.25 oz per square yard
LETTERING: 100 percent cotton, 12.3 oz per square yard

COLOR (Subdued):
BASE: Olive green (Shade 106)
LETTERING: Black (Cable No. 65018)
THREAD (Overedge and loop): Olive green (Cable No. 67134)
THREAD (Applique): Black (Cable No. 67138)

COLOR (Desert):
BASE: Khaki (Cable No. 80162)
LETTERING: Spice brown (Cable No. 67196)
THREAD (Overedge and Loop): Khaki (67193)
THREAD (Applique): Spice brown (Cable No. 67196)

AMSC N/A FSC 8455
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:02Z
Check the source to verify that this is the current version before use.

CONSTRUCTION DETAILS:

1. The cloth for the letters shall be a plain weave.
2. Lettering shall be appliqued to the base in the position shown. The applique thread shall be 50/3 ply soft cotton and use Stitch Type 304 with a 1/8 inch throw with 24-30 stitches per inch. The applique stitch shall completely cover the edge of the lettering.
3. The loop shall be located on the vertical centerline of the brassard with the base 1-1/4 inches ± 1/16 inch below the top edge of the brassard and shall be attached to the back of the brassard as shown. A bartack may be used to secure the loop in lieu of box stitching at the option of the manufacturer. However, the ends of the tape must be secured and completely covered by the stitching. The thread for stitching the loop shall conform to Type IC2, 3 Ply, Ticket No. A of V-T-276.
4. The attaching device shall be hook and pile, olive green (shade 106) and conform to Type II, Class 1 of MIL-F-21840. The hook and pile fastener shall be positioned and secured to the base fabric as shown using Stitch Type 301 with 12 stitches per inch.
5. Overedge stitching shall be superimposed around the complete border of the brassard. The stitching shall conform to Stitch Type 504 or 505 with 24 stitches per inch. The cover thread shall completely cover the cut edges of the brassard.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-0119)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:02Z
Check the source to verify that this is the current version before use.