NOT MEASUREMENT SENSITIVE

MIL-DTL-3476/39B
20 August 1997
SUPERSEDING
MIL-B-3476/39A
10 May 1991

DETAIL SPECIFICATION SHEET

BRASSARD, CRIMINAL INVESTIGATIONS DIVISION
SPECIAL AGENT, ARMY, SUBDUED AND DESERT

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-3476 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

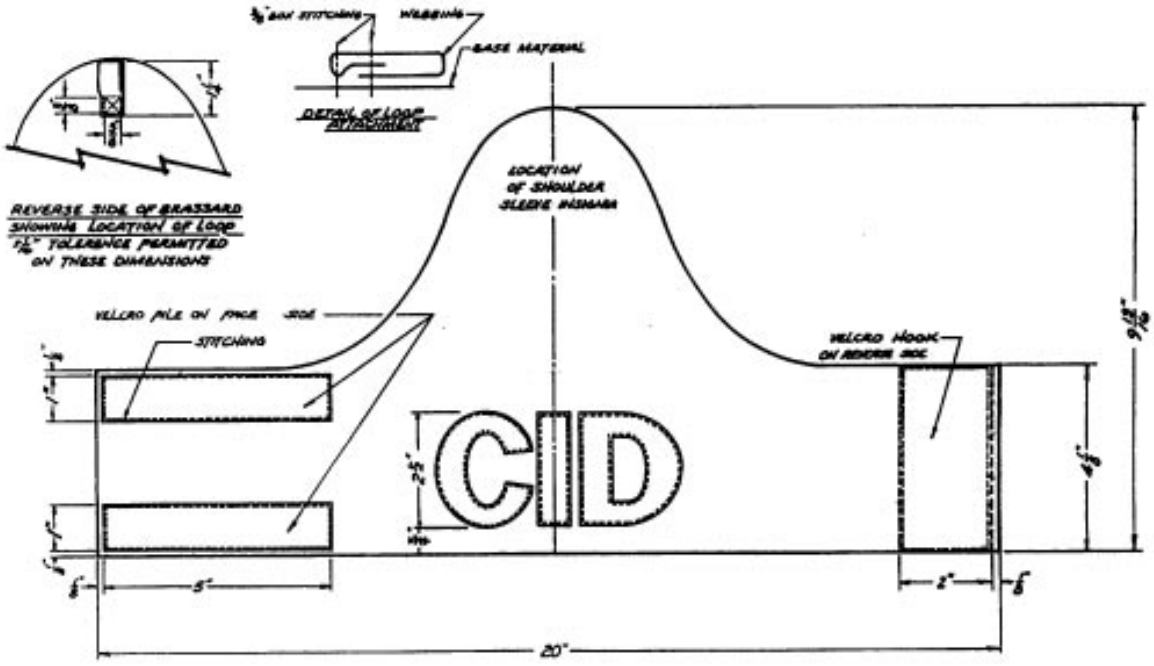

MATERIAL:
BASE: Nylon Duck
LETTERING: Cotton 12.3 oz. per square yard
LOOP: Cotton Tape

AMSC N/A FSC 8455
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:02Z
Check the source to verify that this is the current version before use.

COLOR (Subdued):
BASE: Olive Green (Shade 106)
LETTERING: Black (Cable 65018)
THREAD (Overedge and Loop): Olive Green (Cable No. HAJ 67134)
Thread (Appliqué): Black (Cable No. HAN 67138)

COLOR (Desert):
BASE: Khaki (Cable No. 80162)
LETTERING: Spice Brown (Cable No. HCV 67196)
THREAD (Overedge and Loop): Khaki (Cable No. HCS 67193)
Thread (Appliqué): Spice Brown (Cable No. HCV 67196)

CONSTRUCTION DETAILS:

1. The cloth for the letters shall be a plain weave.

2. Lettering shall be appliquéd to the base in the position shown (see TIOH Drawing Number B-8-65). The appliqué thread shall be 50/3 ply soft cotton and use Stitch Type 304 with a 1/8 inch (0.32 cm) throw and 24-30 stitches per inch. The appliqué stitch shall completely cover the edge of the lettering.

3. The loop shall be located on the vertical center line of the brassard with the base 1-1/4 inches ± 1/16 inch (3.18 cm + 0.16 cm) below the top edge of the brassard and shall be attached to the back of the brassard as shown. A bar tack may be used to secure the loop in lieu of box stitching at the option of the manufacturer. However, the ends of the tape must be secured and completely covered by the stitching. The thread for stitching the loop shall conform to Type 1C2, 3 Ply, Ticket No. A of A-A-52094.

4. The attaching device shall be hook and pile, Olive Green (Shade 106) and shall conform to Type II, Class I of MIL-F-21840. The hook and pile fastener shall be positioned and secured to the base fabric as shown using Stitch Type 301 with 12 stitches per inch.

5. Overedge stitching shall superimposed around the complete border of the brassard. The stitching shall conform to Stitch Type 504 or 505 with 24 stitches per inch. The cover thread shall completely cover the cut edges of the brassard.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-0839)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:02Z
Check the source to verify that this is the current version before use.