NOT MEASUREMENT SENSITIVE

MIL-DTL-3476/42B
20 April 1998
SUPERSEDING
MIL-DTL-3476/42A
20 August 1997

DETAIL SPECIFICATION SHEET

BRASSARD, MILITARY POLICE IN GARRISON, MARINE CORPS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-3476 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

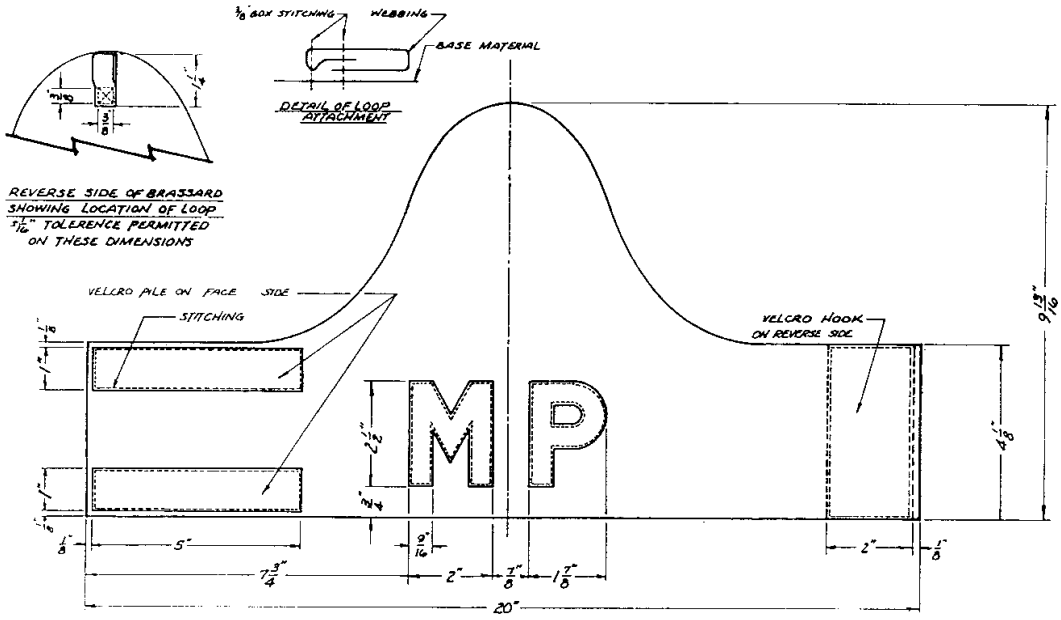

MATERIAL:
BASE: Cloth, Wool, 14 to 15-1/2 oz per square yard
LETTERING: 100 percent cotton, 12.3 oz per square yard
LOOP: Cotton Tape

COLOR:
BASE: Scarlet (Shade 2501)
LETTERING: Gold (Cable No. 65021)
THREAD (Overedge and loop): Scarlet (Cable No. 67154)
THREAD (Appliqué): Old Gold (Cable No. 67105)

AMSC N/A FSC 8455
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:04Z
Check the source to verify that this is the current version before use.

CONSTRUCTION DETAILS:

1. The base cloth for the letters shall conform with Type I of MIL-C-29405.

2. Lettering shall be appliquéd to the base in the position shown. The appliqué thread shall be 50/3 ply soft cotton and use Stitch Type 304 of FED-STD-751 with a 1/8 inch (0.32 cm) throw with 24-30 stitches per inch. The appliqué stitch shall completely cover the edge of the lettering.

3. The loop shall be located on the vertical center line of the brassard with the base 1-1/4 inches (3.18 cm) ± 1/16 inch (0.16 cm) below the top edge of the brassard and shall be attached to the back of the brassard as shown. A bar tack may be used to secure the loop in lieu of box stitching at the option of the manufacturer. However, the ends of the tape must be secured and completely covered by the stitching. The thread for stitching the loop shall conform to Type III, 3 Ply, Ticket No. A of A-A-52094.

4. The attaching device shall be hook and pile, Red (Shade 3852) and conform to Type II, Class 1 of MIL-F-21840. The hook and pile fastener shall be positioned and secured to the base fabric as shown using Stitch Type 301 with 12 stitches per inch.

5. Overedge stitching shall be superimposed around the complete border of the brassard. The stitching shall conform to Stitch Type 504 or 505 of FED-STD-171 with 24 stitches per inch. The cover thread shall completely cover the cut edges of the brassard.

Custodian:
Army - IH
Navy - NU

Preparing activity:
Army - IH

Review activity:
Navy - MC
DLA - CT

(Project No. 8455-0936)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:04Z
Check the source to verify that this is the current version before use.