INCH-POUND


MIL-DTL-3476/42C
28 April 2014
SUPERSEDING
MIL-DTL-3476/42B
20 April 1998

DETAIL SPECIFICATION SHEET

BRASSARD, MILITARY POLICE IN GARRISON, U.S. MARINE CORPS

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-3476.

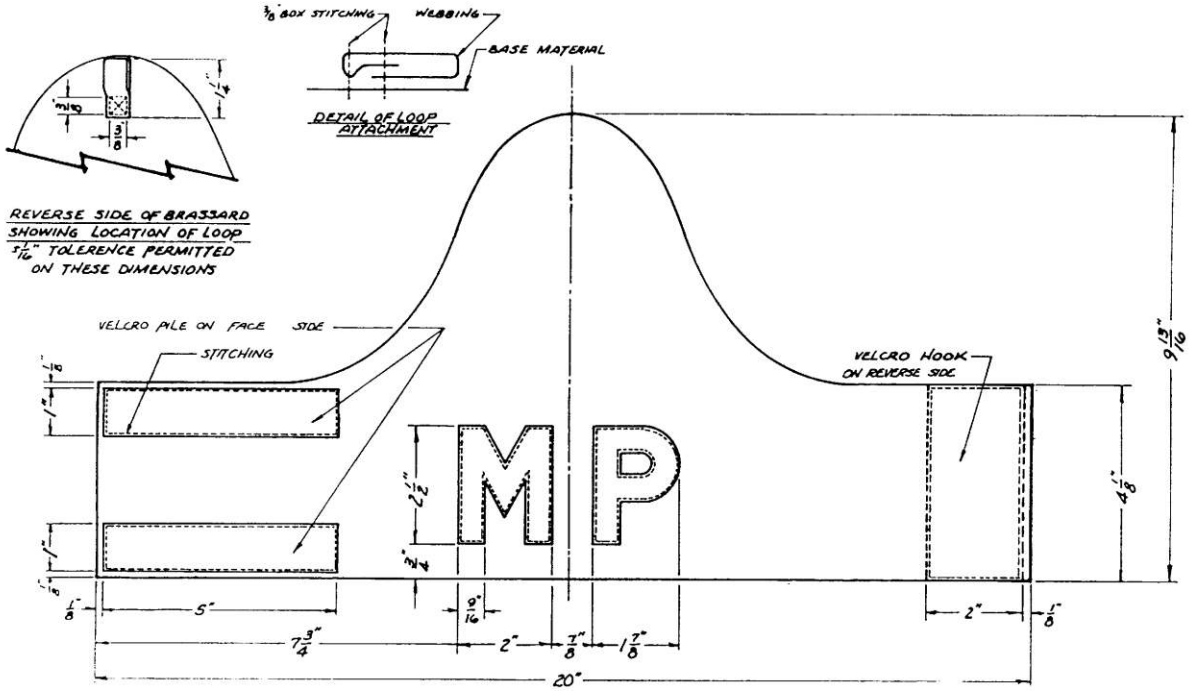

MATERIAL:
BASE: Cloth, Wool, 14 to 15-1/2 oz per square yard
LETTERING: 100 percent Cotton, 12.3 oz per square yard
LOOP: Cotton Tape

COLOR:
BASE: Scarlet (Shade 2501)
LETTERING: Old Gold (Cable No. HE 67105)
THREAD (Overedge and LOOP): Marine Corps Scarlet (Cable No. HBD 67154)
THREAD (Applique'): Old Gold (Cable No. HE 67105)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:03Z
Check the source to verify that this is the current version before use.

CONSTRUCTION DETAILS:

1. The base cloth for the letters shall conform with Type I of MIL-C-29405.

2. Lettering shall be appliquéd to the base in the position shown. The appliqué thread shall be 50/3 ply soft cotton and use Stitch Type 304 of ASTM-D-6193 with a 1/8 inch throw with 24-30 stitches per inch. The appliqué stitch shall completely cover the edge of the lettering.

3. The loop shall be located on the vertical center line of the brassard with the base 1-1/4 inches ± 1/16 inch below the top edge of the brassard and shall be attached to the back of the brassard as shown. A bar tack may be used to secure the loop in lieu of box stitching at the option of the manufacturer. However, the ends of the tape must be secured and completely covered by the stitching. The thread for stitching the loop shall conform to Type III, 3 Ply, Ticket No. A of A-A-52094

4. The attaching device shall be hook and pile, Red (Shade 3852) and conform to Type II, Class 1 of A-A-55126. The hook and pile fastener shall be positioned and secured to the base fabric as shown using Stitch Type 301 with 12 stitches per inch.

5 Overedge stitching shall be superimposed around the complete border of the brassard. The stitching shall conform to Stitch Type 504 or 505 of ASTM-D-6193 with 24 stitches per inch. The cover thread shall completely cover the cut edges of the brassard.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - IH
Navy - MC

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2014-095)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:03Z
Check the source to verify that this is the current version before use.