NOT MEASUREMENT SENSITIVE

MIL-DTL-3476/43
20 August 1997

DETAIL SPECIFICATION SHEET

BRASSARD, PERSONNEL ASSISTANCE POINTS,
TOTAL ARMY PERSONNEL COMMAND

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-3476 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

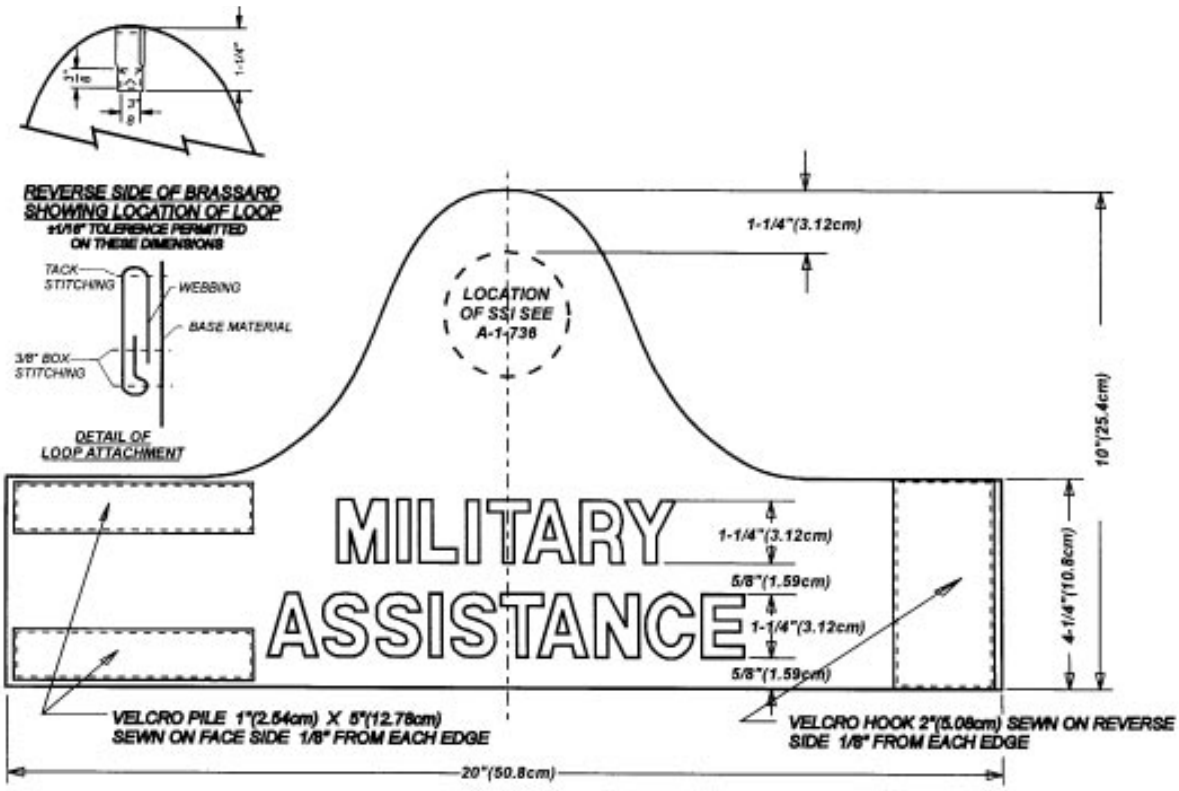

MATERIAL:
BASE: Wool Broadcloth or Facing Cloth
LETTERING: Embroidered

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:04Z
Check the source to verify that this is the current version before use.

COLORS:
BASE: Black (Shade 65018)
LETTERING: White (Shade 67101)
THREAD (Hem and Loop): Black (Cable No. HAN 67138)

CONSTRUCTION DETAILS:

1. Lettering shall be embroidered to the base in the position shown (see TIOH Drawing Number B-8-67).

2. The brassard shall have a 3/8 inch hem on all sides. Hemming shall be accomplished using Stitch Type EFa-1 with 12 stitches to the inch.

3. Thread for hemming shall conform to Type IC2, 3 Ply, Ticket No. A of A-A-52094. The color of the thread for hemming shall be Black conforming to Cable No. HAN 67138.

4. Base and letters shall be cut from a single ply of the material specified.

5. The loop shall be located on the vertical center line of the brassard with the base 1-1/4 inches ± 1/16 inch (3.18 cm ± 0.04 cm) below the top edge of the brassard and shall be attached to the back of the brassard as shown. A bar tack may be used to secure the loop in lieu of box stitching at the option of the manufacturer. However, the ends of the tape must be secured and completely covered by the stitching. The thread for stitching the loop shall conform to Type IC2, 3 Ply, Ticket No. A of A-A-52094.

7. The attaching device shall be hook and pile, Black (Shade 65018) and conform to Type II, Class 1 of MIL-F-21840. The hook and pile fastener shall be positioned and secured to the base fabric as shown using Stitch Type 301 with 12 stitches per inch.

Custodian:
Army - IH
Air Force -45

Preparing activity:
Army - IH

Review activity:
Air Force 32, 82, 99
DLA - CT

(Project No. 8455-0840)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:04Z
Check the source to verify that this is the current version before use.