MILITARY SPECIFICATION SHEET

CHASSIS, TRAILER, SIZE 4, CCE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the size 4 trailer chassis described herein shall consist of this document and the latest issue of specification MIL-C-52437.

REQUIREMENTS:

1. The trailer chassis is intended for towing by light and medium trucks and off-road equipment.
2. When the chassis overall width (special option) shall be limited to 80-inches, the chassis shall be intended for towing by light trucks up to 11,000 lb. GVWR class (see FED-STD-292 and 307). These trucks shall have capability for electric brakes and surge brakes; however, no compressed air is available for straight or air-over-hydraulic brakes.
3. The trailer chassis characteristics shall be in accordance with table I and as shown in figure 1.

TABLE I. Size 4 chassis.

GVWR per DOT	Minimum	4000 – lb.
Payload capacity	Minimum	2800 – lb.
Trailer curb weight	Maximum	1500 – lb.
Tow eye weight	Range	5 to 15 – Percent
OAL	Maximum	190 – in.
OAH	Minimum	Practical
OAW	Maximum	96 – in.
Opt OAW when spec.		
(See 6.2, App. A, T-1)	Maximum	80 – in.
Drawbar length	Minimum	60 – in.
Suspension travel, single axle	Minimum	4 – in.
Suspension travel, multi-axle	Minimum	8 – in.
Running gear, standard		
No. of axles		1 – ea.
- GAWR, ea. axle at hubs	Minimum	5000 – lb.
- No. trailer tires		2 – ea.
No. spare tires		1 – ea.
Tire size		7.50 R 16
Load range		LR D (8 PR)
Tire inf. press.	Maximum	60 – psi

FSC 2330

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:18Z
Check the source to verify that this is the current version before use.

TABLE I. Size 4 chassis. (Cont'd)

Running gear options		
Option A:		
No. of axles		1 – ea.
- GAWR, ea. axle at hubs	Minimum	5000 – lb.
- No. trailer tires		2 – ea.
No. spare tires		1 – ea.
Tire size		12-16.5
Load range		LR E (10 PR)
Tire inf. press	Maximum	35 psi
Option B:		
No. of axles		2 – ea.
- GAWR, ea. axle at hubs	Minimum	5000 – lb.
- No. trailer tires		4 – ea.
No. spare tires		1 – ea.
Tire size		12-16.5
Load range		LR E (10 PR)
Tire inf. press.	Maximum	35 – psi.
Bed length, A,	Minimum	120 – in.
Bed width, B &.C	Minimum	48 – in.
Bed height, D	Maximum	30 – in.
Top of fender height, E	Maximum	50 – in.
Fender length, F:		
Single axle	Maximum	50 – in.
Tandem axle	Maximum	108 – in.

Custodians:
Army - ME
Air Force - 99

Preparing Activity:
Army - ME

Review activity:
Army - AT

Project 2330-0786-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:18Z
Check the source to verify that this is the current version before use.

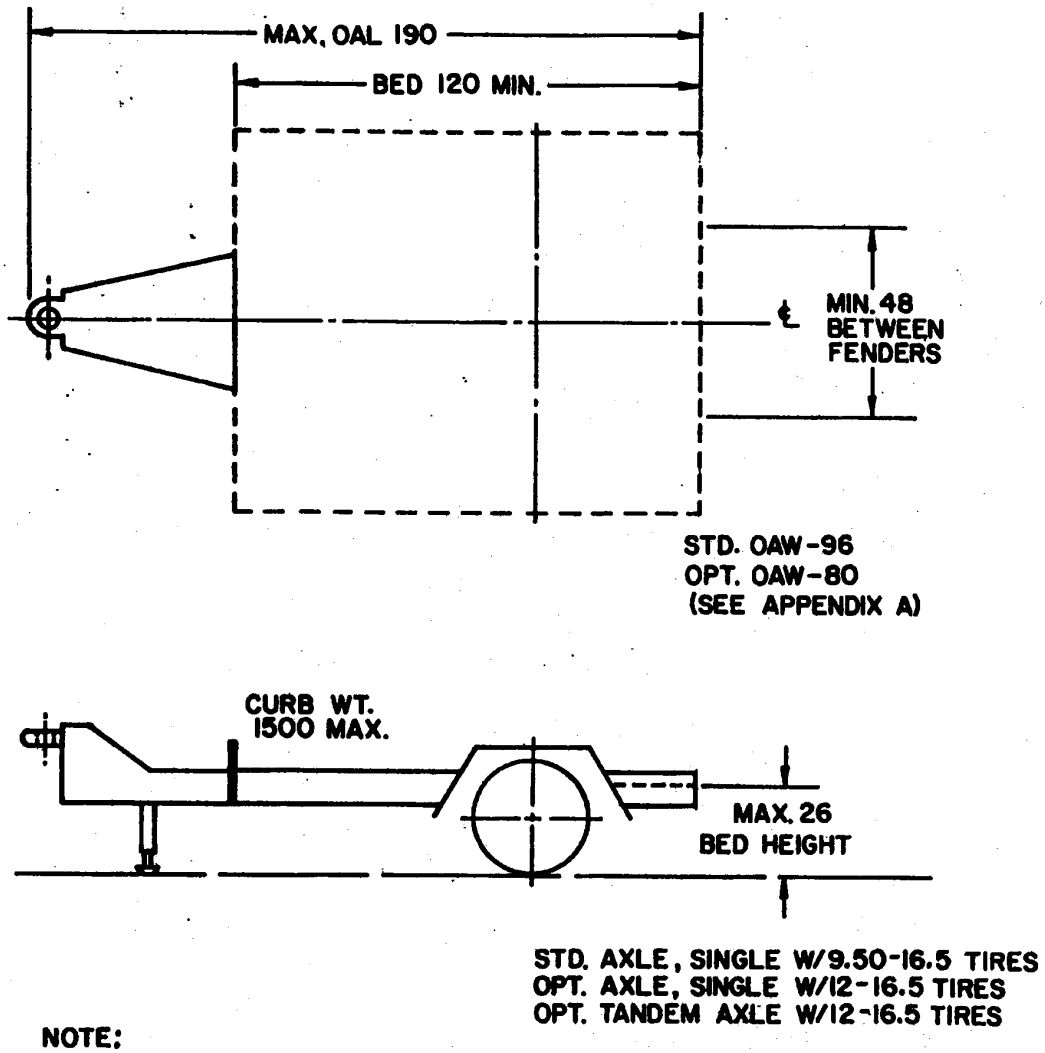

FIGURE 1. CCE size 4 trailer chassis, min. 4000 GVWR.

X-4062

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:18Z
Check the source to verify that this is the current version before use.