MILITARY SPECIFICATION SHEET

CHASSIS, TRAILER, SIZE 32, CCE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the size 32 trailer chassis described herein shall consist of this document and the latest issue of specification MIL-C-52437.

REQUIREMENTS:

1. The trailer chassis shall be intended for towing by heavy trucks and off-road equipment.
2. The trailer chassis and platform characteristics shall be in accordance with table I, table II, and as shown in figure 1.

TABLE I. Size 32 Chassis with platform.

GVWR per DOT	Minimum	32,000 – lb.
Payload capacity	Minimum	23,000 – lb.
Trailer curb weight	Maximum	8,800 – lb.
Tow eye weight	Range	5 to1 – Percent
OAL	Maximum	330 – in.
OAH	Minimum	Practical
OAW	Maximum	96 – in.
Drawbar length	Minimum	72 – in.
Suspension travel, mech. susp.	Minimum	6 – in.
air ride	Minimum	8 – in.
Running gear, standard		
No. of axles		2 – ea.
- GAWR, ea. axle at hubs	Minimum	19,000 – lb.
- No. trailer tires		8 – ea.
No. spare tires		1 – ea.
Tire size		l0.00 – 15. TR
Load range		LR F (8 PR)
Tire inf. press.	Maximum	80 – psi
Running gear options		
Option A:		
No. of axles		3 – ea.
- GAWR, ea. axle at hubs	Minimum	17,000 – lb.

FSC 2330

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:18Z
Check the source to verify that this is the current version before use.

TABLE I. Size 32 chassis with platform. (Cont'd)

- No. trailer tires	12 – ea.
No. spare tires	1 – ea.
Tire size	8.25 – 15 TR
Load-range	
Tire inf. press.	
Option B:	
No. of axles	as specified
- GAWR, ea. axle at hubs	
- No. trailer tires	
No. spare tires	
Tire size	
Load range	
Tire inf. press.	
Bed length, A	Minimum 228 – in.
Bed width, B & C	Minimum 96 – in.
Bed height, D & E	Maximum 40 – in.
(Wheels under platform)	

3. The trailer shall be equipped with a flat platform deck as specified in table II. While the trailer shall be compatible for mounting skid based equipment, because of the size of this trailer, no skid base crossmembers nor drain openings shall be required

TABLE II. Trailer platform deck.

a. Platform	Size of platform per table I. Provide structure of full width crossmembers integrally welded to frame rails and platform frame. Replaceable, weather-resistant-treated, wood plank flooring having minimum 2-inch nominal thickness. Wood decking minimum 1/4-in. above framing. All decking secured with plated recessed bolts and nuts, clamping undrilled framing members by using bridge clips. Wheel covers of minimum 5/16 inch thick, flat nonskid pattern, steel plates. Platform equipped with 6 – ea. stake pockets, accept 4-inch square standard timber stakes. Provide stake pockets flush with top of platform and partially closed, at the bottom, sufficiently to both hold the stakes and permit drainage of rain.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:18Z
Check the source to verify that this is the current version before use.

TABLE II. Trailer platform deck.. (Cont'd)

b. Skid Plate	Rear underside of platform equipped with an aluminum or steel skid plate to reduce ground skidding resistance across ditches and off-road terrain. Provide plate minimum 94 inches wide and 36 inches forward from rear crossmember.

Custodians:
Army - ME
Air Force - 99

Preparing Activity:
Army - ME

Review activity:
Army - AT

Project 2330-0786-9

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:18Z
Check the source to verify that this is the current version before use.

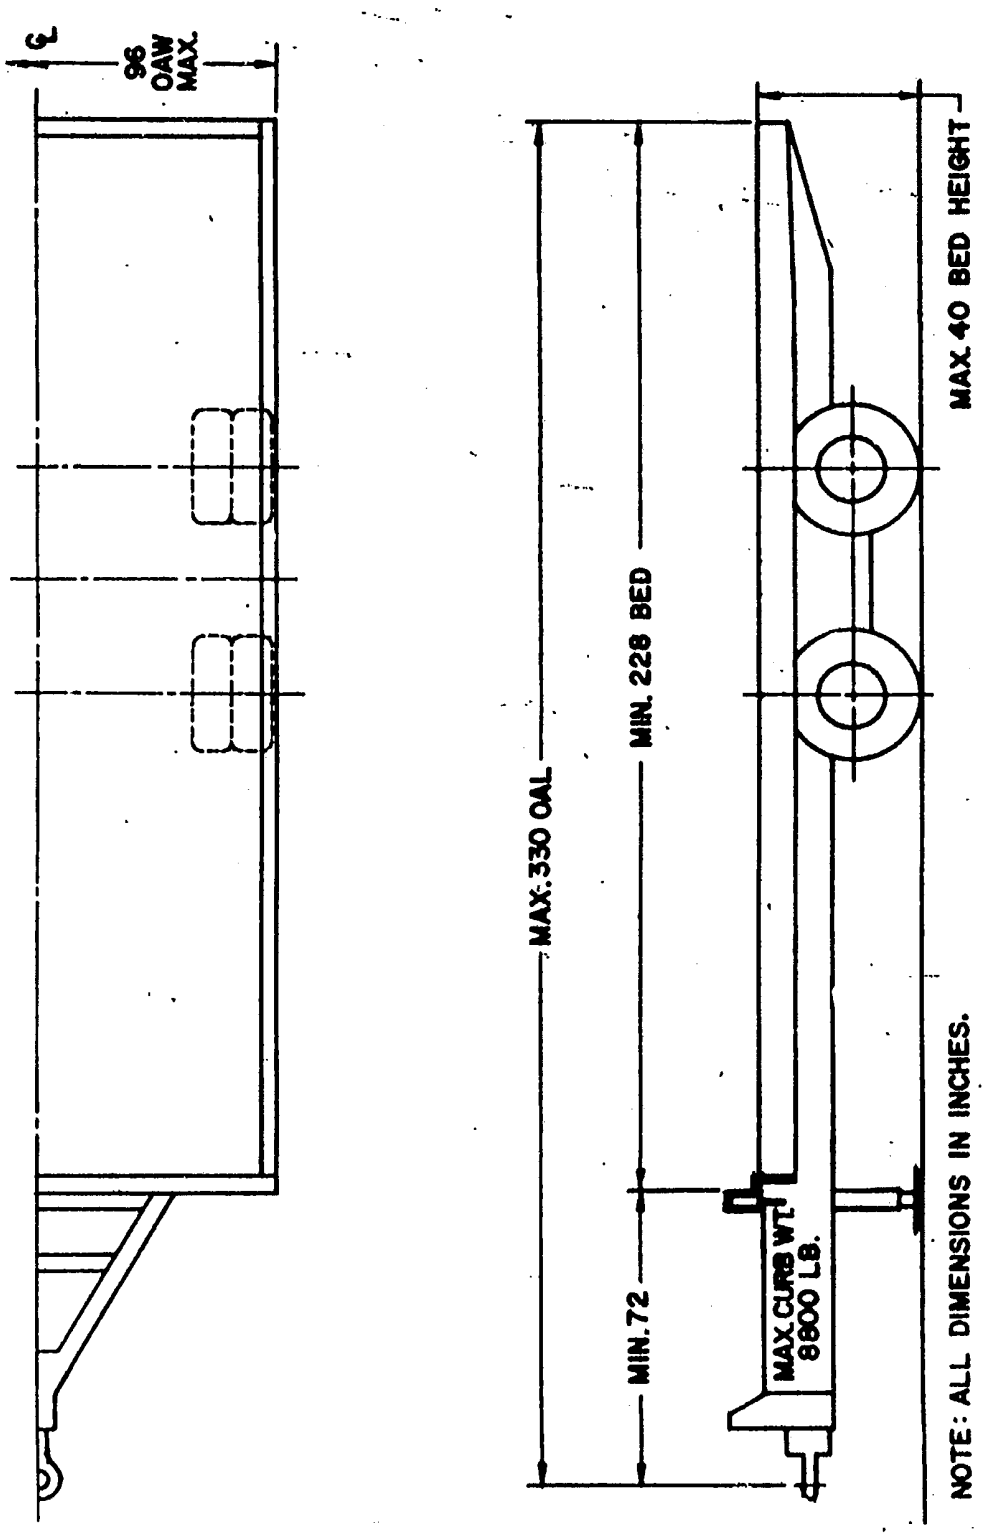

FIGURE 1. CCE size 32 trailer chassis w/platform, min. 32000 lbs. GVWR.

X-4067

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:18Z
Check the source to verify that this is the current version before use.