METRIC

MIL-PRF-49384B(CR)
19 MAY 1997
SUPERSEDING
MIL-I-49384A(CR)
11 JUNE 1982

PERFORMANCE SPECIFICATION
OPTICAL IMAGER, SU-121/UA

This performance specification is approved for use by USACECOM, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This performance specification covers one type of common module, Optical Imager, SU-121/UA.

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation (see 6.2). Handbooks are for guidance only and therefore are not mandatory.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: HQ, USA Communications-Electronics Command, ATTN: AMSEL-LC-LEO-E-EP, Fort Monmouth, NJ 07703 by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 5855

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:04Z
Check the source to verify that this is the current version before use.

HANDBOOKS

DEPARTMENT OF DEFENSE

MIL-HDBK-454	- Standard General Requirements for Electronic Equipment
MIL-HDBK-742	- Disposal Method of Packaging Material

(Unless otherwise indicated, copies of the above specifications, standards, and handbooks are available from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

2.2.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

DRAWINGS

US ARMY COMMUNICATIONS-ELECTRONICS COMMAND

SM-D-657725	- Optical Imager
SM-D-657741	- Infrared Imager, Large, Outline Dimensions

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.3 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DoDISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DoDISS are the issues of the documents cited in the solicitation (see 6.2).

AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)

ANSI PH 3.35-1977	- Method of Designating and Measuring Focal Lengths and Distances of Photographic Lenses.
ANSI PH 3.29-1979	- Method of Designating and Measuring Apertures and Related Quantities Pertaining to Photographic Objectives and Projection Lenses.

(Application for copies should be addressed to American National Standards Institute, Inc. 1430 Broadway, NY, NY 10018)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:04Z
Check the source to verify that this is the current version before use.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM E 122-89 - Sample Size to Estimate a Measure of Quality for a Lot or Process.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103-1187.)

2.4 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. When specified, a sample shall be subjected to first article inspection in accordance with the contract or purchase order (see 4.2).

3.2 Materials. The contractor shall select the materials, but the materials used shall be fully capable of meeting all of the operational and environmental requirements specified herein. The materials specified in the applicable drawings are recommended, but are not mandatory. Selection criteria of the class, grade or type part shall be that the material will be able to perform its intended function when it is assembled. Verification of the supplier meeting the overall performance requirements shall be the governing acceptance standard. Recovered materials shall be used to the maximum extent possible.

3.3 Description. The Optical Imager, SU-121/UA, referred to herein as the “Imager”, consists of thermally compensated optical elements which focus the IR energy from a mechanical scanner onto the detector array of an infrared system.

3.3.1 Design. The Imager shall meet the form, fit, function in accordance with SM-D-657725 and interface requirements specified herein.

3.3.2 Dimensions. The Imager shall meet the dimensions and dimensional tolerances of Drawing SM-D-657741 to ensure that items built IAW with this specification properly interface with existing hardware.

3.3.3 Weight. The weight of the Imager shall be 0.522 kg or less when weighed by a scale having an accuracy of 99% or better.

3.4 Components. The Imager shall consist of optical elements, a flat mirror and a housing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:04Z
Check the source to verify that this is the current version before use.

3.5 Performance characteristics.

3.5.1 Effective Focal Length (EFL). The EFL of the Imager in the 7.6 to 11.75 micrometer spectral region shall be 67.9, ±0.7 millimeters at the nominal flange focal distance (see 3.5.6). Perform 4.5.1 for acceptance.

3.5.2 f/number. The f/number of the Imager shall be f/1.19 or faster, set by the clear aperture of the first lens element (see Figure 3). Perform 4.5.2 for acceptance.

3.5.3 Linear distortion. The geometric (linear) distortion of the Imager shall be between 0 to -3 percent at the edge of the field. Perform 4.5.3 for acceptance.

3.5.4 Modulation transfer function (MTF). The MTF of the Imager shall be not less than the MTF given in Figures 1 and 2, as measured in a flat-field focal plane and parallel to surface A in Figure 3. Perform 4.5.4 for acceptance.

3.5.5 Relative illumination (RI). The RI of the Imager shall not be less than 60 percent at the edge of the field, for a field diameter of 20 millimeters at the image plane. Perform 4.5.5 for acceptance.

3.5.6 Flange focal distance (FD). The FD shall be set to a nominal of 17.71mm, adjustable ± 0.47mm at ambient temperature (see 6.3.2). Perform 4.5.6 for acceptance.

3.5.7 Field of view (FOV). The Imager shall have a FOV sufficient to fill a circular format with a diameter of 20 mm as measured as part of the relative illumination requirement of 3.5.5. Perform 4.5.7 for acceptance.

3.5.8 Optical transmittance. The optical transmittance of the Imager, measured in the 7.6 - 11.75 micrometer spectral region shall be at least 85% at ambient temperature (see 6.3.2). Perform 4.5.8 for acceptance.

3.5.9 Deviation. The optical axis of the Imager shall not deviate from 90° by more than ± 0.5°. Perform 4.5.9 for acceptance.

3.6 Environmental conditions.

3.6.1 Temperature shock. The Imager shall not be damaged (6.3.1) by sudden changes in temperature between -54°C and +71°C (See 4.6.1).

3.6.2 High temperature. The Imager shall not be damaged by storage to +95°C or operation to +71°C (See 4.6.2).

3.6.3 Low temperature. The Imager shall not be damaged by operation to -54°C or storage to -62°C (See 4.6.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:04Z
Check the source to verify that this is the current version before use.

3.6.4 Shock. The Imager shall not be damaged by high intensity shocks of 100 g's peak amplitude with 11 milliseconds duration duration and by bench handling (See 4.6.4).

3.6.5 Vibration. The Imager shall not be damaged after sustaining vibration over a frequency spectrum at the specified "g" levels and amplitudes shown in Figure 3 (See 4.6.5).

3.6.6 Altitude. The Imager shall not be damaged by operation at altitudes up to 10,000 feet above sea level or storage to 50,000 feet above sea level (See 4.6.6).

3.7 Treatment and painting. Unless otherwise specified, the Imager shall have an external surface of a composition or surface treatment which will prevent rust, corrosion, and fungus growth in the full range of environmental requirements. External color and surface shine shall reduce light reflection and reduce recognition. Adherence must be assured through the full range of environmental and use factors.

3.8 Nameplates and product marking. The Imager shall be marked for identification. MIL-HDBK-454 may be used for guidance in marking..

3.9 Workmanship. All optical parts shall be free of material defects such as bubbles, seeds, cracks, feathers, milkiness and other imperfections. Manufacturing defects such as blisters, burns, chips, dirt and other like defects shall be cause for rejection of the component or final assembly.

4. VERIFICATION

4.1 Classification of inspections. Inspections shall be classified as follows:

a. First article inspection (see 4.2).

b. Conformance inspection (see 4.3).

4.2 First article inspection. First article inspection shall be performed by the contractor on a number of samples specified in the contract or purchase order, when a first article sample is required (see 3.1). This inspection shall include the examination of 4.4 and the tests of 4.2.1 and 4.2.2.

4.2.1 Visual examination. All materials, parts, and assemblies shall be examined for conformance to the applicable specification or drawing as indicated. Inspections shall be made using ASTM E 122-89 sampling procedures.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:04Z
Check the source to verify that this is the current version before use.

TABLE I. Visual inspections.

Inspection	Requirement paragraph	Verification paragraph
Any as specified part or component missing or damaged	3.4, 6.4.1	4.2.1
Weight not as specified	3.3.3	4.2.1
Marking not as specified	3.8	4.2.1
Workmanship not as specified	3.9	4.2.1
Treatment and painting not as specified	3.7	4.2.1
Dimensions not as specified	3.3.2	4.2.1
Flange diameter	3.3.1	4.2.1
Flange mounting hole pattern	3.3.1	4.2.1

4.2.2 Tests. Upon successful completion of inspections specified in 4.2.1, perform the tests in Table II in any order. Failure to meet any performance requirement shall constitute first article failure.

TABLE II. First article inspection.

Inspection	Requirement paragraph	Test paragraph
Effective focal length	3.5.1	4.5.1
f/number	3.5.2	4.5.2
Linear distortion	3.5.3	4.5.3
Modulation transfer function	3.5.4	4.5.4
Relative illumination	3.5.5	4.5.5
Flange focal distance	3.5.6	4.5.6
Field of view	3.5.7	4.5.7
Optical transmittance	3.5.8	4.5.8
Deviation	3.5.9	4.5.9
Temperature shock	3.6.1	4.6.1
High temperature	3.6.2	4.6.2
Low temperature	3.6.3	4.6.3
Shock	3.6.4	4.6.4
Vibration	3.6.5	4.6.5
Altitude	3.6.6	4.6.6

4.2.3 Disposition of first article samples. First article samples shall not be considered as part of the procurement quantities (see 6.2).

4.3 Conformance inspection.

4.3.1 Inspection. Inspection shall be as specified in 4.2.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:04Z
Check the source to verify that this is the current version before use.

4.3.2 Group Inspections.

4.3.2.1 Group A inspection. Group A inspection shall be conducted at ambient temperature (see 6.4.1) on all Imagers following the inspection of 4.3.1. Group A tests listed in Table III may be performed in any order. Failure of any requirement shall be cause for rejection of that unit.

TABLE III. Group A inspection.

Inspection	Requirement paragraph	Test paragraph
Modulation transfer function	3.5.4	4.5.4
Flange focal distance	3.5.6	4.5.6

4.3.2.2 Group B inspection. Not required.

4.3.2.3 Group C inspection. Group C inspection shall be conducted on Imagers selected from units which have passed the tests in 4.3.2.1. The sample(s) shall be tested in accordance with the inspections listed in Table IV. Samples shall be selected in accordance with 4.3.2.3.1. Group C tests listed in Table IV may be performed in any order.

4.3.2.3.1 Sampling for Group C inspection. Group C inspection samples shall be selected from monthly lots in accordance with ASTM E 122-89 and as specified in the contract (see 6.2.f).

TABLE IV. Group C inspection.

Inspection	Requirement paragraph	Test paragraph
Effective focal length	3.5.1	4.5.1
Relative illumination	3.5.5	4.5.5
Optical transmittance	3.5.8	4.5.8
Deviation	3.5.9	4.5.9
Temperature shock	3.6.1	4.6.1
Vibration	3.6.5	4.6.5

4.3.2.3.2 Group C failures. Actions required relative to group C failures shall be as specified in the contract (see 6.2).

4.3.2.3.3 Disposition of group C samples. Group C samples shall be accepted on contract subsequent to the tests of Table III.

4.4 Examination. Each Imager shall be examined for compliance with the requirements specified in 3.3 through 3.9. Any redesign or modification of the contractor's standard product to comply with specified requirements or any necessary redesign or modification following failure to meet the specified requirements shall receive particular attention for adequacy and suitability.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:04Z
Check the source to verify that this is the current version before use.

This element of inspection shall encompass all visual examinations and dimensional measurements. Noncompliance with any specified requirements or presence of one or more defects preventing or lessening maximum efficiency shall constitute cause for rejection.

4.5 Methods of inspection.

4.5.1 Effective Focal Length (EFL). EFL measurements are defined by ANSI PH 3.35, paragraph 4. Failure to meet the requirements of 3.5.1 shall constitute failure of this test.

4.5.2 f/number. f/number measurements are defined by ANSI PH 3.29, paragraph 2.6. Also, see paragraph 6.2.i for additional testing information pertaining to f/number. Failure to meet the requirements of 3.5.2 shall constitute failure of this test.

4.5.3 Linear distortion. Linear distortion is defined by Method 27 or 28 per the document noted in paragraph 6.2.i. Failure to meet the requirements of 3.5.3 shall constitute failure of this test.

4.5.4 Modular transfer function (MTF). The MTF of the Imager shall be measured using a test set calibrated to provide frequency and modules. The MTF shall be measured either continuously or in 10 discrete steps from 0 to 20 cycles per millimeter (cy/mm). The MTF test shall be run at infinite conjugates. On-axis MTF shall be measured in a single orientation and shall not be less than the MTF in figure 1. Off-axis radial MTF shall be measured in the same plane used for the on-axis image parallel to the plane defined by the flange surface A of figure 3. The off-axis MTF shall be measured at 2 points in the field 90 degrees apart. The MTF tests shall be performed using the nominal flange focal distance (see 3.6.6) using the aperture stop shown in figure 3. Failure to meet requirements of 3.6.4 shall constitute failure of this test.

4.5.5 Relative illumination (RI). Relative illumination shall be measured in accordance with Method 8 of the document noted in paragraph 6.2.i modified for the spectral region of interest. Relative illumination shall be measured in 2 mutually perpendicular planes with the first plane measured across the greatest distance of the oval shape of the mirror. Failure to meet requirements of 3.5.5 shall constitute failure of this test.

4.5.6 Flange focal distance (FD). Flange focal distance shall be measured from surface A in figure 2 to the flat-field plane of best MTF (see 3.6.4). Failure to meet requirements of 3.5.6 shall constitute failure of this test.

4.5.7 Field of view. The field of view of the Imager shall be measured as part of the relative illumination test given in 4.5.5. Failure to meet the requirements of 3.5.7 shall constitute failure of this test.

4.5.8 Optical transmittance. Optical transmission shall be measured in the 7.6- to 11.75-micrometer spectral region referenced in the document listed in 6.2.i. Failure to meet requirements of 3.5.8 shall constitute failure of this test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:04Z
Check the source to verify that this is the current version before use.

4.5.9 Deviation. The deviation shall be measured by determining the angle between the plane of flange surface A of figure 2 and the plane of best focus. The plane of best focus shall be determined by measuring the flange focal distance of four image points of 5 mm field height and 90 degrees apart. Best MTF at 10 cy/mm shall be used to determine the exact location of these points with respect to flange A. The deviation is a vector having components in the x and y directions. The deviation for a single component is determined by the arctangent of the difference in focal positions for opposite sides divided by the distance between the points. The deviation is then the square root of the sum of the squares of the individual components. Failure to meet the requirements of 3.5.9 shall constitute failure of this test.

4.6 Environmental tests. Environmental testing may be performed using the procedures identified in 6.4, or using a contractor developed alternative test plan following Government approval of that test plan. When the contractor's test plan deviates from the test procedures prescribed, the contractor shall be required to show where his own tests and methods for verifying the specified performance are equivalent. Also, measurements taken by the contractor during verification testing of all environmental requirements shall be accomplished using accepted testing apparatus, e.g. environmental test chamber, vibration test table, pendulum shock device or similar equipment for which the technical capabilities to properly simulate extreme climatic or environmental conditions are scientifically documented. The methods for testing to verify compliance with all stated performance characteristics selected by the contractor shall be equivalent or better than the recommended procedures specified herein.

4.6.1 Temperature shock. Measure compliance with the requirements of 3.6.1. Recommend performing the tests identified in 6.4. Failure to meet the requirement shall constitute failure of the sample.

4.6.2 High temperature. Measure compliance with the requirements of 3.6.2. Recommend performing the tests identified in 6.4. Failure to meet the requirement shall constitute failure of the sample.

4.6.3 Low temperature. Measure compliance with the requirements 3.6.3. Recommend performing the tests identified in 6.4. Failure to meet the requirement shall constitute failure of the sample.

4.6.4 Shock. Measure compliance with the requirements of 3.6.4. Recommend performing the tests identified in 6.4. Failure to meet the requirement shall constitute failure of the sample.

4.6.5 Vibration. Measure compliance with the requirements of 3.6.5. Recommend performing the tests identified in 6.4. Failure to meet the requirement shall constitute failure of the sample.

4.6.6 Altitude. Measure compliance with the requirements of 3.6.6. Recommend performing the tests identified in 6.4. Failure to meet the requirements shall constitute failure of the sample.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:04Z
Check the source to verify that this is the current version before use.

4.7 Reliability.

4.7.1 First article reliability. The lower test MTBF (θ_1) shall be demonstrated in accordance with the following subparagraphs.

4.7.1.1 Test level.

Test +50°C, (+5 - 0)°C

Temperature cycling - None

Vibration - 2.2 g's, ±10 percent peak acceleration value at any nonresonant frequency between 20 and 60 Hz measured at the mounting points of the equipment. The duration of vibration shall be at least 10 minutes during each hour of equipment operating time. The vibration shall be perpendicular to the plane of the printed circuit board.

Equipment on-off cycling - Turn on and let temperature stabilize, hold for 3 hours, then turn off and let temperature stabilize. This cycle shall continue throughout the test.

4.7.1.2 Parameters. The discrimination ratio θ_o/θ_1 shall be 3.

4.7.1.3 Failure criteria and test length. The tests of table III shall be performed at least once prior to and once after the tests of 4.7.1.1. Additional testing of table III may be selected by the contractor. The results of all table III tests and any physical damage shall be used to determine the success or failure of the reliability test. In the event of a Table III test failure, the time interval between the preceding successful test and the failure shall not contribute to the total cumulative hours. Testing shall continue until the total unit hours, together with the total count of relevant equipment failures, permit either an accept or reject decision. Only equipment "ON" time shall contribute to the total unit hours. No single equipment's "ON" time shall be less than one-half the average operating time of all equipment on test.

5. PACKAGING

5.1 Packaging and Marking. For acquisition purposes, the packaging and marking requirements shall be as specified in the contract or order (see 6.2). When actual packaging of materiel is to be performed by DoD personnel, these personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activity within the Military Department or Defense Agency, or within the Military Department's System Command. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity. Disposal methods per MIL-HDBK-742 is cited for guidance.

6. NOTES

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:04Z
Check the source to verify that this is the current version before use.

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory).

6.1 Intended use. The Imager is intended for use in infrared imaging systems.

6.2 Acquisition requirements. Procurement documents should specify the following:

a. Title, number, and date of this specification.

b. First article tests are required.

(1) Time frame for submission of first article test reports when first article tests are required.

(2) Time frame for approval of first article test reports when first article tests are required.

c. Production delivery schedule.

(1) Defined in terms of monthly lots.

(2) Actions required relative to Group C failures (see 4.3.2.3.2).

d. Environmental pollution prevention measures are to be considered in the disposal of packaging materials (see MIL-HDBK-742).

e. Address for delivery of first article samples.

f. Group C inspection monthly sample size to be established by the contracting office.

g. Packaging requirements (see 5.1).

h. Issue of DoDISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.2.1 and 2.2.2).

i. Recommended application of MIL-STD-150 for the acceptance criteria for the optical performance characteristics of Section 3.

6.3 Definitions.

6.3.1 Damage. Breakage, loosening, shifting, evidence of corrosion, or failure of any finish, hardware, connection or component, and any degradation of regular performance to values less than specified herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:04Z
Check the source to verify that this is the current version before use.

6.3.2 Ambient temperature. Ambient temperature is defined as 23 degrees centigrade.

6.4 Environmental inspection procedures. The test methods and procedures of MIL-STD-810, listed below, are recommended, but are not mandatory for determining compliance with the environmental requirements of this specification.

TABLE V. Environmental inspection procedures.

Inspection	Spec paragraph	MIL-STD-810 Method	MIL-STD-810 Procedure	Remarks
Temperature shock	3.6.1	503.1	I	Steps 1 & 4 shall be +71°C and Step 2 shall be -54°C. Transition form +71°C to -51°C and from -51°C to 71°C shall include a 2 hour stabilization period at +23°C.
High temperature	3.6.2	501.1	I	Storage temperature (Step 2) shall be +95°C and operation temperature shall be +71°C. Test shall be for 6 hours.
Low temperature	3.6.3	502	I	Storage temperature (Step 2) shall be -62°C for 9 hours. Step 4 for operation shall be -54°C for 9 hours.
Shock	3.6.4	516.2	II	Time duration is 11 milliseconds.
Vibration	3.6.5	514.2	VIII	Use Curve V. Use Method 201A of MIL-STD-202 as an alternative. (See Figure 3).
Altitude	3.6.6	500.1	I	Operator altitude chamber @ 10,000/ft above sea level for operation and 40,000 feet above sea level (Step 2) for 3 hours.

6.5 Subject term (key word) listing.

Detector array
Mechanical scanner
Infrared system

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:04Z
Check the source to verify that this is the current version before use.

6.6 Change from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

CUSTODIAN:
Army - CR

PREPARING ACTIVITY:
Army - CR

(Project 5855-0097)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:04Z
Check the source to verify that this is the current version before use.

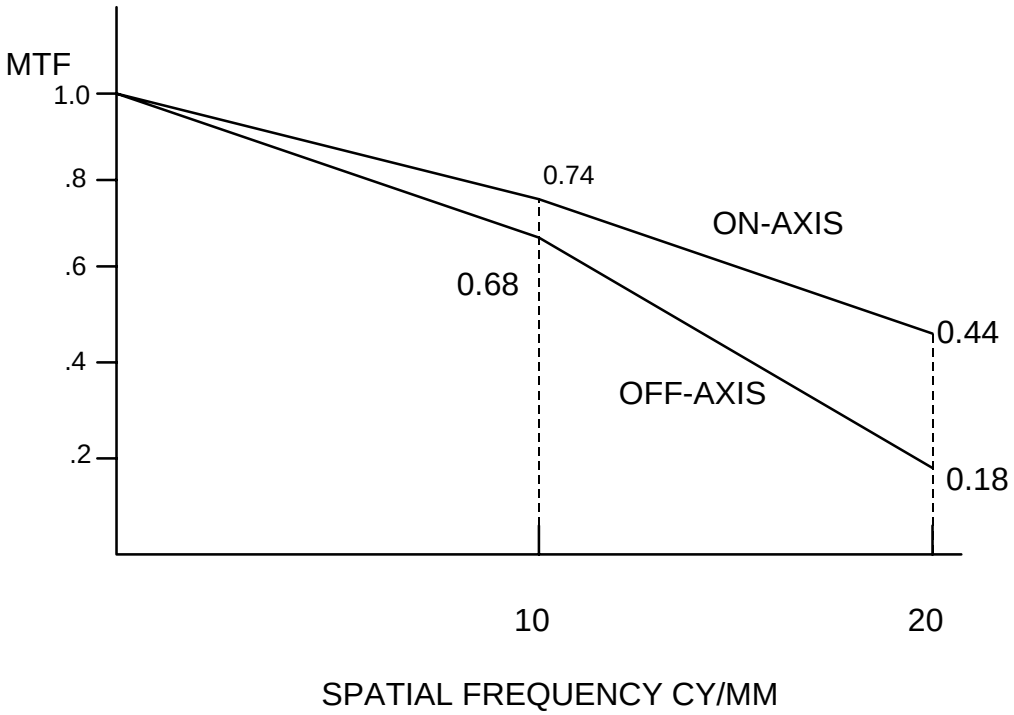


FIGURE 1. MTF Versus Spatial Frequency

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:04Z
Check the source to verify that this is the current version before use.

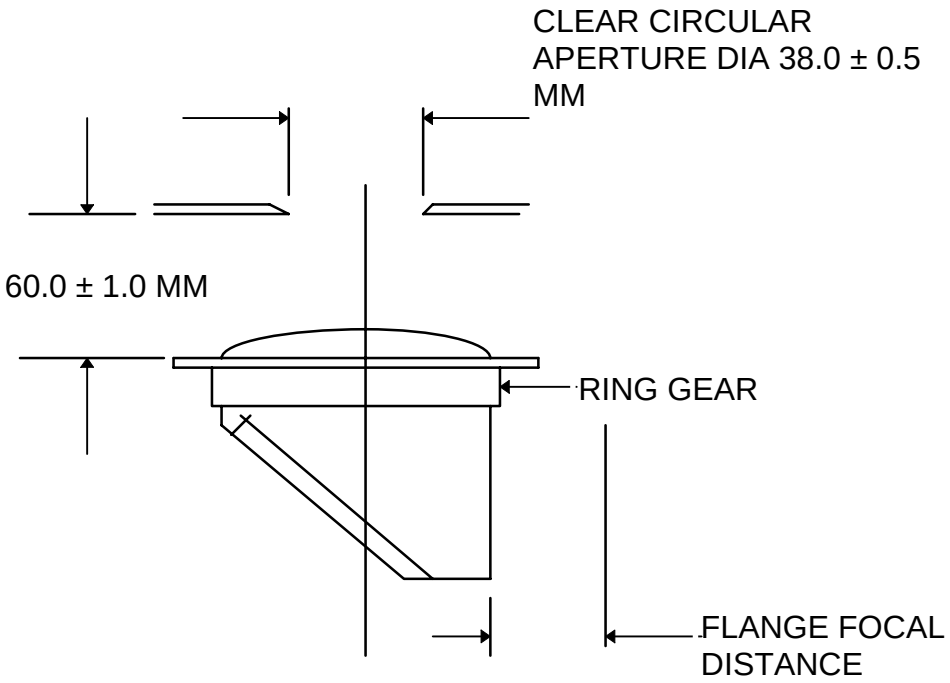


FIGURE 2. Imager Aperture Stop.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:04Z
Check the source to verify that this is the current version before use.

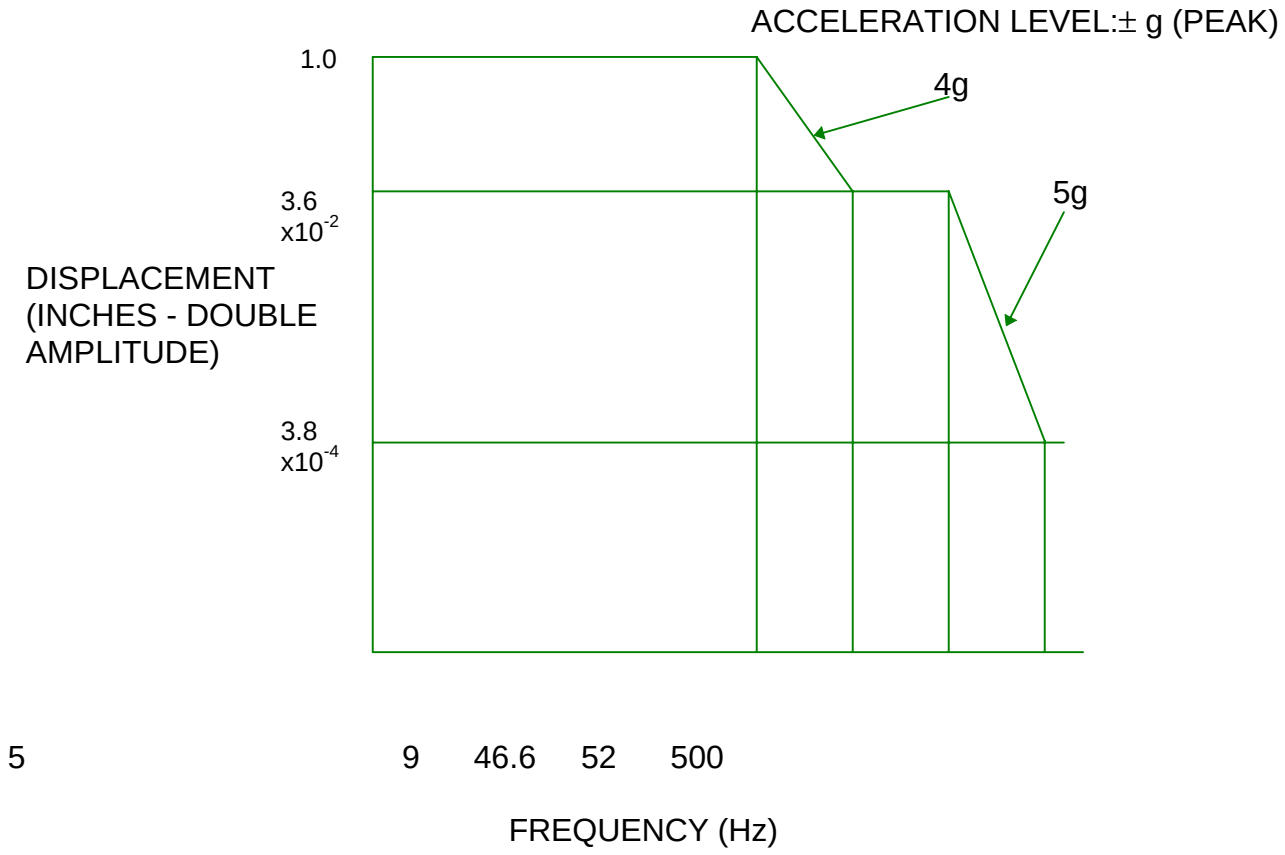


FIGURE 3. Vibration Inspection Profile.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:04Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.

2. The submitter of this form must complete blocks 4, 5, 6, and 7.

3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	**1. DOCUMENT NUMBER** MIL-PRF-49384B	**2. DOCUMENT DATE (YYMMDD)** 970519

3. DOCUMENT TITLE OPTICAL IMAGER, SU-121/UA

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME *(Last, First, Middle Initial)*	b. ORGANIZATION	
c. ADDRESS *(Include Zip Code)*	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON *(if applicable)*	**7. DATE SUBMITTED** (YYMMDD)

8. PREPARING ACTIVITY

a. NAME ROGER LOUISAIRE	b. TELEPHONE *Include Area Code)* (1) Commercial: (732) 532-2735 (2) AUTOVON: 992-2735
c. ADDRESS *(Include Zip Code)* US ARMY COMMUNICATIONS-ELECTRONICS COMMAND, ATTN: AMSEL-LC-LEO-E-EP FORT MONMOUTH, NJ 07703-5023	**IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT:** DEFENSE QUALITY AND STANDARDIZATION OFFICE 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22401-3466 Telephone (703) 756-2340 AUTOVON 289-2340

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:04Z
Check the source to verify that this is the current version before use.