NOT MEASUREMENT SENSITIVE


MIL-DTL-11484/108E
17 September 2020
SUPERSEDING
MIL-DTL-11484/108D
13 November 2015

DETAIL SPECIFICATION SHEET

LAPEL BUTTON, CIVILIAN EXECUTIVE RECOGNITION, U.S. NAVY

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-11484.

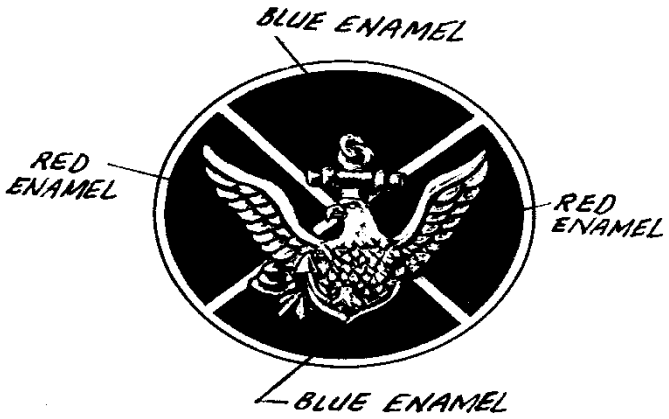

MATERIAL:
BASE: Gilding Metal 95/5 (UNS Alloy No. C-210)
Device: Red Brass 85/15 (UNS Alloy C-230)

FINISH:
BASE: Epoxy resin (Stoning epoxy) 24K Gold Plated, Mirror-like Polished and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 6.
DEVICE: 24K Gold Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 8.

DIMENSION:
BASE:
DIAMETER: 9/16 inch (REF)
THICKNESS (At edge): 0.055 inch $\pm$ 0.010 inch

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:44Z
Check the source to verify that this is the current version before use.

DEVICE:
HEIGHT (Overall): 11/32 inch (REF)
WIDTH (Overall): 7/16 inch (REF)
THICKNESS (At edge): 0.050 inch ± 0.005 inch

ATTACHING DEVICE:

1. The attaching device for -1 shall be prong with pick and flat ball type clutch or pin and catch as specified.

2. When a prong type attaching device is required, the prong shall be centered on the reverse side and fused or soldered to the lapel button.

3. When a pin type attaching device is required, the device shall be located on the vertical center line of the button with the catch on the bottom.

EPOXY: Epoxy resin shall be applied to the lapel button as indicated above, and shall match TIOH Hard Enamel Color Chip Numbers listed below. If hard cloisonné enamel is used, the base material must be Gilding Metal 95/5 (UNS Alloy No. C-210).

TIOH HARD ENAMEL COLOR CHIPS	
COLOR	**CHIP NUMBER**
Red	#1
Blue	#20

NOTES:

1. The term (REF) refers to the measurements taken from the obverse Government furnished hub or die.

2. The device shall be soft soldered to the base. When epoxy resin is used, the device shall be attached to the base by rivets.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - IH
Navy - NU

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2020-520)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:44Z
Check the source to verify that this is the current version before use.