NOT MEASUREMENT SENSITIVE


MIL-DTL-11484/108F(NU)
20 May 2026
SUPERSEDING
MIL-DTL-11484/108E(NU)
17 September 2020

DETAIL SPECIFICATION SHEET

LAPEL BUTTON, CIVILIAN EXECUTIVE RECOGNITION, U.S. NAVY

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-11484.

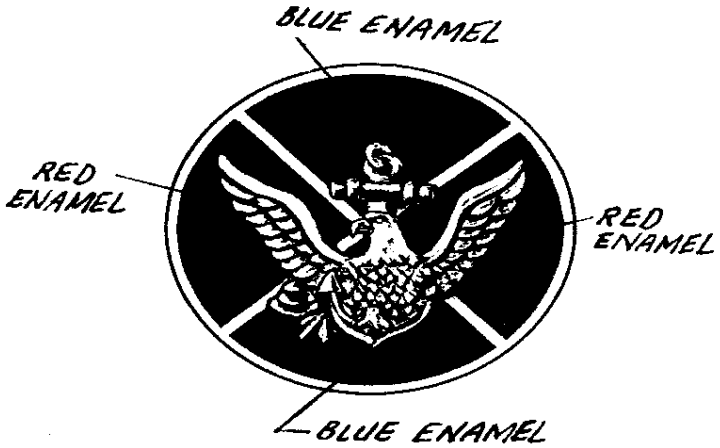

MATERIAL:
BASE: Gilding Metal 95/5 (UNS Alloy No. C-210)
Device: Red Brass 85/15 (UNS Alloy C-230)

FINISH:
BASE: Epoxy resin (Stoning epoxy) 24K Gold Plated, Mirror-like Polished and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 6.
DEVICE: 24K Gold Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 8.

DIMENSION:
BASE:
DIAMETER: 9/16 inch (REF)
THICKNESS (At edge): 0.055 inch ± 0.005 inch

AMSC N/A FSC 8455

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:44Z
Check the source to verify that this is the current version before use.

DEVICE:
HEIGHT (Overall): 11/32 inch (REF)
WIDTH (Overall): 7/16 inch (REF)
THICKNESS (At edge): 0.050 inch ± 0.005 inch

ATTACHING DEVICE:

1. The attaching device for -1 shall be prong with pick and wing type clutch or pin and catch as specified.

2. When a prong type attaching device is required, the prong shall be centered on the reverse side and fused or soldered to the lapel button.

3. When a pin type attaching device is required, the device shall be located on the vertical center line of the button with the catch on the bottom.

EPOXY: Epoxy resin shall be applied to the lapel button as indicated above, and shall match TIOH Hard Enamel Color Chip Numbers listed below. If hard cloisonné enamel is used, the base material must be Gilding Metal 95/5 (UNS Alloy No. C-210).

TIOH HARD ENAMEL COLOR CHIPS	
COLOR	**CHIP NUMBER**
Red	#1
Blue	#20

NOTES:

1. The term (REF) refers to the measurements taken from the obverse Government furnished hub or die.

2. The device shall be soft soldered to the base. When epoxy resin is used, the device shall be attached to the base by rivets.

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:44Z
Check the source to verify that this is the current version before use.

Custodian:
Navy - NU

Preparing activity:
Navy - NU

Review activity:
DLA - CT

(Project No. 8455-2026-308)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:44Z
Check the source to verify that this is the current version before use.