NOT MEASUREMENT SENSITIVE

MIL-DTL-11484/109C
27 September 1996
SUPERSEDING
MIL-L-11484/109B
14 January 1994

DETAIL SPECIFICATION SHEET

LAPEL BUTTON, LENGTH OF SERVICE (3, 15, 25, 30, 35, 40 and 50 YEARS), DEPARTMENT OF TRANSPORTATION

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-11484 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

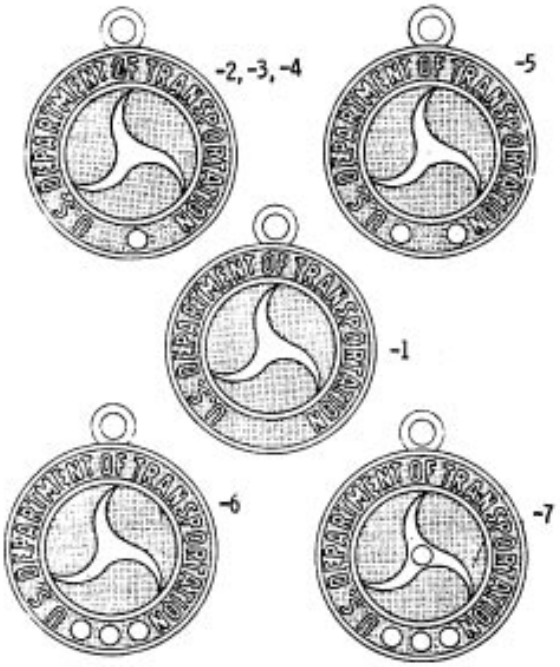

DASH NO.

-1: 3 Years with No Stone
-2: 15 Years with Emerald
-3: 25 Years with Ruby
-4: 30 Years with Diamond
-5: 35 Years with 2 Diamonds
-6: 40 Years with 3 Diamonds
-7: 50 Years with 4 Diamonds

MATERIAL: Red Brass

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:44Z
Check the source to verify that this is the current version before use.

FINISH: Gold Plated, Matte Finish, Polished Highlights and Edges and shall match TIOH Metal Finish Chip Number 8.

DIMENSIONS:
DIAMETER: 5/8 inch (1.59 cm) (REF)
THICKNESS (At Edge): 0.055 inch ± 0.005 inch (0.140 ± 0.012 cm)

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. The item shown can be manufactured as a lapel button, a charm, or a tie tack. The illustrations shown are for the charm type attaching device without the jump ring attached. The design of the lapel buttons and tie tacks are identical to the design illustrated except that the lug is removed.

3. Attaching device for the lapel button shall be prong with pick and flat ball type clutch. An alternate attaching device for the lapel button shall be a pin and catch. The attaching device for the tie tack shall be a prong with pick and ball type clutch with a chain and bar. The prong for the lapel button or tie tack shall be centered on the reverse side and fused or soldered to the lapel button 1/8 inch (0.32 cm) above the horizontal center line. The charm shall have a lug with jump ring. The attaching device shall be as specified by the contracting officer.

4. When a prong with pick is required for Dash No. -7, the prong shall be located on the vertical center line of the lapel button or tie tack as close as practical to the center without interfering with the placement of the stone.

5. Each lapel button, charm or tie tack shall be mounted and centered on a polyethylene pad and placed in a rigid hinged plastic box plastic box having a transparent lid and opaque bottom section. The box shall have two plastic hinges and catches and shall be approximately 1-1/8 inches (2.86 cm) square and 5/8 inch (1.59 cm) in overall depth. The pad shall be of sufficient depth to restrict movement of the lapel button, charm or tie tack when the lid is closed.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activities:
DLA - CT

(Project No. 8455-0858)

Civil Agency Coordinating Activity:
DOT

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:44Z
Check the source to verify that this is the current version before use.