NOT MEASUREMENT SENSITIVE


MIL-DTL-11484/109D
26 October 1998
SUPERSEDING
MIL-DTL-11484/109C
27 September 1996

DETAIL SPECIFICATION SHEET

# LAPEL BUTTON, LENGTH OF SERVICE (3, 15, 25, 30, 35, 40 and 50 YEARS), DEPARTMENT OF TRANSPORTATION

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-11484 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

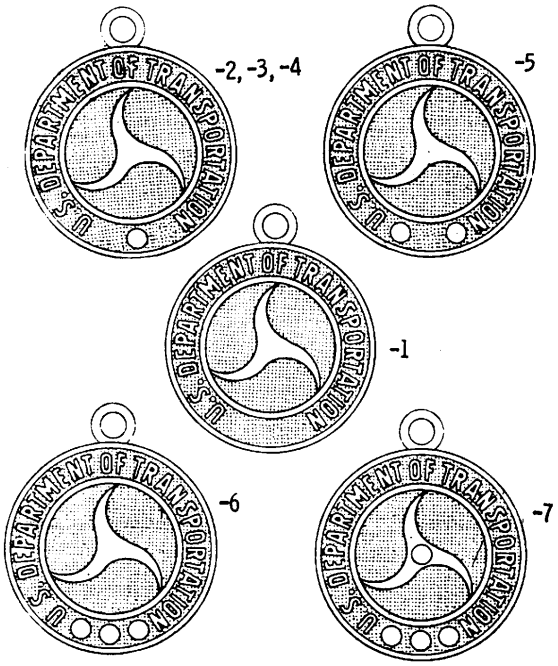


DASH NO.
-1: 3 Years with No Stone
-2: 15 Years with Emerald
-3: 25 Years with Ruby
-4: 30 Years with Diamond
-5: 35 Years with 2 Diamonds
-6: 40 Years with 3 Diamonds
-7: 50 Years with 4 Diamonds

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:44Z
Check the source to verify that this is the current version before use.

MATERIAL: Red Brass

FINISH: Gold Plated, Matte Finish, Polished Highlights and Edges and shall match TIOH Metal Finish Chip Number 8.

DIMENSIONS:
DIAMETER: 5/8 inch (1.59 cm) (REF)
THICKNESS (At Edge): 0.055 inch ± 0.005 inch (0.140 cm ± 0.012 cm)

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. The item shown can be manufactured as a lapel button, a charm, or a tie tack. The illustrations shown are for the charm type attaching device without the jump ring attached. The design of the lapel buttons and tie tacks are identical to the design illustrated except that the lug is removed.

3. The attaching device shall be one of the following types as specified by the contracting officer:

a. Prong with pick and flat ball type clutch. The prong shall be centered on the reverse side and fused or soldered to the lapel button. The prong for Dash No. -7 shall be located on the vertical center line of the lapel button as close as practical to the center without interfering with the placement of the stone.

b. Integral lug with jump ring (charm). The integral lug shall have a 1/8 inch ± 1/64 inch (0.318 cm ± 0.04 cm) outside diameter with a 1/16 inch ± 1/64 inch (0.159 cm ± 0.04 cm) diameter hole centered inside the lug. The lug shall be cut into the working die. Each charm shall have a jump ring formed from 0.035 inch ± 0.005 inch (0.089 cm ± 0.013 cm) diameter brass wire mounted through the lug. The outside diameter of the jump ring shall be 1/4 inch ± 1/64 inch (0.635 cm ± 0.04 cm). The ends of the wire shall be either straight or bias cut and shall be aligned and together. The jump ring shall be gold plated with a matte finish and shall match TIOH metal finish chip number 8.

c. Pin and catch type. The pin stem, hinge, and catch shall be as shown on drawing B-13-5 and be fabricated from nickel silver specified in 3.5.1. The pin stem shall be 7/16 inch ± 1/32 inch (1.111 cm ± 0.079 cm) in length. The pin stem shall be located on the vertical center line with the hinge and catch fused or soldered on the vertical center line equidistant from the center. The catch shall be located at the bottom of the lapel button. The point of the pin stem shall extend not less than 1/32 inch (0.079 cm) beyond the rotor of the catch but shall not extend more than 1/32 inch (0.079 cm) beyond the catch.

d. Prong with pick and ball type clutch with chain and T-bar (tie tack). The attaching device shall be prong with pick and ball type clutch with chain and T-bar similar to B.A. Ballou Type 14. The prong with pick shall be fabricated from nickel silver specified in 3.5.1. The clutch, chain, and T-bar shall be made from any type brass. The prong with pick shall 7/16 inch ± 1/64 inch (1.111 cm ± 0.04 cm) in length. The prong shall be centered on the reverse side and fused or soldered to the reverse side of the lapel button. The prong for


Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:44Z
Check the source to verify that this is the current version before use.

Dash -7 shall be located on the vertical center line of the lapel button as close as practical to the center without interfering with the placement of the stone.

4. Each lapel button, charm, or tie tack shall be mounted and centered on a polyethylene pad and placed in a rigid hinged plastic box plastic box having a transparent lid and opaque bottom section. The box shall have two plastic hinges and catches and shall be approximately 1-1/8 inches (2.86 cm) square and 5/8 inch (1.59 cm) in overall depth. The pad shall be of sufficient depth to restrict movement of the lapel button, charm, or tie tack when the lid is closed.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activities:
DLA - CT

(Project No. 8455-0959)

Civil Agency Coordinating Activity:
DOT


Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:44Z
Check the source to verify that this is the current version before use.