NOT MEASUREMENT SENSITIVE


MIL-DTL-11484/109F
14 July 2020
SUPERSEDING
MIL-DTL-11484/109E
14 September 2015

DETAIL SPECIFICATION SHEET

LAPEL BUTTON, LENGTH OF SERVICE (3, 15, 25, 30, 35, 40 AND 50 YEARS)
DEPARTMENT OF TRANSPORTATION

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-11484.

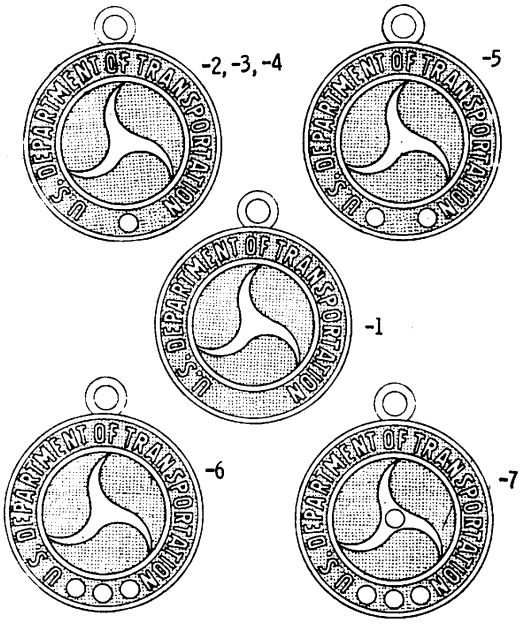

DASH NO.
-1: 3 Years with No Stone
-2: 15 Years with Emerald
-3: 20 Years with Ruby
-4: 30 Years with Diamond
-5: 35 Years with 2 Diamonds
-6: 40 Years with 3 Diamonds
-7: 50 Years with 4 Diamonds

AMSC N/A FSC 8455

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:44Z
Check the source to verify that this is the current version before use.

MATERIAL: (-1 thru -7) Red Brass 85/15 (UNS Alloy No. C-230)

FINISH: (-1 thru -7) 24K Gold Plated, Matte Finish, Polished highlights and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 8.

DIMENSION:
DIAMETER: 5/8 inch (REF)
THICKNESS (At edge): 0.055 inch ± 0.005 inch

ATTACHING DEVICE:
The attaching device shall be one of the following types as specified by the contracting officer:

A: Prong with pick and flat ball type clutch. The prong shall be centered on the reverse side and fused or soldered to the lapel button. The prong for -7 shall be located on the vertical center line of the lapel button as close as practical to the center without interfering with the placement of the stone.

B: Integral lug with jump ring (charm). The integral lug shall have a 1/8 inch ± 1/64 inch outside diameter with a 1/16 inch ± 1/64 inch diameter hole centered inside the lug. The lug shall be cut into the working die. Each charm shall have a jump ring formed from 0.035 inch ± 0.005 inch diameter brass wire mounted through the lug. The outside diameter of the jump ring shall be 1/4 inch ± 1/64 inch. The ends of the wire shall be either straight or bias cut and shall be aligned and together. The jump ring shall be gold plated with a matte finish and shall match TIOH metal finish chip number 8.

C: Pin and catch type. The pin stem, hinge, and catch shall be as shown on drawing B-13-5 and be fabricated from nickel silver specified in 3.5.1. The pin stem shall be 7/16 inch ± 1/32 inch in length. The pin stem shall be located on the vertical center line with the hinge and catch fused or soldered on the vertical center line equidistant from the center. The catch shall be located at the bottom of the lapel button. The point of the pin stem shall extend not less than 1/32 inch beyond the rotor of the catch but shall not extend more than 1/32 inch (0.079 cm) beyond the catch.

D: Prong with pick and ball type clutch with chain and T-bar (tie tack). The attaching device shall be prong with pick and ball type clutch with chain and T-bar similar to B.A. Ballou Type 14. The prong with pick shall be fabricated from nickel silver specified in 3.5.1. The clutch, chain, and T-bar shall be made from any type brass. The prong with pick shall 7/16 inch ± 1/64 inch (1.111 cm ± 0.04 cm) in length. The prong shall be centered on the reverse side and fused or soldered to the reverse side of the lapel button. The prong for -7 shall be located on the vertical center line of the lapel button as close as practical to the center without interfering with the placement of the stone.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:44Z
Check the source to verify that this is the current version before use.

NOTES:

1. The term (REF) refers to the measurements taken from the obverse Government furnished hub or die.

2. The item shown can be manufactured as a lapel button, a charm, or a tie tack. The illustrations shown are for the charm type attaching device without the jump ring attached. The design of the lapel buttons and tie tacks are identical to the design illustrated except that the lug is removed.

3. Each lapel button, charm, or tie tack well be mounted and centered on a polyethylene pad and placed in a rigid hinged plastic box plastic box having a transparent lid and opaque bottom section. The box shall have two plastic hinges and catches and well be approximately 1-1/8 inches square and 5/8 inch in overall depth. The pad well be of sufficient depth to restrict movement of the lapel button, charm, or tie tack when the lid is closed.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2020-410)

Civil Agency:
DOT

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:44Z
Check the source to verify that this is the current version before use.