MILITARY SPECIFICATION SHEET

LAPEL BUTTON, CIVILIAN AIDE, SECRETARY OF THE ARMY

This specification is approved for use by all Departments and Agencies of the Department of Defense. The complete requirements for procuring the item(s) described herein shall consist of this document and the issue in effect of Specification MIL-L-11484.

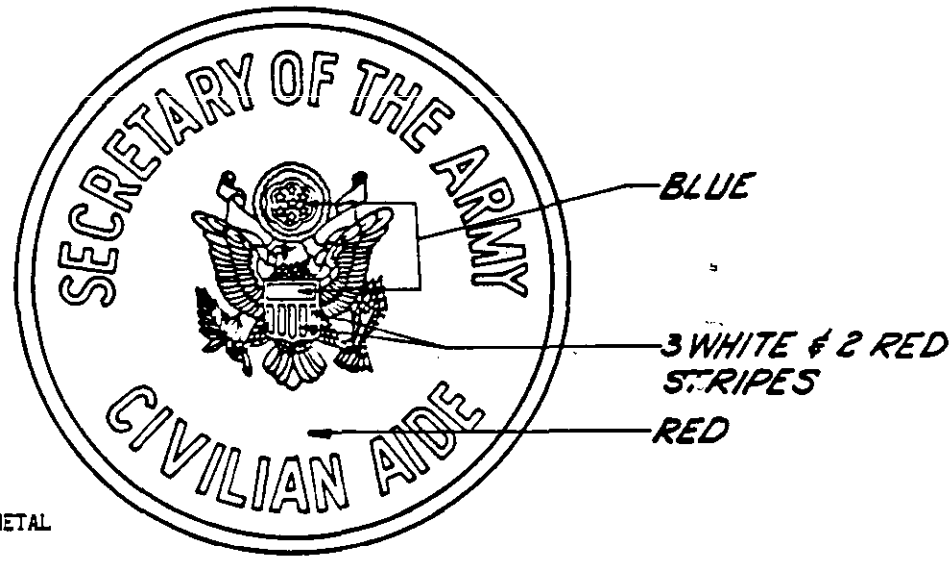

MATERIAL: GILDING METAL

DIMENSIONS (INCHES):
- BASE:
  - DIAMETER: 5/8 (REF)
  - THICKNESS: .060 ± .005
- DEVICE:
  - HEIGHT (OVERALL): 11/32 (REF)
  - WIDTH (OVERALL): 5/16 (REF)
  - THICKNESS: .045 (REF)

THICKNESS ASSEMBLED (THICKEST POINT): .100, +.010, -.000

FINISH:
- BASE: ENAMELED, GOLD PLATED WITH FACE AND EDGES POLISHED
- DEVICE: ENAMELED, GOLD PLATED, SATIN FINISH WITH POLISHED HIGHLIGHTS

FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:45Z
Check the source to verify that this is the current version before use.

NOTES:

1. ENAMEL AREAS SHALL BE AS INDICATED. ENAMEL SHALL MATCH THE ENAMEL ON THE STANDARD SAMPLE AND THE TIOH COLOR CHIP LISTED BELOW:

COLOR	CHIP NO.
RED	1
WHITE	28
BLUE	18

2. THE DEVICE SHALL BE CENTERED ON THE VERTICAL CENTERLINE OF THE BASE AND SHALL BE SOFT SOLDERED TO THE BASE.

3. THE ATTACHING DEVICE SHALL BE A PRONG WITH PICK AND FLAT BALL TYPE CLUTCH. THE PRONG SHALL BE CENTERED ON AND HARD SOLDERED OR FUSED TO THE BASE.

4. EACH LAPEL BUTTON SHALL BE MOUNTED ON A POLYETHLENE PAD AND PLACED IN A RIGID HINGED PLASTIC BOX HAVING A TRANSPARENT LID AND OPAQUE BOTTOM SECTION. THE BOX SHALL HAVE TWO PLASTIC HINGES AND CATCHES AND SHALL BE APPROXIMATELY 1-1/8 INCH SQUARE AND 5/8 INCH IN OVERALL DEPTH. THE PAD SHALL BE SIZED TO FIT THE BOX INTERIOR AND SHALL BE OF SUFFICIENT DEPTH TO RESTRICT MOVEMENT OF THE LAPEL BUTTON WHEN THE LID IS CLOSED.

Custodian:
Army - IH

Review activities:
DLA - CT

Preparing activity:
Army - IH

(Project No. 8455 - 0270)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:45Z
Check the source to verify that this is the current version before use.