NOT MEASUREMENT SENSITIVE


MIL-DTL-11484/111F(IH)
29 September 2026
SUPERSEDING
MIL-DTL-11484/111E(IH)
14 July 2020

DETAIL SPECIFICATION SHEET

LAPEL BUTTON, CIVILIAN AIDE, SECRETARY OF THE ARMY

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-11484.

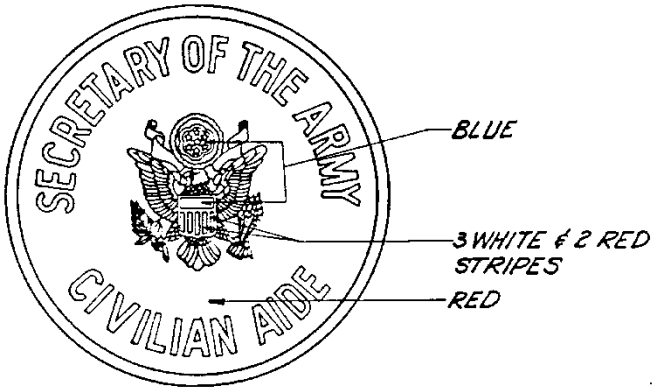

MATERIAL: Red Brass 85/15 (UNS Alloy No. C-230)

FINISH: (BASE and DEVICE) 24K Gold Plated, Matte Finish, Polished Highlights and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 8.

DIMENSION:
BASE:
DIAMETER: 5/8 inch (REF)
THICKNESS (At thickest point): 0.060 inch ± 0.005 inch
DEVICE:
HEIGHT (Overall): 11/32 inch (REF)
WIDTH (Overall): 5/16 inch (REF)
THICKNESS (At thickest point): 0.045 inch ± 0.005 inch

AMSC N/A FSC 8455

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:45Z
Check the source to verify that this is the current version before use.

ATTACHING DEVICE:

1. The attaching device for -1 shall be prong with pick and wing type clutch.

2. The prong shall be centered on the reverse side and fused or soldered to the lapel button.

3. The device shall be centered on the vertical center line of the base and shall be soft soldered to the base. When epoxy resin is used, the device shall be attached to the base by rivets.

EPOXY: Epoxy resin shall be applied to the lapel button as indicated above and shall match TIOH Hard Epoxy Color Chip Numbers listed below.

TIOH HARD EPOXY COLOR CHIPS	
COLOR	**CHIP NUMBER**
Red	#1
Blue	#18
White	#28

NOTES:

1. The term (REF) refers to the measurements taken from the obverse Government furnished hub or die.

2. Each lapel button shall be mounted and centered on a polyethylene pad and placed in a rigid hinged plastic box having a transparent lid and opaque bottom section. The box shall have two plastic hinges and catches and shall be approximately 1-1/8 inches square and 5/8 inch in overall depth. The pad well be of sufficient depth to restrict movement of the lapel button when the lid is closed.

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:45Z
Check the source to verify that this is the current version before use.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2026-585)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:45Z
Check the source to verify that this is the current version before use.