NOT MEASUREMENT SENSITIVE

MIL-DTL-11484/112C
27 September 1996
SUPERSEDING
MIL-L-11484/112B
14 January 1994

DETAIL SPECIFICATION SHEET

LAPEL BUTTON, NATIONAL DEFENSE EXECUTIVE RESERVE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-11484 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

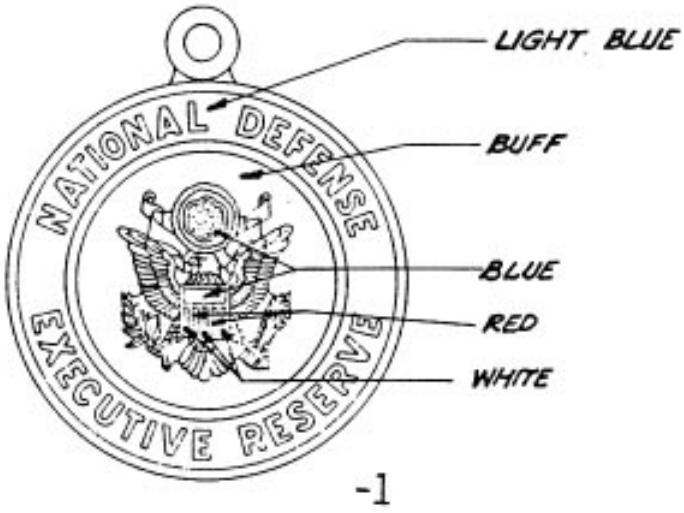

-1

DASH NO.
-1: Charm Emblem
-2: Lapel Button

MATERIAL: Gilding Medal

FINISH:
BASE: Hard Enameled, Gold Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 6.

DEVICE: Hard Enameled, Gold Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 8.

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:46Z
Check the source to verify that this is the current version before use.

DIMENSIONS:
BASE:
DIAMETER: 11/16 inch (1.75 cm) (REF)
THICKNESS (At Thickest Point): 0.060 inch ± 0.005 inch (0.152 cm ± 0.012 cm)
DEVICE:
HEIGHT (Overall): 11/32 inch (0.36 cm) (REF)
WIDTH (Overall): 5/16 inch (0.79 cm) (REF)
THICKNESS (At Thickest Point): 0.045 inch ± 0.005 inch (0.114 cm ± 0.012 cm)
ASSEMBLED THICKNESS (At Thickest Point): 0.105 inch ± 0.010 inch (0.267 cm ± 0.025 cm)

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Enameled areas shall be as indicated. The colors shall conform to the TIOH color chip numbers listed below or the standard sample.

COLOR	CHIP NO.
Red	1
Blue	18
White	28
Light Blue	30
Buff	35

3. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer.

4. The design illustrated is for Dash No. -1. The design for Dash No. -1 and -2 are identical except the lug is removed in trimming for Dash No. -2.

5. Attaching device for Dash No. -2 shall be prong with pick and flat ball type clutch. The prong shall be centered on the reverse side and fused or soldered to the lapel button.

6. Each lapel button or charm emblem shall be mounted and centered on a polyethylene pad and placed in a rigid hinged plastic box having a transparent lid and opaque bottom section. The box shall have two plastic hinges and catches and shall be approximately 1-1/8 inches (2.86 cm) square and 5/8 inch (1.59 cm) in overall depth. The pad shall be of sufficient depth to restrict movement of the lapel button when the lid is closed.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH
Review activities:
DLA - CT

Preparing activity:
Army - IH
(Project No. 8455-0858)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:46Z
Check the source to verify that this is the current version before use.