NOT MEASUREMENT SENSITIVE


MIL-DTL-11484/112E
14 July 2020
SUPERSEDING
MIL-DTL-11484/112D
14 September 2015

DETAIL SPECIFICATION SHEET

LAPEL BUTTON, NATIONAL DEFENSE EXECUTIVE RESERVE

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-11484.

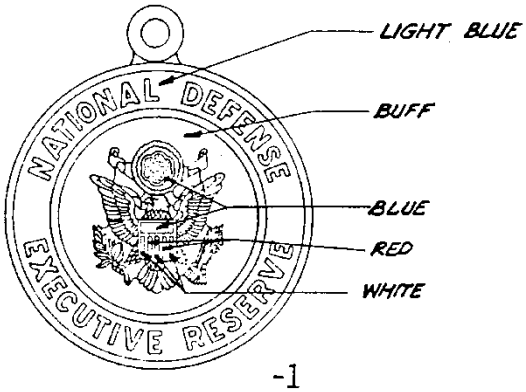

-1

DASH NO.
-1: Charm Emblem
-2: Lapel Button

MATERIAL: Red Brass 85/15 (UNS Alloy No. C-230)

FINISH:
BASE: Epoxy resin (Stoning epoxy) 24K Gold Plated, Mirror-like Polished and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 6
DEVICE: Epoxy resin (Stoning Epoxy) 24K Gold Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 8.

AMSC N/A FSC 8455

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:45Z
Check the source to verify that this is the current version before use.

DIMENSION:
BASE:
DIAMETER: 11/16 inch (REF)
THICKNESS (At thickest point): 0.060 inch ± 0.010 inch
DEVICE:
HEIGHT (Overall): 11/32 inch (REF)
WIDTH (Overall): 5/16 inch (REF)
THICKNESS (At thickest point): 0.045 inch ± 0.010 inch

ATTACHING DEVICE:

1. The attaching device for -2 shall be prong with pick and flat ball type clutch.

2. The prong shall be centered on the reverse side and fused or soldered to the lapel button.

3. The design illustrated is for -1. The design for -1 and -2 are identical except the lug is removed in trimming for -2.

EPOXY: Epoxy resin shall be applied to the lapel button as indicated above, and shall match TIOH Hard Enamel Color Chip Numbers listed below.

TIOH HARD ENAMEL COLOR CHIPS	
COLOR	**CHIP NUMBER**
Red	#1
Blue	#18
White	#28
Light Blue	#30
Buff	#35

NOTES

1. The term (REF) refers to the measurements taken from the obverse Government furnished hub or die.

2 Each lapel button or charm emblem shall be mounted and centered on a polyethylene pad and placed in a rigid hinged plastic box having a transparent lid and opaque bottom section. The box shall have two plastic hinges and catches and well be approximately 1-1/8 inches square and 5/8 inch in overall depth. The pad well be of sufficient depth to restrict movement of the lapel button when the lid is closed.

3. If hard cloisonné enamel is used, the base material must be Gilding Metal 95/5 (UNS Alloy No. C-210).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:45Z
Check the source to verify that this is the current version before use.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2020-413)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:45Z
Check the source to verify that this is the current version before use.