NOT MEASUREMENT SENSITIVE


MIL-DTL-11484/112G(IH)
29 September 2026
SUPERSEDING
MIL-DTL-11484/112F(IH)
14 May 2025

DETAIL SPECIFICATION SHEET

LAPEL BUTTON, NATIONAL DEFENSE EXECUTIVE RESERVE

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-11484.

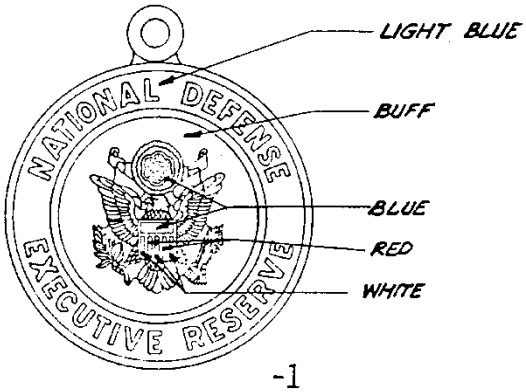

-1

DASH NO.
-1: Charm Emblem
-2: Lapel Button

MATERIAL: Red Brass 85/15 (UNS Alloy No. C-230)

FINISH:
BASE: Epoxy resin (Stoning epoxy) 24K Gold Plated, Mirror-like Polished and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 6
DEVICE: Epoxy resin (Stoning Epoxy) 24K Gold Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 8.

AMSC N/A FSC 8455

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:45Z
Check the source to verify that this is the current version before use.

DIMENSION:
BASE:
DIAMETER: 11/16 inch (REF)
THICKNESS (At thickest point): 0.060 inch ± 0.005 inch
DEVICE:
HEIGHT (Overall): 11/32 inch (REF)
WIDTH (Overall): 5/16 inch (REF)
THICKNESS (At thickest point): 0.045 inch ± 0.005 inch

ATTACHING DEVICE:

1. The attaching device for -2 shall be prong with pick and wing type clutch.

2. The prong shall be centered on the reverse side and fused or soldered to the lapel button.

3. The design illustrated is for -1. The design for -1 and -2 are identical except the lug is removed in trimming for -2.

EPOXY: Epoxy resin shall be applied to the lapel button as indicated above and shall match TIOH Hard Epoxy Color Chip Numbers listed below.

TIOH HARD EPOXY COLOR CHIPS	
COLOR	**CHIP NUMBER**
Red	#1
Blue	#18
White	#28
Light Blue	#30
Buff	#35

NOTES

1. The term (REF) refers to the measurements taken from the obverse Government furnished hub or die.

2 Each lapel button or charm emblem shall be mounted and centered on a polyethylene pad and placed in a rigid hinged plastic box having a transparent lid and opaque bottom section. The box shall have two plastic hinges and catches, and we'll be approximately 1-1/8 inches square and 5/8 inch in overall depth. The pad well be of sufficient depth to restrict movement of the lapel button when the lid is closed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:45Z
Check the source to verify that this is the current version before use.

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2026-586)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:45Z
Check the source to verify that this is the current version before use.