
METRIC

DOD-B-15072/10(SH)
2 September 1981
SUPERSEDING
DOD-B-15072/2B(SH)
26 April 1976


MILITARY SPECIFICATION SHEET
BATTERY, STORAGE, LEAD-ACID, PORTABLE, TYPES
6V - 205 AH - H/S - A OR B AND 8V - 205 AH - H/S - A OR B (METRIC)

This specification sheet is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.


The complete requirements for acquiring the battery described herein shall consist of this document and the latest issue of DOD-B-15072.



6 VOLT

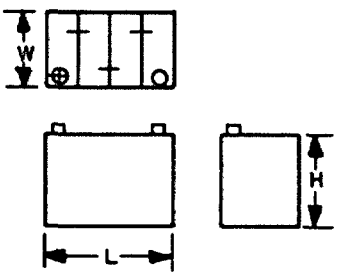

8 VOLT



TYPE ARRANGEMENT

SH 11981

Military part number	Volts	Ah	Rate/discharge	Type	Dimensions			Final cut-off volts		
					L	W	H	10 Hour	2 Hour	5 Minute
M15072/10-001	6	205	High/shallow	A	650	195	245	5.25	4.8	3.6
M15072/10-002	8	205	High/shallow	A	685	254	275	7	6.4	4.8
M15072/10-003	6	205	High/shallow	B	650	195	245	5.25	4.8	3.6
M15072/10-004	8	205	High/shallow	B	685	254	275	7	6.4	4.8

Notes:

1. Dimensions are in millimeters (mm).
2. Unless otherwise specified, tolerances are plus or minus 3 mm.
3. Terminals shall be capable of receiving a round end lug accepting a 100 mm^2 cable.

FSC 6140

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:28Z
Check the source to verify that this is the current version before use.

Requirements:

Electrolyte at 27°C: 1.265 specific gravity
Design and construction: See figure
Mass (filled): 65 kilograms (kg) for 6 volts (V)
Mass (filled): 85 kg for 8 V
Terminals: Posts with lugs
Rated capacities (at 1.220 specific gravity):
10-hour rate: 205 ampere-hours (Ah)
2-hour rate: 134 Ah
5-minute rate: 40 Ah
Discharge rates:
10-hour rate: 20.5 amperes (A)
2-hour rate: 67 A
5 minute rate: 480 A
Performance (at 1.265 specific gravity):
Cranking performance amps at minus 18°C: 1100 A
Reserve capacity minutes at 27°C: 390 minutes
Life test:

Requirements for completed batteries	
Over 80 percent rated capacity at rates	Minimum test value
67 A 480 A	150 cycles

Unit package: 1 battery
Shipping container: 1 unit package

Preparing activity:
Navy - SH
(Project 6140-N534)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:28Z
Check the source to verify that this is the current version before use.

NOTICE
OF VALIDATION

METRIC
DOD-B-15072/10(SH)
NOTICE 1
20 April 1989

MILITARY SPECIFICATION

BATTERIES, STORAGE, LEAD-ACID, PORTABLE, TYPES
6V - 205 AH - H/S - A OR B AND 8V - 205 AH - H/S - A OR B (METRIC)

DOD-B-15072/10(SH), dated 2 September 1981, has been reviewed and determined to be valid for use in acquisition.

Preparing activity:
Navy - SH

AMSC N/A
FSC 6140

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:28Z
Check the source to verify that this is the current version before use.