
METRIC

DOD-B-15072/11(SH)
2 September 1981
SUPERSEDING
DOD-B-15072/4C(SH)
26 April 1976


MILITARY SPECIFICATION SHEET
BATTERY, STORAGE, LEAD-ACID, PORTABLE, TYPE
12V - 15 AH - L/D - A OR B (METRIC)

This specification sheet is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the battery described herein shall consist of this document and the latest issue of DOD-B-15072.

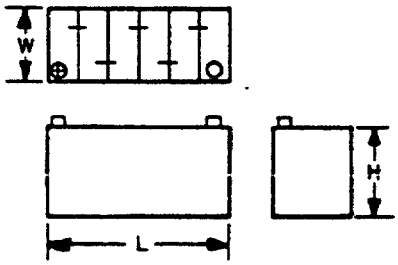

12 VOLT



TYPE ARRANGEMENT

SH 11982

Military part number	Volts	Ah	Rate/discharge	Type	BCI Group Size	Dimensions			Final cut-off volts		
						L	W	H	10 Hour	2 Hour	5 Minute
M15072/11-001	12	15	Low/deep	A	U-1	197	132	186	10.50	9.6	7.2
M15072/11-002	12	15	Low/deep	B	U-1	197	132	186	10.50	9.6	7.2

Notes:

1. Dimensions are in millimeters (mm).
2. Unless otherwise specified, tolerances are plus or minus 3 mm.
3. Terminals shall be capable of receiving a round end lug accepting a 5 mm^2 cable.

FSC 6140

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:28Z
Check the source to verify that this is the current version before use.

Requirements:

Electrolyte at 27°C: 1.265 specific gravity
Design and construction: See figure
Mass (filled): 10 kilograms maximum
Terminals: Battery Council International type V supplied with wingnuts
Rated capacities (at 1.220 specific gravity):
10-hour rate: 15 ampere-hours (Ah)
2-hour rate: 10 Ah
5-minute rate: 3 Ah
Discharge rates:
10-hour rate: 1.5 amperes (A)
2-hour rate: 5 A
5 minute rate: 36 A
Performance (at 1.265 specific gravity):
Cranking performance amps at minus 18°C: 155 A
Reserve capacity minutes at 27°C: 25 minutes
Life test:

Requirements for completed batteries	
Over 80 percent rated capacity at rates	Minimum test value
5 A 36 A	400 cycles

Unit package: 1 battery
Shipping container: 12 unit packages
Arrangement: 4-3-1

Preparing activity:
Navy - SH
(Project 6140-N535)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:28Z
Check the source to verify that this is the current version before use.