
METRIC

DOD-B-15072/13(SH)
2 September 1981
SUPERSEDING
DOD-B-15072/6B(SH)
26 April 1976

MILITARY SPECIFICATION SHEET
BATTERY, STORAGE, LEAD-ACID, PORTABLE, TYPES 6V - 130 AH - H/S - A OR B, 8V - 130 AH - H/S - A OR B, AND 12V- 130 AH - H/S - A OR B (METRIC)

This specification sheet is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the battery described herein shall consist of this document and the latest issue of DOD-B-15072.

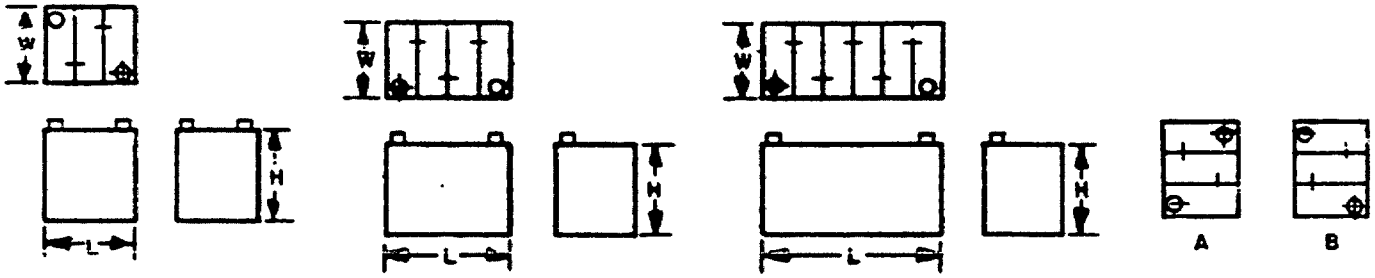

6 VOLT 8 VOLT 12 VOLT TYPE ARRANGEMENT

SH11984

Military part number	Volts	Ah	Rate/discharge	Type	BCI Group	Dimensions			Final cut-off volts		
						L	W	H	10 Hour	2 Hour	5 Minute
M15072/13-001	6	130	High/shallow	A	7D	413	181	238	5.25	4.8	3.6
M15072/13-002	8	130	High/shallow	A		625	191	275	7	6.4	4.8
M15072/13-003	12	130	High/shallow	A	8D	540	283	276	10.50	9.6	7.2
M15072/13-004	6	130	High/shallow	B	7D	413	181	238	5.25	4.8	3.6
M15072/13-005	8	130	High/shallow	B		625	191	275	7	6.4	4.8
M15072/13-006	12	130	High/shallow	B	8D	540	283	276	10.50	9.6	7.2

Notes:

1. Dimensions are in millimeters (mm).
2. Unless otherwise specified, tolerances are plus or minus 3 mm.
3. Terminals shall be capable of receiving a round end lug accepting a 100 mm^2 cable.

FSC 6140

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:29Z
Check the source to verify that this is the current version before use.

Requirements:

Electrolyte at 27°C: 1.265 specific gravity
Design and construction: See figure
Mass (filled): 35 kilograms (kg) maximum for 6 volts (V)
Mass (filled): 50 kg maximum for 8 V
Mass (filled): 60 kg maximum for 12 V
Terminals: Posts with lugs
Rated capacities (at 1.220 specific gravity):
- 10-hour rate: 130 ampere-hours (Ah)
- 2-hour rate: 85 Ah
- 5-minute rate: 26 Ah

Discharge rates:
- 10-hour rate: 13 amperes (A)
- 2-hour rate: 42.5 A
- 5 minute rate: 312 A

Performance (at 1.265 specific gravity):
- Cranking performance amps at minus 18°C: 965 A
- Reserve capacity minutes at 27°C: 370 minutes

Life test:

Requirements for completed batteries	
Over 80 percent rated capacity at rates	Minimum test value
42.5 A 310 A	150 cycles

Unit package: 1 battery
Shipping container: 2 unit packages
Arrangement: 1-2-1

Preparing activity:
Navy - SH
(Project 6140-N537)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:29Z
Check the source to verify that this is the current version before use.

NOTICE
OF VALIDATION

METRIC
DOD-B-15072/13(SH)
NOTICE 1
20 April 1989

MILITARY SPECIFICATION

BATTERIES, STORAGE, LEAD-ACID, PORTABLE, TYPES
6V - 130 AH - H/S - A OR B, 8V - 130 AH - H/S - A OR B,
AND 12V - 130 AH - H/S - A OR B (METRIC)

DOD-B-15072/13(SH), dated 2 September 1981, has been reviewed and determined to be valid for use in acquisition.

Preparing activity:
Navy - SH

AMSC N/A
FSC 6140
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:29Z
Check the source to verify that this is the current version before use.