METRIC

DOD-B-15072/3F(SH)
2 September 1981
SUPERSEDING
DOD-B-15072/3E(SH)
26 April 1976

MILITARY SPECIFICATION SHEET


(F) BATTERY, STORAGE, LEAD-ACID, PORTABLE,

TYPE 2V - 20 AH - L/D - A (METRIC)

This specification sheet is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the battery described herein shall consist of this document and the latest issue of DOD-B-15072.

(F)

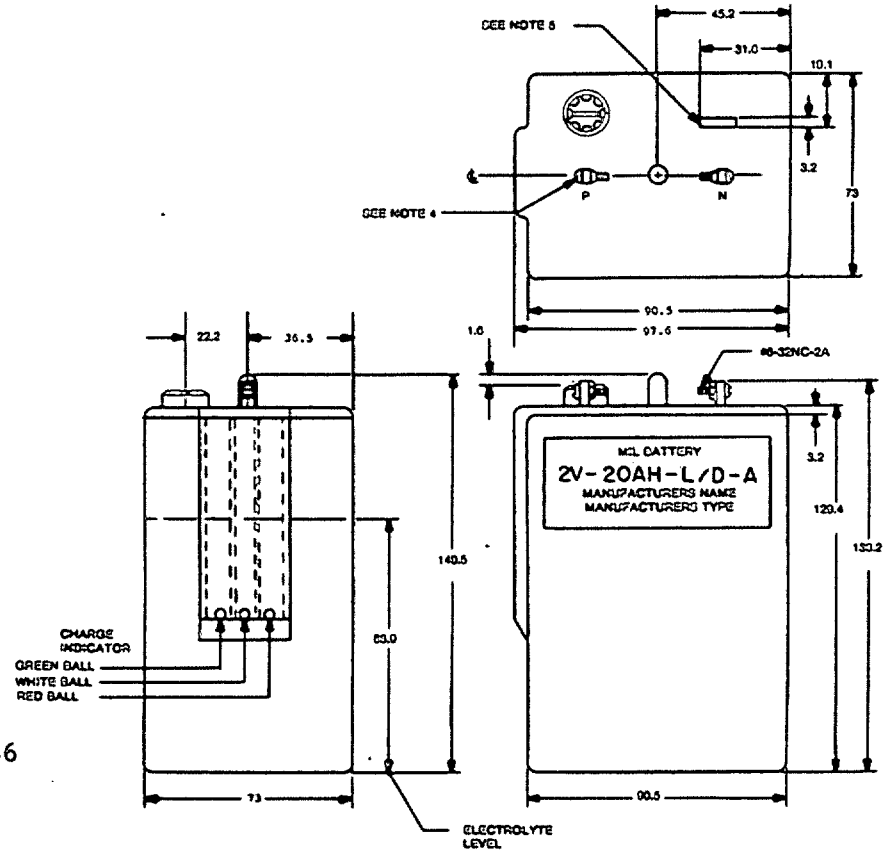

SH 11986

Notes:

1. Dimensions are in millimeters (mm).
2. Unless otherwise specified, tolerances are plus or minus 0.8 mm.
3. Cover shall be cemented to container.
4. Rubber bushings shall be well lubricated with cement.
5. Space shall be left on the flush surface of the cover for the date of initial charge.

(F) denotes changes

FSC 6140

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:28Z
Check the source to verify that this is the current version before use.

Requirements:

(F) Electrolyte retaining
Electrolyte at 27°C: 1.280 ± 0.005 specific gravity
Design and construction: See figure
Mass (filled): 1.8 kilograms (kg) maximum
(F) Charge indicators: Three balls - These balls shall be of the colors indicated below and shall just float in the thoroughly mixed electrolyte at 27°C thus indicating the remaining percentage of its rated capacity.

Green, white, and red	-	90 percent
White and red	-	50 percent
Red (alone)	-	10 percent

Terminals: Screw and nut
Rated capacities:
10-hour rate: 20 ampere-hours (Ah)
5-hour rate: 13.5 Ah
5-minute rate: 3.75 Ah
Discharge rates:
10-hour rate: 2 amperes (A)
5-hour rate: 2.7 A
5-minute rate: 45 A
(F) Performance:
Cranking performance amps at minus 18°C: Not required
Reserve capacity minutes at 27°C: Not required

Identification plate (see figure): Acid-proof material cemented permanently to the battery. Printed matter, either an acid-proof black ink on a white background or ink coated with a clear, transparent, acid-proof material. Marking shall remain legible throughout all of the tests specified herein.

Life test:

(F)

Requirements for completed batteries	
Over 80 percent rated capacity at rates	Minimum test value
2.7 A 45 A	150 cycles

Unit package: 1 battery
Shipping container: 32 unit packages
Arrangement: 4-4-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:28Z
Check the source to verify that this is the current version before use.

INSTRUCTION TAG

FILLING AND CHARGING INSTRUCTIONS

1. Remove seal over vent.
2. Remove filler plug and fill to level line with sulfuric acid (electrolyte) of 1.280 ± 0.005 specific gravity at 27°C.
3. Stand 1 to 4 hours after filling, then adjust electrolyte to level line.
4. Charge at 3 amperes for 7 to 8 hours.

SERVICE

1. Keep electrolyte to level line by addition of distilled water.
2. Recharge at 3 amperes for 7 to 8 hours, or until the voltage stops rising when checked at hourly intervals.
3. Do not store in discharged condition.
4. After activation, recharge every 30 days when standing in stock.

Preparing activity:
Navy - SH
(Project 6140-N544)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:28Z
Check the source to verify that this is the current version before use.

NOTICE
OF VALIDATION

METRIC
DOD-B-15072/3F(SH)
NOTICE 1
20 April 1989

MILITARY SPECIFICATION

BATTERIES, STORAGE, LEAD-ACID, PORTABLE, TYPE 2V - 20 AH - L/D - A (METRIC)

DOD-B-15072/3F(SH), dated 2 September 1981, has been reviewed and determined to be valid for use in acquisition.

Preparing activity:
Navy - SH

AMSC N/A FSC 6140

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:28Z
Check the source to verify that this is the current version before use.