METRIC


DOD-B-15072/9(SH)
2 September 1981

SUPERSEDING
DOD-B-15072/1B(SH)
26 April 1976


MILITARY SPECIFICATION SHEET
BATTERY, STORAGE, LEAD-ACID, PORTABLE, TYPES
6V - 50 AH - L/D - A OR B AND 12V - 50 AH - L/D - A OR B (METRIC)

This specification sheet is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.


The complete requirements for acquiring the battery described herein shall consist of this document and the latest issue of DOD-B-15072.



6 VOLT

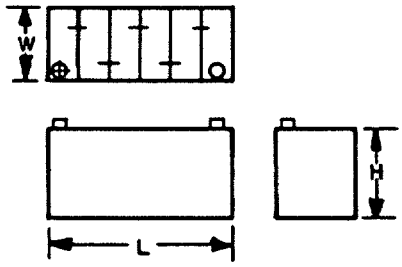

12 VOLT



TYPE ARRANGEMENT

SH 11980

Military part number	Volts	Ah	Rate/discharge	Type	BCI Group Size	Dimensions			Final cut-off volts		
						L	W	H	10 Hour	2 Hour	5 Minute
M15072/9-001	6	50	Low/deep	A	1	232	181	238	5.25	4.8	3.6
M15072/9-002	12	50	Low/deep	A	30H	343	173	235	10.50	9.6	7.2
M15072/9-003	6	50	Low/deep	B	1	232	181	238	5.25	4.8	3.6
M15072/9-004	12	50	Low/deep	B	30H	343	173	235	10.50	9.6	7.2

Notes:

1. Dimensions are in millimeters (mm).
2. Unless otherwise specified, tolerances are plus or minus 3 mm.
3. Terminals shall be capable of receiving a round end lug accepting a 30 mm^2 cable.

FSC 6140

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:28Z
Check the source to verify that this is the current version before use.

Requirements:

Electrolyte at 27°C: 1.265 specific gravity
Design and construction: See figure
Mass (filled): 20 kilograms (kg) maximum for 6 volts (V)
Mass (filled): 29 kg maximum for 12 V
Terminals: Battery Council International type V supplied with wingnuts
Rated capacities (at 1.220 specific gravity):
    10-hour rate: 50 ampere-hours (Ah)
    2-hour rate: 32 Ah
    5-minute rate: 10 Ah
Discharge rates:
    10-hour rate: 5 amperes (A)
    2-hour rate: 16 A
    5 minute rate: 120 A
Performance (at 1.265 specific gravity):
    Cranking performance amps at minus 18°C: 400 A
    Reserve capacity minutes at 27°C: 130 minutes
Life test:

Requirements for completed batteries	
Over 80 percent rated capacity at rates	Minimum test value
16 A 120 A	500 cycles

Unit package: 1 battery
Shipping container: 3 unit packages
Arrangement: 1-3-1

Preparing activity:
Navy - SH
(Project 6140-N533)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:28Z
Check the source to verify that this is the current version before use.

NOTICE
OF VALIDATION

METRIC
DOD-B-15072/9(SH)
NOTICE 1
20 April 1989

MILITARY SPECIFICATION

BATTERIES, STORAGE, LEAD-ACID, PORTABLE, TYPES 6V - 50 AH - L/D - A OR B AND 12V - 50 AH - L/D - A OR B (METRIC)

DOD-B-15072/9(SH), dated 2 September 1981, has been reviewed and determined to be valid for use in acquisition.

Preparing activity:
Navy - SH

AMSC N/A
FSC 6140

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:28Z
Check the source to verify that this is the current version before use.