INCH-POUND

MIL-C-15065J
16 February 1990
SUPERSEDING
MIL-C-15065H
29 December 1986

MILITARY SPECIFICATION

COAT FRONTS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This document covers coat front interlinings for coats and overcoats.

* 1.2 Classification. The coat fronts shall be of sizes as specified in 3.4.2 and 6.2 and of the following types (see 6.2):

Type I - For Coats, Men's, Tropical and Serge, Polyester/Wool, Army Green 344 (Army)

Type II - Deleted

Type III - For Overcoat, Man's, Army Green 44, with Removable Liner (Army)

Type IV - For Coats, Women's Wool and Polyester/Wool (Army)

Type VI - For Coat, Man's, Polyester/Wool (Navy); Coat, Man's, Wool, Winter (Navy)

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: U.S. Army Natick Research, Development, and Engineering Center, Natick, MA 01760-5014 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8315

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

Type VII - For Uniform, Man's, Aviation Working (Green) (Single Breasted) (Navy)

Type VIII - Deleted

Type IX - For Coat, Man's Service, Polyester/Wool, Green (with Belt) (MC)

Type X - For Coat, Man's Service, Winter, Wool, Green; and Coat, Man's, Wool, Serge, Green (with Belt) (MC)

Type XI - For Coat, Man's, Wool Gabardine, Blue Dress (MC)

Type XII - For Overcoat, Man's, Wool, Serge, Green; or Gabardine, Blue (MC)

Type XIII - For Coats, Women's, Wool, Serge, Green 2207, and Wool, Elastique, Dark Blue 2309; and Coat, Woman's, Wool, Gabardine, Blue (MC)

Type XIV - For Overcoat, Man's (Officer's Type) (Navy)

Type XV - For Coat, Woman's, Polyester/Wool, Green 2241 (MC)

Type XVI - For Coat, Woman's, Blue Dress (Navy)

Type XVII - For Coat, Man's, Polyester/Wool, Serge (CG)

Type XVIII - For Coat, Men's, Tropical and Serge, Polyester/Wool, Army Green 344, Fusible (Army)

Type XIX - For Overcoat, Man's, Enlisted (Navy)

Type XX - For Overcoat, Woman's, Enlisted (Navy)

Type XXI - Coat, Woman's, Dress (CG)

Type XXII - Topcoat, Man's, Polyester, Elastique (CG)

Type XXIII - Overcoat, Man's, Reefer (CG)

Type XXIV - Uniform, Woman's, Aviation, Working, Green (Navy)

Type XXV - For Coat, Woman's, Classic Design, Polyester/Wool, AG-344, Fusible (Army)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

A-A-203	-	Paper, Kraft, Untreated
C-F-206	-	Felt Sheet: Cloth, Felt, Wool, Pressed
V-T-276	-	Thread, Cotton
CCC-C-458	-	Cloth, Flannel, Cotton
DDD-L-20	-	Label: For Clothing, Equipage, and Tentage, (General Use)
PPP-B-636	-	Boxes, Shipping, Fiberboard

MILITARY

MIL-C-297	-	Cloth, Interlining, Cotton or Synthetic Warp, and Spun Hair-Wool or Rayon Filling
MIL-C-43718	-	Cloth, Polyester; Polyester and Cotton; Polyester and Rayon, for Pockets

STANDARDS

FEDERAL

FED-STD-191	-	Textile Test Methods
FED-STD-751	-	Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	-	Marking for Shipment and Storage
MIL-STD-147	-	Palletized Unit Loads
MIL-STD-731	-	Quality of Wood Members for Containers and Pallets

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Documents Order Desk, Bldg-4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

CODE OF FEDERAL REGULATIONS

Title 9 - Animal and Animal Products

Part 95 - Sanitary Control of Animal By-Products

(The Code of Federal Regulations (CFR) and the Federal Register (FR) are for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402. When indicated, reprints of certain regulations may be obtained from the Federal agency responsible for issuance thereof.)

* 2.2 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

D 3951 - Standard Practice for Commercial Packaging

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103-1187.)

THE COLOR ASSOCIATION OF THE UNITED STATES

Standard Color Card of America

Department of Defense Standard Color Card for Sewing Threads

(Color cards may be available from the Color Association of the United States, 343 Lexington Avenue, New York, NY 10016-0927. If color cards are not available from the Color Association, individual color samples may be obtained from the contracting activity or as directed by the contracting activity.)

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:27Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

* 3.1 First article. When specified (see 6.2), a sample shall be subjected to first article inspection (see 6.3) in accordance with 4.3.

3.2 Samples. Samples, when furnished, are solely for guidance and information to the contractor (see 6.4). Variation from this specification may appear in the sample, in which case this specification shall govern.

3.3 Material. It is encouraged that recycled material be used when practical as long as it meets the requirements of this specification.

* 3.3.1 Basic material. The materials for coat fronts shall be cotton warp and spun hair-wool filling interlining cloth conforming to MIL-C-297 in the types and classes indicated below. For types IV and VII coat fronts, the material shall conform to class 1 (natural). For all other type coat fronts, and as an option for type IV coat front, the material shall conform to class 2 (dyed black).

Coat front types	Cloth (type and class from MIL-C-297)
I, IX, XV, XVI	Type III, class 2
IV	Type III, class 1 or class 2
III, VI, VII, X, XI, XII, XIII, XIV, XVII, XIX, XX, XXI, XXII, XXIII, XXV	Type I, class 2
XXIV	Type III, class 1
Floating chest piece type	
XVIII	Type I, class 1 and 2

* 3.3.2 Haircloth. The material for the shoulder pieces (types IV, VI, VII, XIV, XVII, XVIII and XXII), chest pieces and reinforcement piece for top front corners (type XI) shall be 2-ply cotton warp and natural horsehair filling cloth, undyed, having not less than 60 ends and 40 picks per inch, weighing not less than 4.5 ounces per square yard, and containing no sizing (see 4.4.1.1). An alternate for types VI, XVIII, XIX, and XXI shoulder piece may include fabric having warp yarns made from 100 percent cotton, from 100 percent polyester, from any combination of polyester and cotton, or from 45 to 100 percent polyester with the remaining percentage rayon. The filling yarns of the alternate fabric shall be made from 100 percent nylon mono-filament. The fabric shall contain not less than 50 ends and 42 picks per inch, and shall weigh not less than 5.6 ounces per square yard (see 4.4.1.1). The stiffness of the nylon filling shall be 0.060 to 0.14 load pound (see 4.4.1.1). The horsehair shall meet current Quarantine Laws and pertinent regulations of the U.S. Department of Agriculture as set forth in the Code of Federal Regulations (see 2.1.2).

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:27Z
Check the source to verify that this is the current version before use.

* 3.3.3 Polyester and cotton cloth. The material for the components listed in table I shall be polyester and cotton cloth undyed or in colors as indicated, conforming to class 1 of MIL-C-43718.

TABLE I. Polyester and cotton cloth components

Component	Type(s)					
	I	III, IV, VI, VII, and XIV	XVI, XVII and XXI	XI	XII	XIII and XV
Stays:						
(undyed or black)	X	-	X	-	-	-
(undyed)	-	X		X	X	X
Chest piece bottom covering:						
(undyed)	-	-	-	X	-	-
Top front corner reinforcement covering:						
(undyed)	-	-	-	X	-	-

* 3.3.4 Padding. The padding for chest (types I, III, VI, IX, X, XI, XII, XIII, XV, XVII, XVIII, and XXII) shall be either felt or flannel. The padding for chest (types VII, XIV, XIX,, XX, XXI, XXIV, and XXV) and for shoulder (types IV and XVI) shall be felt.

3.3.4.1 Felt. The felt shall be pressed wool conforming to type III (roll-felt), classification 11A2 of C-F-206.

3.3.4.2 Flannel. The flannel shall be unbleached, double-napped, conforming to type II, class 1 of CCC-C-458.

3.3.5 Labels. Each coat front shall have an identification label (applicable only when coat fronts are purchased directly by the Government) and a size label conforming to DDD-L-20. The fastness to drycleaning requirements of DDD-L-20 shall apply.

3.3.5.1 Identification label. The identification label shall be applied directly above the size label and shall conform to type IV, class 1, except that the characters of the inscription shall be not less than 1/4 inch in height.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

3.3.5.2 Size label. The size label shall be applied to the bottom end of each left and right front and shall conform to type IV, class 2, except that the characters of the inscription shall be not less than 3/8 inch or more than 5/8 inch in height. The size label shall include the numerical designation followed by S for short, R for regular and L for long. In addition, each coat front shall be labeled to indicate the left front and the right front by preceding the size designation with the letters LT for left and RT for right as shown in the following examples:

LT 38R RT 38R

3.3.6 Thread. The thread for seaming and stitching the fronts shall be cotton, soft finish, type IA1 or type IA2, shade White AH, C.A. 66050, ticket No. 50 or 70, 2-ply, conforming to V-T-276.

3.4 Patterns.

* 3.4.1 Pattern parts. The component parts of the fronts shall be cut from specified materials in accordance with pattern parts indicated in table II.

TABLE II. List of pattern parts

Component	Pattern nomenclature	Cut parts
	Type I	
Basic material	Right front	1
	Left front	1
	Chest piece	2
	Wedge piece (shoulder dart)	2
Felt or flannel	Chest padding	2
	Type III	
Basic material	Front	2
	Chest piece	2
	Wedge piece (shoulder dart)	2
Felt or flannel	Chest padding	2
	Type IV	
Basic material	Front	2
	Side front	2

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:27Z
Check the source to verify that this is the current version before use.

TABLE II. List of pattern parts (cont'd)

Component	Pattern nomenclature	Cut parts
	Type IV (cont'd)	
Felt	Front shoulder piece	2
	Shoulder padding	2
Haircloth	Shoulder piece	2
	Types VI, XVII, XXII, and XXIII	
Basic material	Front	2
	Chest piece	2
	Wedge piece (shoulder dart)	2
Felt or flannel	Chest padding (type XXIII flannel only)	2
Haircloth (or alternate for type VI see 3.3.2)	Shoulder piece	2
	Types VII and XIV	
Basic material	Front	2
	Side front	2
	Front chest	2
	Side chest	2
	Reinforcement piece	2
Felt	Chest padding	2
Haircloth	Shoulder piece	2
	Types IX and X	
Basic material	Front	2
	Chest piece	2
	Wedge piece (shoulder)	4
Hair cloth	Shoulder piece	2
Felt or flannel	Chest padding	2

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

TABLE II. List of pattern parts (cont'd)

Component	Pattern nomenclature	Cut parts
	Type XI	
Basic material	Right front	1
	Left front	1
Haircloth	Right chest piece	1
	Left chest piece	1
	Top front corner reinforcement	2
Felt or flannel	Right chest padding	1
	Left chest padding	1
Polyester and cotton cloth	Top front corner reinforcement and chest piece front covering	2
	Chest piece bottom edge covering	2
	Dart stay	2
	Type XII	
Basic material	Right front	1
	Left front	1
	Chest piece	2
	Shoulder dart stay	2
Polyester and cotton cloth	Neck dart stay	2
Felt or flannel	Chest padding	2
	Types XIII and XV	
Basic material	Front	2
	Side front	2
	Type XVI	
Basic material	Front	2
	Side front	2
Felt	Shoulder padding	2
Haircloth	Shoulder piece	2

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:27Z
Check the source to verify that this is the current version before use.

TABLE II. List of pattern parts (cont'd)

Component	Pattern nomenclature	Cut parts
	Type XVIII	
Basic material	Chest piece	2
	Shoulder piece	2
Felt or flannel	Chest padding	2
Haircloth (or alternate see 3.3.2)	Shoulder reinforcement piece	2
	Type XIX	
Basic material	Front	2
	Chest piece	2
Felt	Chest padding	2
Haircloth (or alternate see 3.3.2)	Shoulder piece	2
	Type XX	
Basic material	Front	2
Felt	Chest padding	2
	Type XXI	
Basic material	Front	2
Felt	Chest piece	2
Haircloth (or alternate see 3.3.2)	Shoulder piece	2
	Type XXIV	
Basic material	Front	2
	Chest piece	2
Felt	Chest padding	2

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

TABLE II. List of pattern parts (cont'd)

Component	Pattern nomenclature	Cut parts
	Type XXV	
Basic material	Chest piece interlining	2
	Shoulder wedge	2
	Shoulder piece interlining	2
Felt	Shoulder piece	2

3.4.2 Sizes. The coat fronts shall conform to the sizes specified in the applicable end item specification or procurement document and shall be fabricated in accordance with the standard patterns applicable thereto.

3.4.3 Coat fronts purchased by an end item manufacturer. When coat fronts are purchased by an end item manufacturer as a component of an end item, standard patterns of the coat fronts will be furnished by the Government (see 6.2). The patterns furnished shall be used by the contractor for cutting working patterns. The working patterns shall be identical to the Government patterns. Neither the Government patterns nor the working patterns shall be altered in any way.

3.4.4 Coat fronts purchased directly by the Government. When coat fronts are purchased directly by the Government, standard patterns shall be furnished by the Government to the contractor for cutting working patterns (see 6.2). The working patterns shall be identical to the Government patterns. Neither the Government patterns nor the working patterns shall be altered in any way.

3.5 Construction. The construction shall conform in all respects to the requirements specified in table III and herein. Figures are furnished solely for guidance and information. Should variation from the written document appear in any figure, the document shall govern.

3.5.1 Stitches, seams, and stitching. The stitch, seam, and stitching type shall be as specified in table III and shall conform to FED-STD-751.

3.5.2 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in table III.

3.5.3 Pressing. Steam shrinkage and dry pressing operations specified in table III shall be performed on steam pressing machines shaped for right and left fronts.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

* 3.6 Manufacturing operations requirements The fronts shall be manufactured in accordance with all operation requirements specified in table III. The contractor is not required to follow the exact sequence of operations as long as all requirements are met.

3.7 Use of automated apparel equipment. Automated apparel equipment may be used to perform any of the operations specified in table III, providing that the seam and stitch type are as specified and the finished component conforms to the required configuration. When a government furnished shaper pattern is forwarded, the component shall conform to that pattern.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

NO.	TABLE III. MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
1.	Cutting. a. The coat fronts shall be cut in strict accordance with applicable patterns furnished, which show type, size, directional lines, and marks and notches for proper assembly unless otherwise stated. b. Basic material. (1) Dress the left front as indicated on pattern (type I only). c. Haircloth. Types IV, VI, VII, and XIV. (1) Cut the shoulder pieces on the bias. Type XI. (1) Cut the chest pieces on the straight (warp direction). (2) Cut the reinforcement for the top front corner of fronts across the material (filling direction). Type XVIII. (1) Cut the shoulder reinforcement piece in accordance with patterns.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

NO.	TABLE III. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
1.	Cutting. (cont'd) d. Polyester and cotton cloth. Types I, III, and IV. (1) Cut the stays on the bias 3/4 to 1 inch wide. Types VI, VII, and XVII. (1) Cut the stays on the bias 3/4 to 1 inch wide. (2) Cut the 2 by 5-inch stays on the bias (types VI and VII only). Type XI. (1) Cut the dart stay, and cover for bottom edge of chest piece on the bias. (2) Cut the cover for haircloth reinforcement and chest piece on the straight (warp direction). Type XII. (1) Cut neck dart stay on bias. Types XIII, XIV, and XV. (1) Cut stay piece on bias 3/4 to 1 inch wide.						

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

NO.	TABLE III. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
1.	Cutting. (cont'd)						
	e. Felt or flannel.						
	Types I, III, IV, IX, X, XI, XII, XIII, XV, XVII, and XVIII.						
	(1) Cut the felt for chest padding in any direction. If flannel is used, cut on the bias.						
	Type XVIII.						
	(1) Cut the felt for the chest padding in accordance with pattern.						
	f. Felt.						
	Type IV.						
	(1) Cut the shoulder padding in any direction.						
	Types VI, VII, XIV, and XVII.						
	(1) Cut the chest padding in any direction.						
2.	Replacement of damaged parts.						
	During the spreading, cutting, and manufacturing processes, components having material defects or damages that are classified as defects in 4.4.2 shall be removed from production and replaced with nondefective and properly matched components.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

TABLE III. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
3.	Make type I fronts.						
	a. Spread shoulder dart on front section and stitch to wedge piece with the edges overlapped. Mark on wedge piece pattern part to show spread of dart.	304		4-8	70-2	70-2	
	b. Abut or overlap 1/8 inch the edges of the armhole dart and waist dart on front sections and stitch through the polyester and cotton cloth stays with stays on outer side. The abutted or overlapped edges may be stitched together prior to stitching through stay.	304	FSa-1 or LSa-1	4-8	70-2	70-2	
	c. Overlap the edge of the armhole dart 1/8 inch on chest piece and stitch together.	304	LSa-1	4-8	70-2	70-2	
	or						
	d. Abut the edges of the armhole dart and stitch through the polyester and cotton cloth stay piece. (The abutted edges may be stitched together prior to stitching through stay.)	304	FSa-1	4-8	70-2	70-2	
	e. Position chest piece on underside of front section in accordance with marks on pattern and stitch together along front and bottom edge of chest piece.	304		4-8	70-2	70-2	
	f. Spread shoulder dart on chest piece and stitch to front through the wedge piece.	304		4-8	70-2	70-2	
	g. Stitch a vertical line at center of chest piece through front section.	304	SSv-1	4-8	70-2	70-2	

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

TABLE III. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
3.	Make type I fronts. (cont'd)						
	h. Position padding on chest piece with the padding extending beyond the shoulder, armhole, and side of front section. Quilt all plies together with the rows of stitching 3/8 to 3/4 inch apart. The shoulder portion of front shall be left open to accommodate shoulder pad.	304		4-8	70-2	70-2	
	i. Steam shrink fronts and press dry to conform to shape of body.						
4.	Make type III fronts.						
	a. Spread shoulder dart on front and stitch to wedge piece with the edges overlapped. Marks on wedge piece pattern show spread of dart.	304		4-8	70-2	70-2	
	b. Abut or overlap 1/8 inch the edges of the armhole dart on front section and stitch through the polyester and cotton cloth stays with stays on the outer side. The abutted or overlapped edges may be stitched together prior to stitching through stay pieces.	304	FSa-1 or LSa-1	4-8	70-2	70-2	
	c. Overlap the edge of the armhole dart 1/8 inch on chest piece and stitch together.	304	LSa-1	4-8	70-2	70-2	
	or						
	d. Abut the edges of the armhole dart and stitch through the polyester and cotton cloth stay piece. (The abutted edges maybe stitched together prior to stitching through stay.)	304	LSa-1	4-8	70-2	70-2	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

TABLE III. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
4.	Make type III fronts. (cont'd)						
	e. Position chest piece on underside of front section in accordance with marks on pattern. Stitch together along front and bottom edge of chest piece. Place an additional row through center of chest piece front section.	304		4-8	70-2	70-2	
	f. Spread shoulder dart on chest piece and stitch to spread dart of front section through the wedge piece.	304		4-8	70-2	70-2	
	g. Position padding on chest piece with the padding extending beyond the shoulder, armhole, and side of front section. Quilt all plies together with the rows of stitching 3/8 to 3/4 inch apart. The shoulder portion of front shall be left open to accommodate shoulder pad.	304		4-8	70-2	70-2	
	h. Steam shrink and press dry to conform to shape of body.						
5.	Make types IV and XVI fronts.						
	a. Abut or overlap 1/8 inch front and side front and stitch through the polyester and cotton cloth stay piece with stay on the outer side. The abutted or overlapped edges may be stitched prior to stitching through stay piece.	304	FSa-1 or LSa-1	4-8	70-2	70-2	
	b. Position shoulder piece and shoulder padding to underside of coat front in accordance with marks on pattern, with the shoulder piece between front section and shoulder padding. Quilt all plies together with rows of stitching 3/8 to 3/4 inch apart.	304		4-8	70-2	70-2	

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

TABLE III. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
5.	Make types IV and XVI fronts. (cont'd)						
	c. Steam shrink fronts and press dry to conform to shape of body.						
6.	Make type VI fronts.						
	a. Spread shoulder dart on front section and stitch wedge piece with the edges overlapped. Notches on wedge piece pattern part show spread of dart.	304		4-8	70-2	70-2	
	b. Overlap 1/4 inch and stitch the edges of the armhole dart and the edges of the waist dart on front section. Stitch the polyester and cotton cloth stay on outer side with stay covering the armhole and waist dart seams. The horizontal cut step shall not be stitched.	304	FSa-1 or LSa-1	4-8 4-8	70-2 70-2	70-2 70-2	
	c. Overlap the edge of the armhole dart 1/4 inch on chest piece and stitch together.	304	LSa-1	4-8	70-2	70-2	
	d. Position shoulder piece on underside of front 1/2 inch below top edge of front and 1/2 inch in back of breakline on front. The breakline is indicated by marks on pattern. Stitch together, down center of shoulder piece to bottom edge and up diagonally to a point 1 inch from gorge.	304		4-8	70-2	70-2	
	e. Position chest piece on underside of front 1/4 inch below top edge of front in line with notch in top front corner and pattern marks on front (breakline). Stitch to front with the first row of stitching along front edge of chest piece and the second row approximately 3/8 inch from front edge.	304		4-8	70-2	70-2	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

TABLE III. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
6.	Make type VI fronts. (cont'd)						
	Spread the wedge opening of chest piece 5/8 to 3/4 inch apart and stitch six additional and parallel rows of stitching, each row being approximately 6 inches long and 3/8 inch apart. The last row of stitching shall end approximately 1 inch beyond the wedge opening.						
	f. Position chest padding on underside of front with top edges aligned and the top front corner of padding 1/4 inch in back of notch in top front corner of front. The back edge of padding shall extend 1/8 inch beyond edge of armhole and side seam. Starting at front edge, quilt all chest parts with stitching 3/8 to 3/4 inch apart and parallel to front edge of padding. The shoulder portion of the padding shall be left open to accommodate the shoulder pad.	304		4-8	70-2	70-2	
	g. Steam shrink front and press dry to conform to shape of body.						
7.	Make type VII fronts.						
	a. Abut or overlap 1/8 inch the front and side front sections in accordance with marks on pattern, and stitch together through the polyester and cotton cloth stay piece. The abutted or overlapped edges may be stitched together prior to stitching through stay.	304	FSa-1 or LSa-1	4-8	70-2	70-2	
	b. Abut or overlap 1/8 inch the front chest and side chest pieces and stitch together through the polyester and cotton cloth stay piece. The abutted	304	FSa-1 or LSa-1	4-8	70-2	70-2	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

NO.	TABLE III. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
7.	Make type VII fronts. (cont'd)						
	or overlapped edges may be stitched together prior to stitching through the stay piece.						
	c. Position and stitch haircloth shoulder piece to body with eight or nine rows of stitching perpendicular to the shoulder edge with the rows of stitching 3/8 to 3/4 inch apart.	304		4-8	70-2	70-2	
	d. Position the assembled chest section on the underside of the assembled body section in accordance with marks on pattern. Stitch together along front edge; cover the bottom edge of the piece with a 1 inch wide bias cut polyester and cotton cloth stay piece and stitch along both sides of the stay. The stay piece need not extend across the entire bottom edge provided the end of the stay is completely covered by the felt padding (see operation 7f).	304		4-8	70-2	70-2	
	e. Position the chest padding on the chest section with armhole edges aligned; insert a 2 by 5 inch bias cut polyester and cotton cloth stay under the front edge of the felt padding so that the long axis of the stay extends from the edge of shoulder downward. Stitch the felt padding to body section along front edge, catching the 2 by 5 inch stay piece in the stitching. Quilt the padded chest with the stitching 3/8 to 3/4 inch apart and parallel to the lengthwise edge. The quilting shall cover the 2 by 5 inch stay piece, the exposed part of the chest piece, and the lower part of the felt padding. The quilting on the felt padding shall not extend above an imaginary line running from the 2 by 5 inch stay to the underarm.	304		4-8	70-2	70-2	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

TABLE III. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
7.	Make type VII fronts. (cont'd)						
	f. Steam shrink front and press dry to conform to shape of body.						
8.	Make types IX and X fronts.						
	a. Spread shoulder dart on front section and stitch wedge piece with edges overlapped. Notches on wedge piece pattern part show spread of dart.	304		4-8	70-2	70-2	
	b. Position shoulder piece (haircloth) on underside of front 1/2 inch below top edge of front and 1/2 inch in back of breakline on front. The breakline is indicated by marks on pattern. Stitch together down center of shoulder piece to bottom edge and up diagonally to a point 1 inch from gorge.	304		4-8	70-2	70-2	
	c. Spread shoulder dart on chest piece and stitch to front through wedge piece. Notches on wedge piece pattern part show spread of dart.	304		4-8	70-2	70-2	
	d. Abut or overlap 1/8 inch the edge of the waist dart on the fronts and stitch together through dart stays of the basic material. The abutted or overlapped edges may be stitched together prior to stitching through stays.	304	FSa-1 or LSa-1	4-8	70-2	70-2	
	e. Position chest piece and chest padding on underside of body and quilt together all parts with vertical rows of stitching 3/8 to 3/4 inch apart. The padding shall extend beyond the armhole and the shoulder portion shall be left open to accommodate the shoulder pad.	304		4-8	70-2	70-2	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

TABLE III. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
8.	Make types IX and X fronts. (cont'd)						
	f. Steam shrink fronts and press dry to conform to shape of body.						
*9.	Make type XI fronts.						
	a. Spread shoulder dart on front sections and stitch wedge piece with edges overlapped. Notches on wedge piece pattern parts show spread of dart.	304	FSa-1 or LSa-1	4-8	70-2	70-2	
	b. Abut or overlap 1/8 inch of the edge of the neckline, waist, and lower armhole darts on the front sections and stitch together through the silesia dart stay. The abutted or overlapped edge may be stitched together prior to stitching through stay.	304	FSa-1 or LSa-1	4-8	70-2	70-2	
	c. Spread shoulder dart on haircloth chest piece parts and stitch wedge piece with edges overlapped. Notches on wedge piece pattern part show spread of dart.	304	FSa-1 or LSa-1	4-8	70-2	70-2	
	d. Abut or overlap 1/8 inch of the edge of the neckline and lower armhole darts on the haircloth chest piece and stitch together through the silesia dart stay. The abutted or overlapped edges may be stitched together prior to stitching through stay.	304	FSa-1 or LSa-1	4-8	70-2	70-2	
	e. Position the haircloth reinforcement piece at the top front corner of the coat front on the inner side of the body sections. Place the chest piece on top of the haircloth reinforcement; place the padding and the polyester and cotton cloth covering for the front edge on top of the chest piece. Quilt all parts together with vertical	304		4-8	70-2	70-2	

Source: https://assist.dla.mil -- Downloaded: 20240-18T05:27Z
Check the source to verify that this is the current version before use.

NO.	TABLE III. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
#9.	Make type XI fronts. (cont'd)						
	rows of stitching 3/8 to 3/4 inch apart and with curved rows toward the armhole. The padding shall extend beyond the armhole, and the shoulder portion shall be left open to accommodate the shoulder pads.						
	f. Place the polyester and cotton cloth covering over bottom edge of chest piece and stitch both edges of cover to fronts.	304		4-8	70-2	70-2	
	g. Steam shrink fronts and press dry to conform to shape of body.						
10.	Make type XII fronts.						
	a. Abut or overlap 1/8 inch the edges of the neck dart on the front and stitch through the polyester and cotton cloth stay piece. The abutted or overlapped edges may be a polyester and cotton cloth stay.	304	FSa-1 or LSa-1	4-8	70-2	70-2	
	b. Abut or overlap 1/8 inch the edges of the shoulder dart on the fronts and stitch together through the basic material stay piece. The abutted or overlapped edges may be stitched together prior to stitching through the stay.	304	FSa-1 or LSa-1	4-8	70-2	70-2	
	c. Abut or overlap 1/8 inch the edges of the shoulder dart on the chest piece and stitch together.	304	FSa-1 or LSa-1	4-8	70-2	70-2	
	d. Position chest piece and chest padding on inside of fronts in accordance with marks on pattern and	304		4-8	70-2	70-2	

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

TABLE III. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
10.	Make type XII fronts. (cont'd)						
	quilt all parts together with vertical rows of stitching 3/8 to 3/4 inch apart. The padding shall extend beyond the armhole, and the shoulder portion shall be left open to accommodate the shoulder pad.						
	e. Steam shrink fronts and press dry to conform to shape of body.						
11.	Make type XIII and XV fronts.						
	a. Abut or overlap the edges of front and side and stitch together through silesia stay piece with a 3/8 inch seam. The overlapped edges may be stitched together before stitching through stay piece.	304	FSa-1 or LSa-1	4-8	70-2	70-2	
	b. Steam shrink fronts and press dry to conform to shape of body.						
12.	Make type XIV fronts.						
	a. Abut or overlap 1/8 inch the front and side front sections in accordance with marks on pattern and stitch together through the polyester and cotton cloth stay piece. The abutted or overlapped edges may be stitched together prior to stitching through stay.	304	FSa-1 or LSa-1	4-8	70-2	70-2	
	b. Abut or overlap 1/8 inch the front chest and side chest pieces and stitch together through the polyester and cotton cloth stay piece. The abutted or overlapped edges may be stitched together prior to stitching through the stay pieces.	304	FSa-1 or LSa-1	4-8	70-2	70-2	

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

NO.	TABLE III. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
12.	Make type XIV fronts. (cont'd)						
	c. Position assembled chest section on assembled body sections back (with stays on the outer sides) in accordance with marks on pattern, simultaneously inserting bias cut haircloth shoulder piece at shoulder between body and chest sections. Stitch chest section on body section along edges and cover the entire area with rows of stitching, perpendicular to the shoulder edge, with rows of stitching 3/8 to 3/4 inch apart.	304		4-8	70-2	70-2	
	d. Position the chest padding on the chest section with armhole edges aligned. Stitch through all plies of material along the front contour and through the center of the felt chest padding.	304		4-8	70-2	70-2	
	e. Steam shrink front and press dry to conform to shape of body.						
13.	Make type XVII fronts.						
	a. Spread shoulder dart on front section and stitch wedge piece with the edges overlapped. Notches on wedge piece pattern part show spread of dart.	304		4-8	70-2	70-2	

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

NO.	TABLE III. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
13.	Make type XVII fronts. (cont'd)						
	b. Overlap 1/4 inch and stitch the edges of the armhole dart on front section. Stitch the polyester and cotton cloth stay on outer side with stay covering the armhole dart seam.	304	FSa-1 or LSa-1	4-8 4-8	70-2 70-2	70-2 70-2	
	c. Overlap the edge of the armhole dart 1/4 inch on chest piece and stitch together.						
	d. Position shoulder piece on underside of front 1/2 inch below top edge of front and 1/2 inch in back of breakline on front. The breakline is indicated by marks on pattern. Stitch together, down center of shoulder piece to bottom edge and up diagonally to a point 1 inch from gorge.	304		4-8	70-2	70-2	
	e. Position chest piece on underside of front 1/4 inch below top edge of front in line with notch in top front corner and pattern marks on front (breakline). Stitch to front with the first row of stitching along front edge of chest piece and the second row approximately 3/8 inch from front edge. Spread the wedge opening of chest piece 5/8 to 3/4 inch apart and stitch six additional and parallel rows of stitching, each row being approximately 6 inches long and 3/8 inch apart. The last row of stitching shall end approximately 1 inch beyond the wedge opening.	304		4-8	70-2	70-2	

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

NO.	TABLE III. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
13.	Make type XVII fronts. (cont'd)						
	f. Position chest padding on underside of front with top edges aligned and the top front corner of padding 1/4 inch in back of notch in top front corner of front. The back edge of padding shall extend 1/8 inch beyond edge of armhole and side seam. Starting at front edge, quilt all chest parts with stitching 3/8 to 3/4 inch apart and parallel to front edge of padding. The shoulder portion of the padding shall be left open to accommodate the shoulder pad.	304		4-8	70-2	70-2	
	g. Steam shrink front and press dry to conform to shape of body.						
14.	Make type XVIII fronts.						
	a. Position shoulder reinforcement piece to shoulder piece even at the shoulder line and approximately 1/8 inch behind neckline and front of the shoulder piece. Place the shoulder piece to the underside of chest piece approximately 1/8 inch behind shoulder line, neckline, and front. Quilt together above the dart as shown in figure 13.	304		4-8	70-2	70-2	
	b. Position quilted pieces with shoulder piece to chest padding and quilt all plies together with rows of stitching 3/8 to 3/4 inch apart and as shown on figure 13.	304		4-8	70-2	70-2	

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

NO.	TABLE III. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
15.	Make type XIX fronts.						
	a. Position shoulder piece on top of chest piece 1/2 inch below top edge and 1/2 inch in back of armhole edge. Stitch diagonally from point of shoulder to opposite point on lower edge of shoulder piece.	304	SSv	4-8	70-2	70-2	
	b. Position chest piece on underside of front (Shoulder piece against the front) 1/2 inch below the top edge and 1/2 inch in back of breakline on front. The breakline is indicated by pattern marks. Stitch with one row stitching, the front edge of chest piece to front from shoulder seam to lower edge. A second row shall be stitched approximately 1/2 inch from the first.	304	SSv	4-8	70-2	70-2	
	c. Position the chest padding on underside of front 1/2 inch behind front edge of chest piece. Top edges of felt and front should be aligned. Armhole and side seam edges of felt should extend slightly beyond armhole and side seam edges of front. Starting at the front edge, quilt all parts in chest area with rows of stitching 3/8 to 3/4 inch apart and parallel to the front edge of padding. The shoulder portion shall be left open to accommodate the shoulder pad.	304	SSv	4-8	70-2	70-2	
	d. Steam and shrink front and press dry and flat.						

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

TABLE III. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
16.	Make type XX fronts.						
	a. Stitch along shoulder dart of coat front body, overlapping edges 1/4 inch and tapering to a point as indicated by pattern marks.	304	LSa-1	4-8	70-2	70-2	
	b. Position felt coat front chest piece on coat front body, aligning shoulder edges. Armhole and side seam edges of felt should extend slightly beyond armhole and side seam edges of front. Starting at the front edge, quilt chest area parallel to front edge with stitching spaced 3/8 to 3/4 inch apart. The shoulder portion shall be left open to accommodate the shoulder pad.	304	SSv	4-8	70-2	70-2	
	c. Steam shrink/shape front and press dry.						
17.	Make type XXI fronts.						
	a. Position shoulder piece on top of felt chest piece, 1/2 inch below top edge and 1/2 inch in from armhole. Stitch diagonally from point on lower edge of shoulder piece to top corner of shoulder piece.	304	SSv-1	4-8	50	50	
	b. Position felt chest piece and shoulder piece on the underside (shoulder piece against coat front) with the top edge of felt even with the top of coat front and even with the armholes. Starting with the front edge, quilt all parts in chest area with 8 to 10 rows of stitching 3/8 to 3/4 inches apart. The shoulder portion shall be left open to accommodate the shoulder pad.	304	SSv-1	4-8	50	50	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

TABLE III. (cont'd)
MANUFACTURING OPERATIONS REQUIREMENTS

NO.		STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
17.	Make type XXI fronts. (cont'd)						
	c. Abut edges of dart, position bias-cut stay tape over dart and stitch tape on both edges of dart. The dart shall be zig-zagged from one edge of tape to the other.	304	SSv-1	4-8	50	50	
18.	Make type XXII fronts.						
	a. Spread shoulder dart on front section and stitch wedge piece with the edges overlapped. Notches on wedge piece pattern part show spread of dart.	304		4-8	70-2	70-2	
	b. Overlap 1/4 inch and stitch the edges of the armhole dart on front section. Stitch the polyester and cotton cloth stay on outer side with stay covering the armhole dart seam.	304	FSa-1 or LSa-1	4-8	70-2	70-2	
	c. Overlap the edge of the armhole dart 1/4 inch on chest piece and stitch together.						
	d. Position shoulder piece on underside of front 1/2 inch below top edge of front and 1/2 inch in back of breakline on front. The breakline is indicated by marks on pattern. Stitch together, down center of shoulder piece to bottom edge and up diagonally to a point 1 inch from gorge.	304		4-8	70-2	70-2	
	e. Position chest piece on underside of front 1/4 inch below top edge of front in line with notch in top front corner and pattern marks on front (breakline). Stitch to front with the first row of stitching along front edge of chest piece and the second row approximately 3/8 inch from front edge.	304		4-8	70-2	70-2	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

NO.	TABLE III. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
18.	Make type XXII fronts. (cont'd) Spread the wedge opening of chest piece 5/8 to 3/4 inch apart and stitch six additional and parallel rows of stitching, each row being approximately 6 inches long and 3/8 inch apart. The last row of stitching shall end approximately 1 inch beyond the wedge opening.						
19.	Make type XXIII fronts.						
	a. Spread shoulder dart on front section and stitch wedge piece with the edges overlapped. Notches on wedge piece pattern part show spread of dart.	304		4-8	70-2	70-2	
	b. Overlap 1/4 inch and stitch the edges of the armhole dart on front section. Stitch the polyester and cotton cloth stay on outer side with stay covering the armhole dart seam.	304	FSa-1 or LSa-1	4-8	70-2	70-2	
	c. Overlap the edge of the armhole dart 1/4 inch on chest piece and stitch together.						
	d. Position shoulder piece on underside of front 1/2 inch below top edge of front and 1/2 inch in back of breakline on front. The breakline is indicated by marks on pattern. Stitch together, down center of shoulder piece to bottom edge and up diagonally to a point 1 inch from gorge.	304		4-8	70-2	70-2	
	e. Position chest piece on underside of front 1/4 inch below top edge of front in line with notch in top front corner and pattern marks on front (breakline). Stitch to front with the first row of	304		4-8	70-2	70-2	

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

NO.	TABLE III. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
19.	Make type XXIII fronts. (cont'd) stitching along front edge of chest piece and the second row approximately 3/8 inch from front edge. Spread the wedge opening of chest piece 5/8 to 3/4 inch apart and stitch six additional and parallel rows of stitching, each row being approximately 6 inches long and 3/8 inch apart. The last row of stitching shall end approximately 1 inch beyond the wedge opening.						
20.	Make type XXIV fronts.						
	a. Stitch along shoulder dart of coat front body, overlapping edges 1/4 inch and tapering to a point as indicated by pattern marks.	304	LSa-1	4-8	70-2	70-2	
	b. Position felt coat front chest piece on coat front body, aligning shoulder edges. Armhole and side seam edges of felt should extend slightly beyond armhole and side seam edges of front. Starting at the front edge, quilt chest area parallel to front edge with stitching spaced 3/8 to 3/4 inch apart. The shoulder portion shall be left open to accommodate the shoulder pad.	304	SSv	4-8	70-2	70-2	
	c. Steam shrink/shape front and press dry.						
*21.	Make type XXV chest piece.						
	a. Spread shoulder dart on chest piece interlining and stitch to wedge piece with the edges overlapped. Marks on shoulder wedge piece show spread of dart.	304	-	4-8	70-2	70-2	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

TABLE III. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
*21.	Make type XXV chest piece. (cont'd)						
	b. Position shoulder piece interlining on underside of chest piece interlining in accordance with marks on pattern. Stitch together around shoulder wedge stitching to bottom of shoulder piece interlining and back to top of chest piece interlining.	304	-	4-8	70-2	70-2	
	c. Position shoulder piece felt over shoulder piece interlining in accordance with marks on pattern. Stitch to chest piece interlining along inside front and bottom edge. At outside edge turn back towards inside, and stitch 1/2 inch away from first row of stitching.	304	-	4-8	70-2	70-2	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 74 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

3.7 Workmanship. The fronts shall conform to the quality of product established by this specification.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.1.2 Responsibility for dimensional requirements. Unless otherwise specified in the contract or purchase order, the contractor is responsible for ensuring that all specified dimensions have been met. When dimensions cannot be examined on the end item, inspection shall be made at any point, or at all points in the manufacturing process necessary to ensure compliance with all dimensional requirements.

4.1.3 Certificates of compliance. When certificates of compliance are submitted, the Government reserves the right to inspect such items to determine the validity of the certification.

* 4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).

* 4.3 First article inspection. When a first article is required (see 3.1 and 6.2), it shall be examined for the defects specified in 4.4.2.

4.4 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be performed in accordance with MIL-STD-105.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

4.4.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced documents unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

4.4.1.1 Component and material certification. A certificate of compliance may be acceptable as evidence that the characteristics listed in table IV conform to the specified requirements, when tested by the specified methods.

TABLE IV. Component and materials tests

Component or material	Characteristic	Requirement paragraph	Test method
Haircloth (or alternate for type VI only)	Material identification	3.3.2	-
	Yarns per inch	3.3.2	5050 1/
	Weight	3.3.2	5041 1/
	Sizing content (haircloth only)	3.3.2	2611 1/
	Stiffness (alternate only)	3.3.2	5202 1/

1/ FED-STD-191

* 4.4.2 End item visual examination. The end items shall be examined for the defects listed in table V. The lot size shall be expressed in units of pairs of coat fronts. The sample unit shall be one pair of coat fronts. The inspection level shall be S-4 and the acceptable quality level (AQL), expressed in terms of defects per hundred units, shall be 10.

TABLE V. End item visual defects

Examine	Defect
General:	
Material defects and damages	Hole, cut, tear, smash, burn, drill hole, scorched area, or open place
	Permanent crease on lapel part

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

TABLE V. End item visual defects (cont'd)

Examine	Defect
General: (cont'd)	
Cleanness	Ink, oil, grease spot, or stain
Component and assembly	Any component part or required operation omitted or added (unless otherwise indicated herein) Any operation not performed as specified
Cutting	Any component part not cut in accordance with directional lines indicated on pattern or in accordance with specification requirements
Pressing	Omitted on one or both fronts, or not pressed to conform to shape of body
Seams and stitching	Part of front caught in an unrelated operation or stitching Any part badly pleated or puckered in stitching
Stitches missing or broken	More than 1 inch in length in one or more places
Seam or stitch type	Wrong seam or stitch type
Stitch tension	Loose tension resulting in a loose seam on major portion of seam Tight tension on major portion of seam (stitches break when normal strain is applied in the direction of the seam or stitching)
Stitches per inch	Less than minimum or more than maximum specified (To be scored only when condition exists on major portion of seam)
Size marking	Missing, incorrect, or illegible on one or both fronts Not located on lower end of each left and right front Lettering and numerals less than 1/2 inch in height

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

TABLE V. End item visual defects (cont'd)

Examine	Defect
General: (cont'd)	
Identification marking (applicable when coat fronts are purchased directly by the Government)	Missing, incorrect, or illegible on one or both fronts Not located directly above size marking Lettering and numerals less than 1/4 inch in height
Pairing (all types)	Two rights or two lefts paired Different sizes paired
Type I fronts:	
Shoulder darts	One or more not spread open One or both wedge pieces omitted One or both darts on chest piece not stitched through wedge piece and front
Armhole and waist darts	Edges of one or more darts not abutted or overlapped (as required) One or more stay pieces omitted Stitching not caught through stay on major portion of one or more darts
Chest piece	Not properly positioned Vertical row of stitching through center of chest piece omitted Stitching on front or bottom edge omitted
Padding	Not extended beyond shoulder, armhole, and side of front Rows of stitching less than 3/8 inch or more than 3/4 inch apart Shoulder portion not left open to accommodate shoulder pad
Type III fronts:	
Shoulder darts	One or more not spread open One or both wedge pieces omitted One or both darts on chest piece not stitched through wedge piece and front

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:27Z
Check the source to verify that this is the current version before use.

TABLE V. End item visual defects (cont'd)

Examine	Defect
Type III fronts: (cont'd)	
Chest darts	Edges of dart not abutted or overlapped as specified Stay pieces omitted Stitching not caught through stay on major portion of one or more darts
Chest piece	Not properly positioned Vertical row of stitching through center of chest piece omitted Stitching on front or bottom edge omitted
Padding	Not extended beyond shoulder, armhole, and side of front Rows of stitching less than 3/8 inch or more than 3/4 inch apart Shoulder portion not left open to accommodate shoulder pad
Type IV fronts:	
Front and side front	Not abutted or overlapped as specified Stitching not caught through stay piece on major portion of one or both seams Stay omitted on one or both seams
Front shoulder piece and shoulder padding	Shoulder piece or shoulder padding omitted on one or both fronts Not properly positioned Rows of stitching less than 3/8 or more than 3/4 inch apart
Type VI fronts:	
Front	Darts not overlapped as specified Stay tape omitted Stitching not caught through stay tape on more than half the length of seam Waist dart step stitched

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

TABLE V. End item visual defects (cont'd)

Examine	Defect
Type VI fronts: (cont'd)	
Shoulder piece	Omitted Not properly positioned Not inserted between front and chest piece
Chest piece	Not properly positioned Spread of wedge opening not as specified Position, length or gage of one or more rows of stitching not as specified
Padding	Not positioned properly Rows of stitching less than 3/8 inch or more than 3/4 inch apart Shoulder portion not left open to accommodate shoulder pad
Type VII fronts:	
Front and side front	Not abutted or overlapped as specified Stitching not caught through stay piece on major portion of one or both seams Stay omitted on one or both seams
Chest piece	Not properly positioned Bias cut haircloth shoulder piece omitted Bias cut haircloth shoulder piece not inserted at shoulder between body and chest section Chest piece not quilted to front Stay omitted on bottom edge of chest piece Stay on bottom edge of chest piece not stitched on both sides
Padding	Not positioned on chest piece with armholes aligned Bias cut 2 by 5-inch stay omitted Bias cut 2 by 5-inch stay not positioned as specified Rows of stitching less than 3/8 inch or more than 3/4 inch apart Shoulder portion not left open to accommodate shoulder pad

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

TABLE V. End item visual defects (cont'd)

Examine	Defect
Types IX and X fronts:	
Shoulder and waist darts	Not abutted or overlapped as specified Not stitched through basic material dart stays
Chest piece and chest padding	Chest piece omitted Chest piece and chest padding not placed on underside of body part Rows of stitching less than 3/8 inch or more than 3/4 inch apart
Type XI fronts:	
Shoulder and waist dart	Edges not abutted or overlapped as specified Not stitched through polyester and cotton cloth dart stays
Chest piece and chest padding	Chest piece omitted Haircloth reinforcement at top front of body sections omitted Polyester and cotton cloth covering at top front edge of body section omitted Rows of stitching less than 3/8 inch or more than 3/4 inch apart Polyester and cotton cloth covering at bottom edges of chest piece omitted Padding not extending beyond the armhole Shoulder portion not left open to accommodate shoulder pad
Type XII fronts:	
Neck dart	Edges not abutted or overlapped as specified Not stitched through dart stay
Shoulder dart	Edges not abutted or overlapped as specified Not stitched through basic material dart stay
Chest piece and padding	Padding not extended beyond the armhole Rows of stitching less than 3/8 inch or more than 3/4 inch apart Shoulder portion not left open to accommodate shoulder pad

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:27Z
Check the source to verify that this is the current version before use.

TABLE V. End item visual defects (cont'd)

Examine	Defect
Types XIII and XV fronts:	
Front and side front	Edges of front and side front not abutted or overlapped as specified Not stitched through stay
Chest piece and padding	Chest piece omitted Not stitched to the inside of coat fronts Rows of stitching less than 3/8 inch or more than 3/4 inch apart
Type XIV fronts:	
Front and side front	Not abutted or overlapped as specified Stitching not caught through stay piece on major portion of one or both seams Stay omitted on one or both seams
Chest piece	Not properly positioned Shoulder piece omitted or not inserted at shoulder between body and chest section Chest piece not quilted to front Stay omitted on bottom edge of chest piece Stay on bottom edge of chest piece not stitched on both sides
Padding	Not positioned on chest piece with armholes aligned Not stitched to chest piece along contour and through the padding
Type XVI fronts:	
Front and side front	Not abutted or overlapped as specified Stitching not caught through stay piece on major portion of one or both seams Stay omitted on one or both seams
Shoulder piece	Not properly positioned or omitted Not quilted as specified
Padding	Not as specified or omitted

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

TABLE V. End item visual defects (cont'd)

Examine	Defect
Type XVII fronts:	
Front	Dart not overlapped as specified Stay tape omitted on dart Stitching not caught through stay tape on more than half the length of tape
Shoulder piece	Omitted Not properly positioned Not inserted between front and chest piece
Chest piece	Not properly aligned Spread of wedge opening not as specified Position, length, or gage of one or more rows of stitching not as specified
Padding	Not positioned properly Rows of stitching less than 3/8 inch or more than 3/4 inch apart Shoulder portion not left open to accommodate shoulder pad
Type XVIII fronts:	
Chest piece	Not properly positioned Shoulder reinforcement piece or shoulder piece omitted Position, length, or gage of one or more rows of stitching not as specified
Padding	Not positioned properly Position, length, or gage of one or more rows of stitching not as specified
Type XIX fronts:	
Chest piece	Not properly positioned or omitted Shoulder piece not properly positioned or omitted Not quilted or stitched as directed
Chest padding	Not properly positioned or omitted Not quilted or stitched as directed

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

TABLE V. End item visual defects (cont'd)

Examine	Defect
Type XX fronts:	
Chest padding	Not properly positioned or omitted Not quilted or stitched as directed
Types XXI, XXII, and XXIII fronts:	
Front	Wedge piece omitted (types XXII and XXIII only) Stay omitted (type XXI only)
Chest piece	Not properly positioned or omitted Shoulder piece not properly positioned or omitted Not quilted or stitched as directed
Chest padding	Not properly positioned or omitted Not quilted as directed
Type XXIV fronts:	
Chest piece	Not properly positioned or omitted Not quilted or stitched as directed
Chest padding	Not properly positioned or omitted Not quilted or stitched as directed
Type XXV fronts:	
Chest piece	Wedge piece omitted Spread of wedge opening not as specified Shoulder piece interlining not properly positioned or omitted
Shoulder piece felt	Not positioned properly Rows of stitching not as specified or less than 3/8 or more than 3/4 inch apart

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:27Z
Check the source to verify that this is the current version before use.

* 4.4.3 Packaging examination. The fully packaged end items shall be examined for the defects listed below. The lot size shall be expressed in units of shipping containers. The sample unit shall be one shipping container fully packaged. The inspection level shall be S-2 and the AQL, expressed in terms of defects per hundred units, shall be 2.5.

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application
Materials	Any component missing, damaged, or not as specified
Workmanship	Inadequate application of components, such as incomplete sealing or closure of flap, improper taping, loose strapping, or inadequate stapling Bulged or distorted container
Content	Number per container is more or less than required Net weight exceeds maximum specified

* 4.4.4 Palletization examination. The fully packaged and palletized end items shall be examined for the defects listed below. The lot size shall be expressed in units of palletized unit loads. The sample unit shall be one palletized unit load, fully packaged. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5.

Examine	Defect
Finished dimensions	Length, width, or height exceeds specified maximum requirement
Palletization	Pallet pattern not as specified Interlocking of loads not as specified Load not bonded as specified
Weight	Exceeds maximum load limits
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application

Source: https://assist.dla.mil -- Downloaded: 202640-18T05:27Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or Commercial as specified (see 6.2).

5.1.1 Level A preservation. Twenty pairs of fronts of one type and size only shall be neatly stacked, with every five pairs reversed, and securely tied with cotton tape or twine.

5.1.2 Commercial preservation. Fronts shall be preserved in accordance with ASTM D 3951.

5.2 Packing. Packing shall be level B or Commercial as specified (see 6.2).

5.2.1 Level B packing. Fronts of one type and size only, preserved as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC-L, type CF (variety SW) or SF, class domestic, grade 275 of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class domestic, variety DW, grade 275 of PPP-B-636. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to A-A-203. Each shipping container shall be closed in accordance with method II as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.4.3. The weight of contents of each shipping container shall not exceed 65 pounds.

5.2.2.1 Weather-resistant fiberboard containers. When specified (see 6.2), the shipping container shall be grade V3c, V3s, or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with method III as specified in the appendix of the container specification, except that the inspection shall be in accordance with 4.4.3.

5.2.3 Commercial packing. Fronts, preserved as specified in 5.1, shall be packed in accordance with ASTM D 3951.

5.3 Palletization. When specified (see 6.2), fronts, packed as specified in 5.2, shall be palletized on a 4-way entry pallet in accordance with load type Ia of MIL-STD-147. Pallet type shall be type I (4-way entry), type IV, or type V in accordance with MIL-STD-147. Pallets shall be fabricated from wood groups I, II, III, or IV of MIL-STD-731. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means C and D or film bonding means F or G. Pallet pattern shall be number 3 in accordance with the appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course.

5.4 Marking. In addition to any special marking required by the contract or purchase order, unit packs, shipping containers, and palletized unit loads shall be marked in accordance with MIL-STD-129 or ASTM D 3951, as applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The fronts are intended for use as interlinings for dress clothing for male and female personnel of the Department of Defense.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of this specification.
b. Type and size required (see 1.2 and note below).
c. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1 and 2.2).
d. When a first article is required (see 3.1, 4.3, and 6.3).
e. Availability of patterns (see 3.4.3 and 3.4.4).
f. Levels of preservation and packing (see 5.1 and 5.2).
g. When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).
h. When palletization is required (see 5.3).

NOTE: Types I, III, IV, XVIII, and XXV for Army clothing; types VI, VII, XIV, XVI XIX, XX, and XXIV for Navy clothing; types IX through XIII and XV for Marine Corps clothing; and types XVII, XXI, XXII and XXIII for Coast Guard clothing.

6.3 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of FAR 52.209. The first article should be a preproduction sample. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should also include specific instructions in acquisition documents regarding arrangements for selection, inspection, and approval of the first article.

6.4 Sample. For access to samples, address the contracting activity issuing the invitation for bids or request for proposal.

6.5 Subject term (key word) listing.

Clothing components
Dress clothing
Interlinings
Men's clothing
Overcoats
Women's clothing

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

6.6 Changes from previous issue. The margins of this specification are marked with asterisks to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:

Army - GL
Navy - NU

Review activities:

Army - MD
Navy - MC, CG
DLA - CT

Preparing activity:

Army - GL

(Project 8315-0343)

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:27Z
Check the source to verify that this is the current version before use.

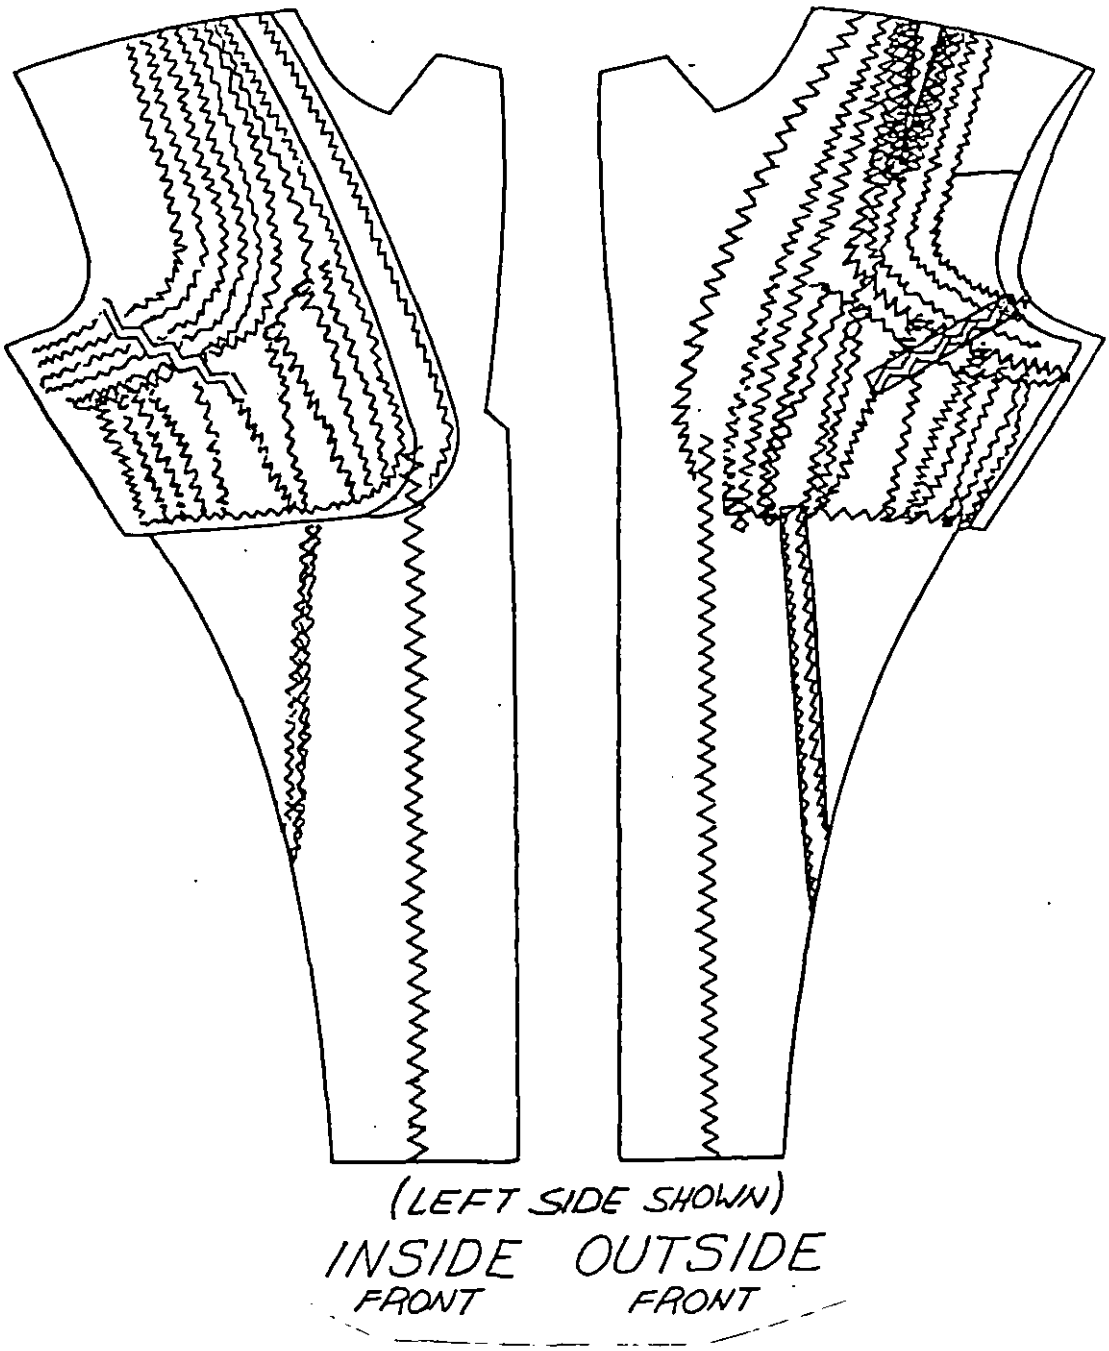


FIGURE 1. Coat front, type I for coats, men's tropical and serge, polyester/wool, Army Green 344 (ARMY).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

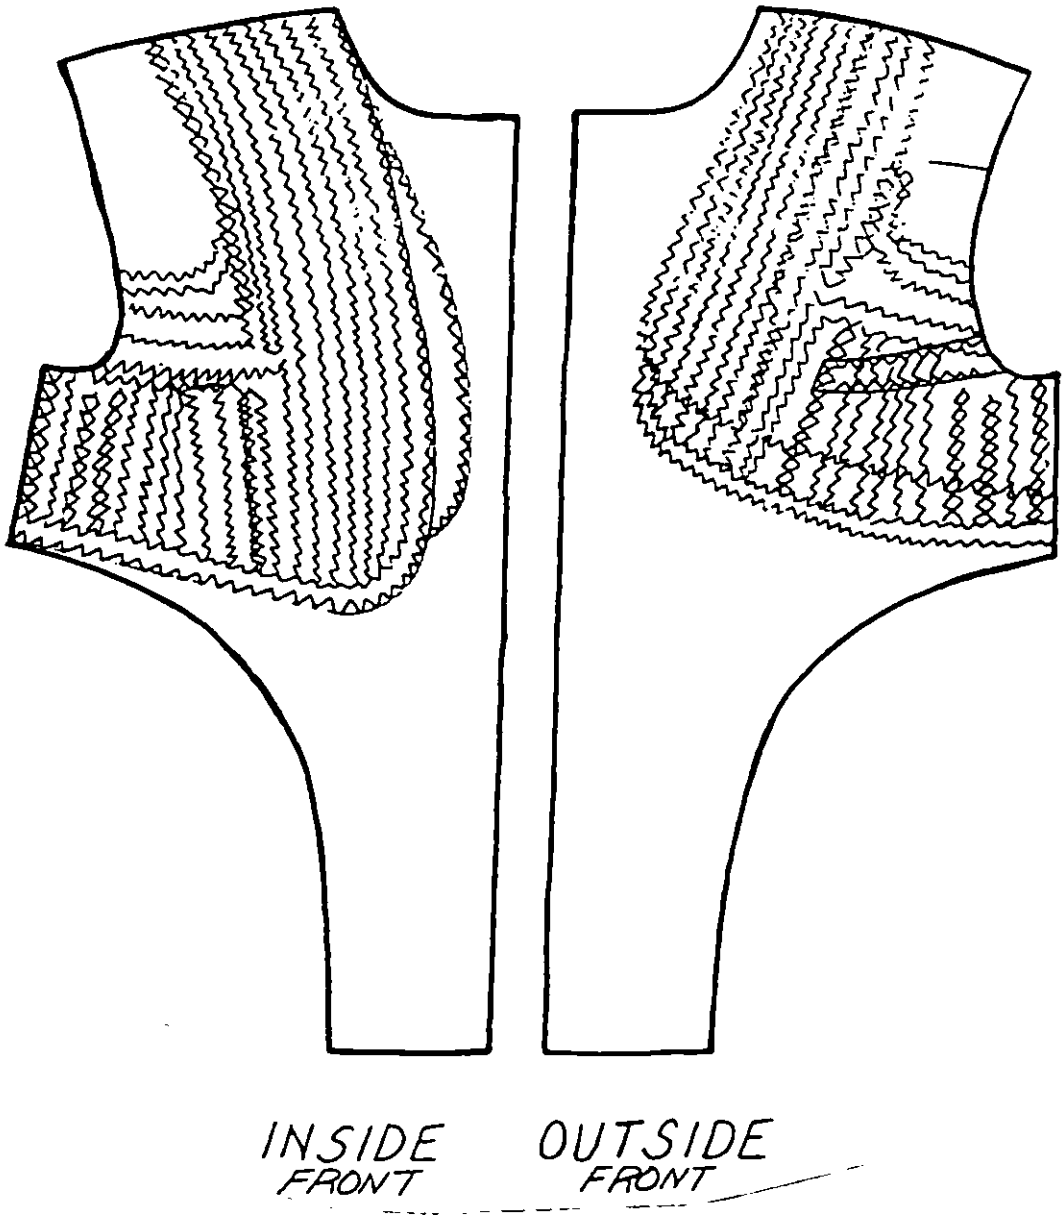


FIGURE 2. Coat front, type III for overcoat, man's, Army Green 44, with removable liner (ARMY).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

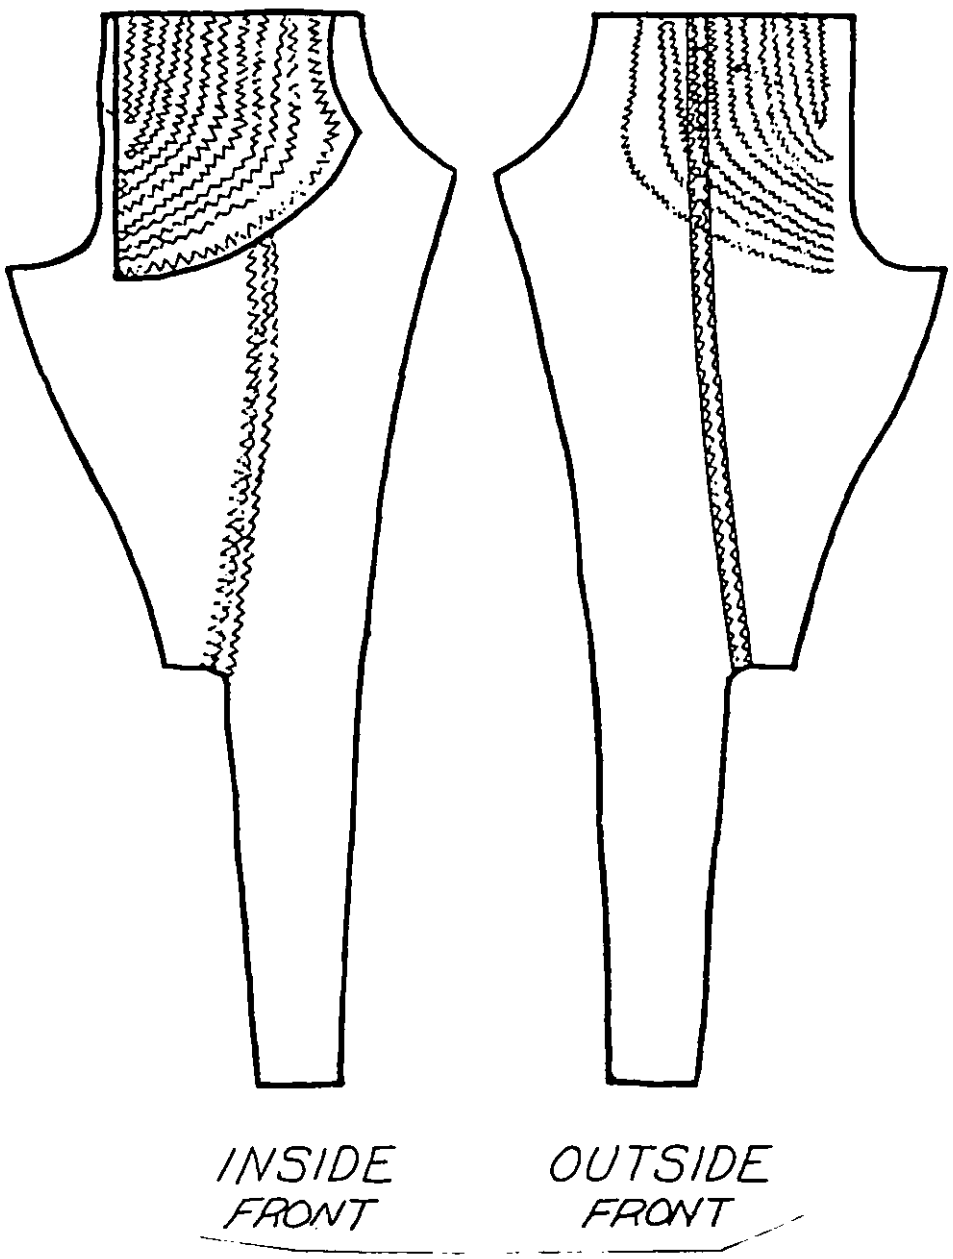


FIGURE 3. Coat front; type IV for coats, women's, wool and polyester/wool (ARMY).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

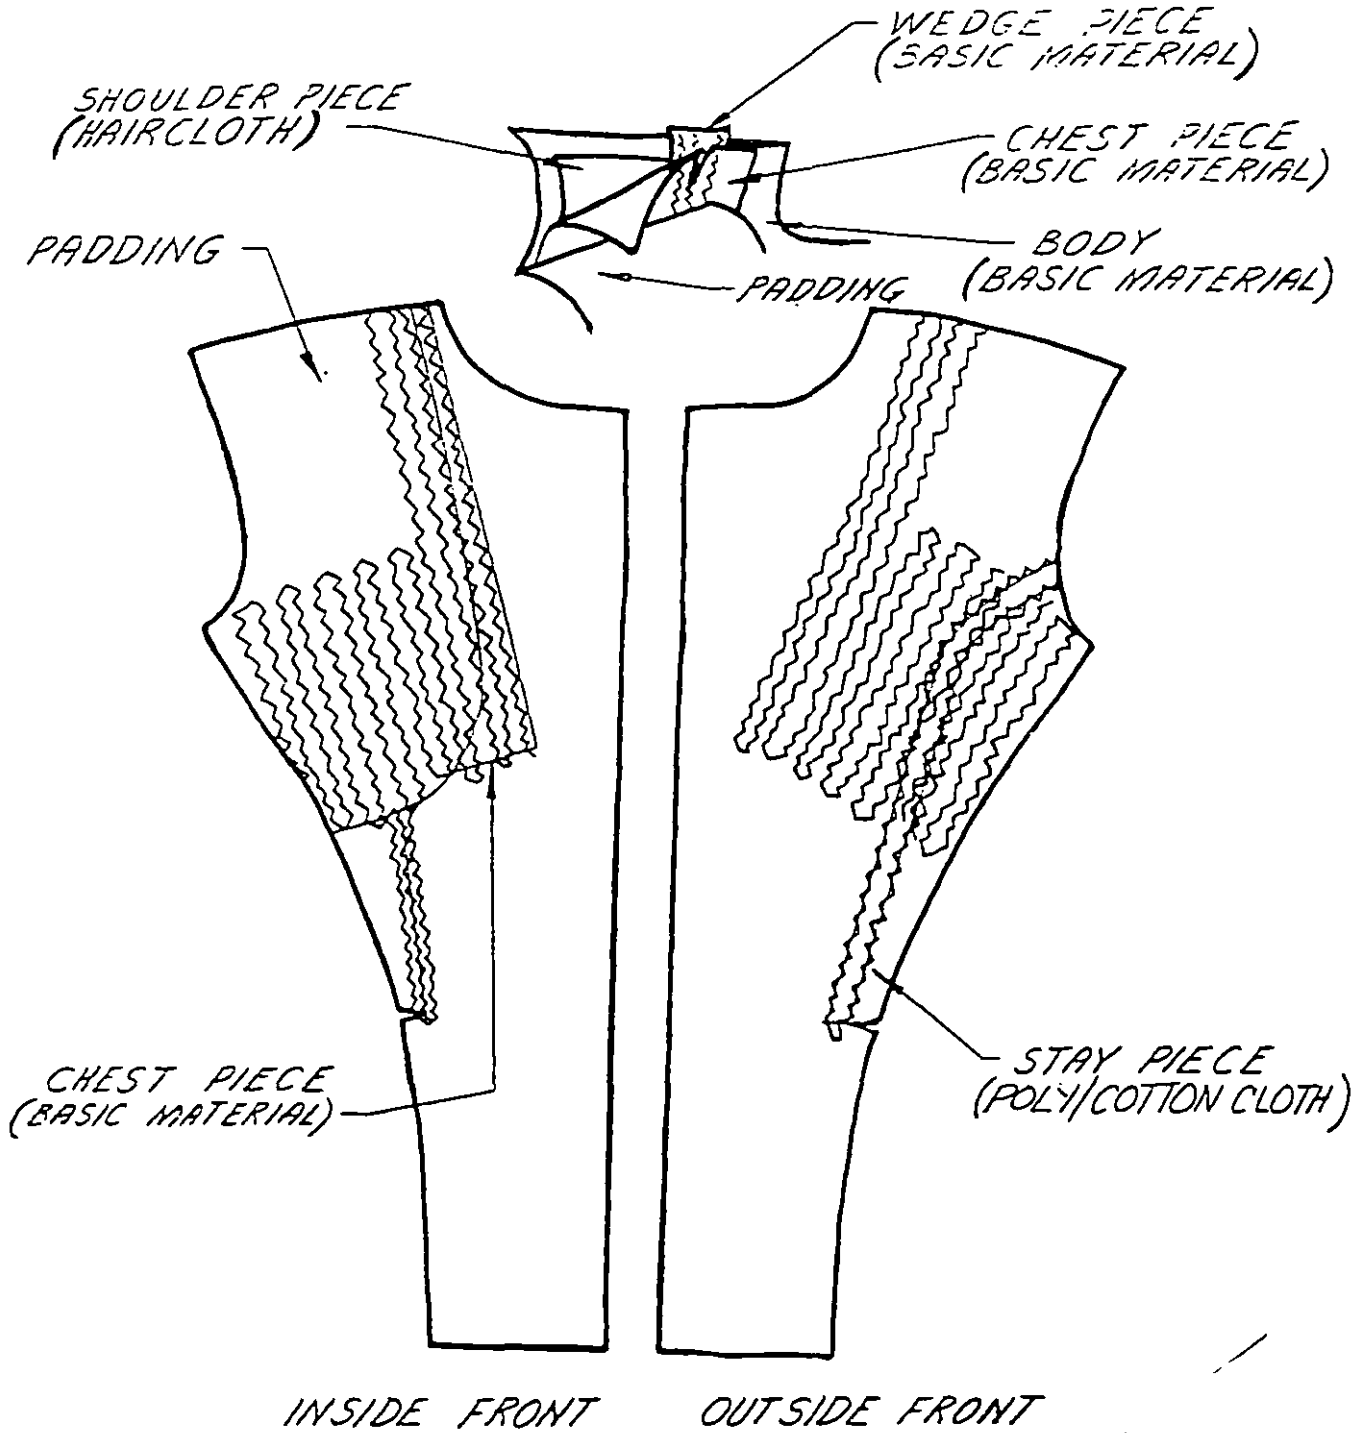


FIGURE 4. Coat front, type VI, for coat, man's, polyester/wool coat, man's, wool, winter (NAVY).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

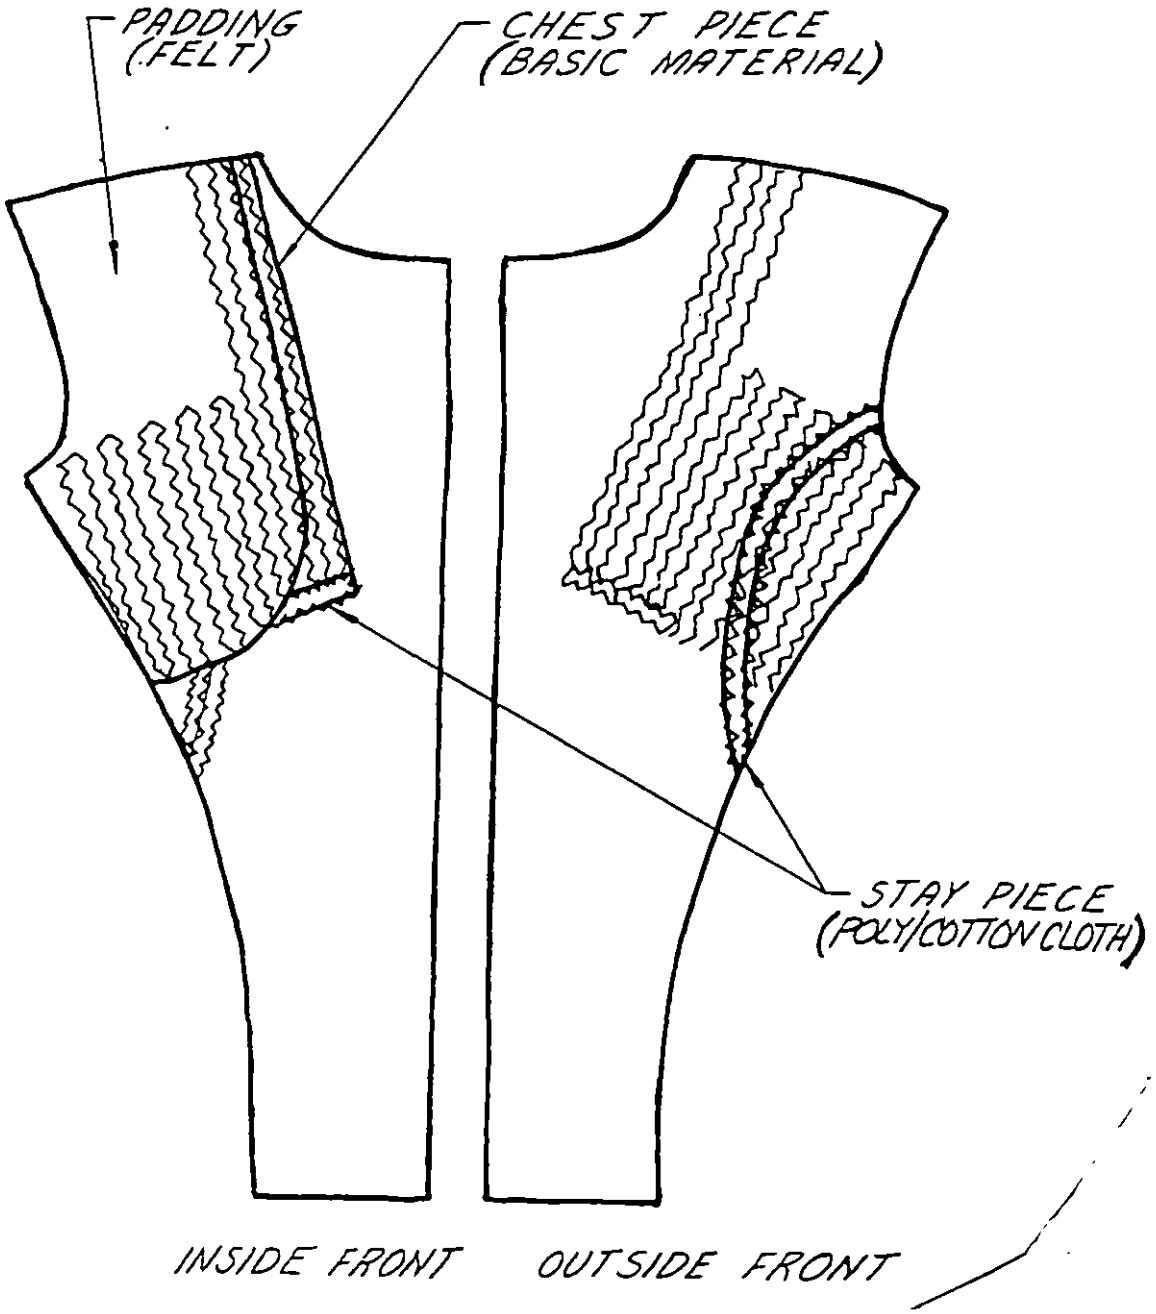


FIGURE 5. Coat front, type VII for uniform, man's, aviation working (green) (single-breasted) (NAVY).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

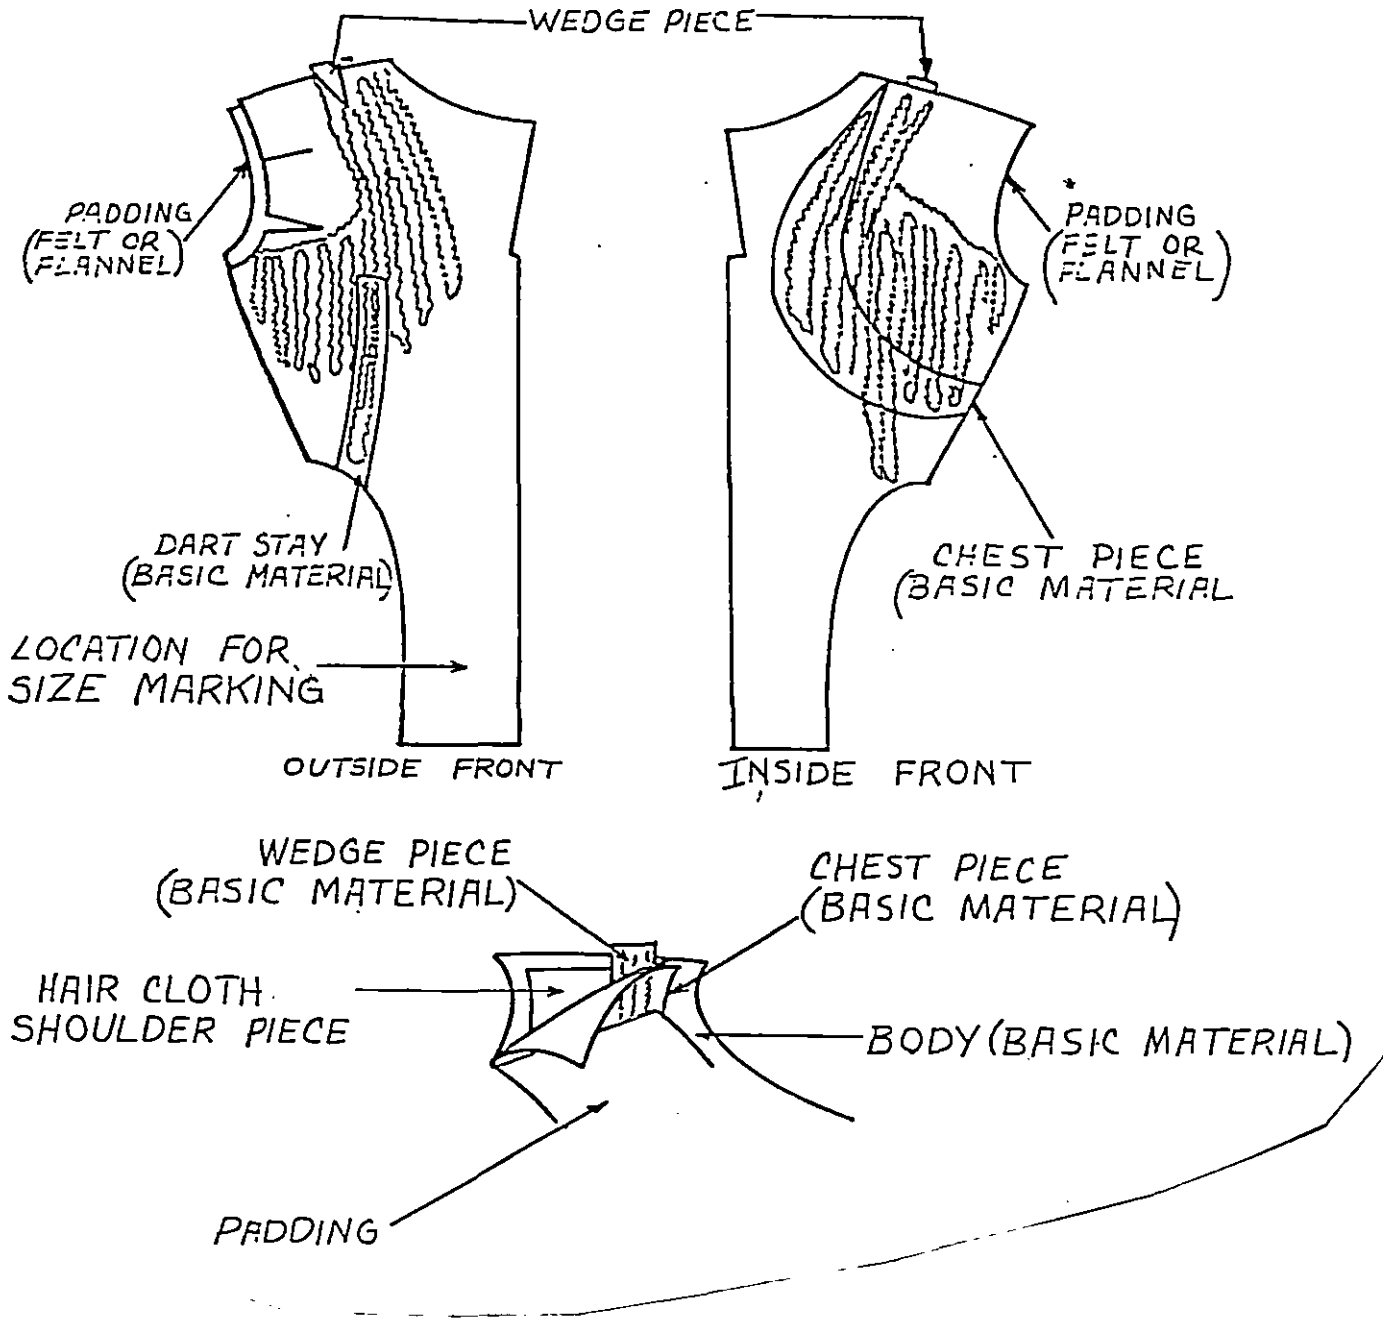


FIGURE 6. Coat fronts, types IX and X for coats, man's, service (with belt) (MARINE CORPS).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

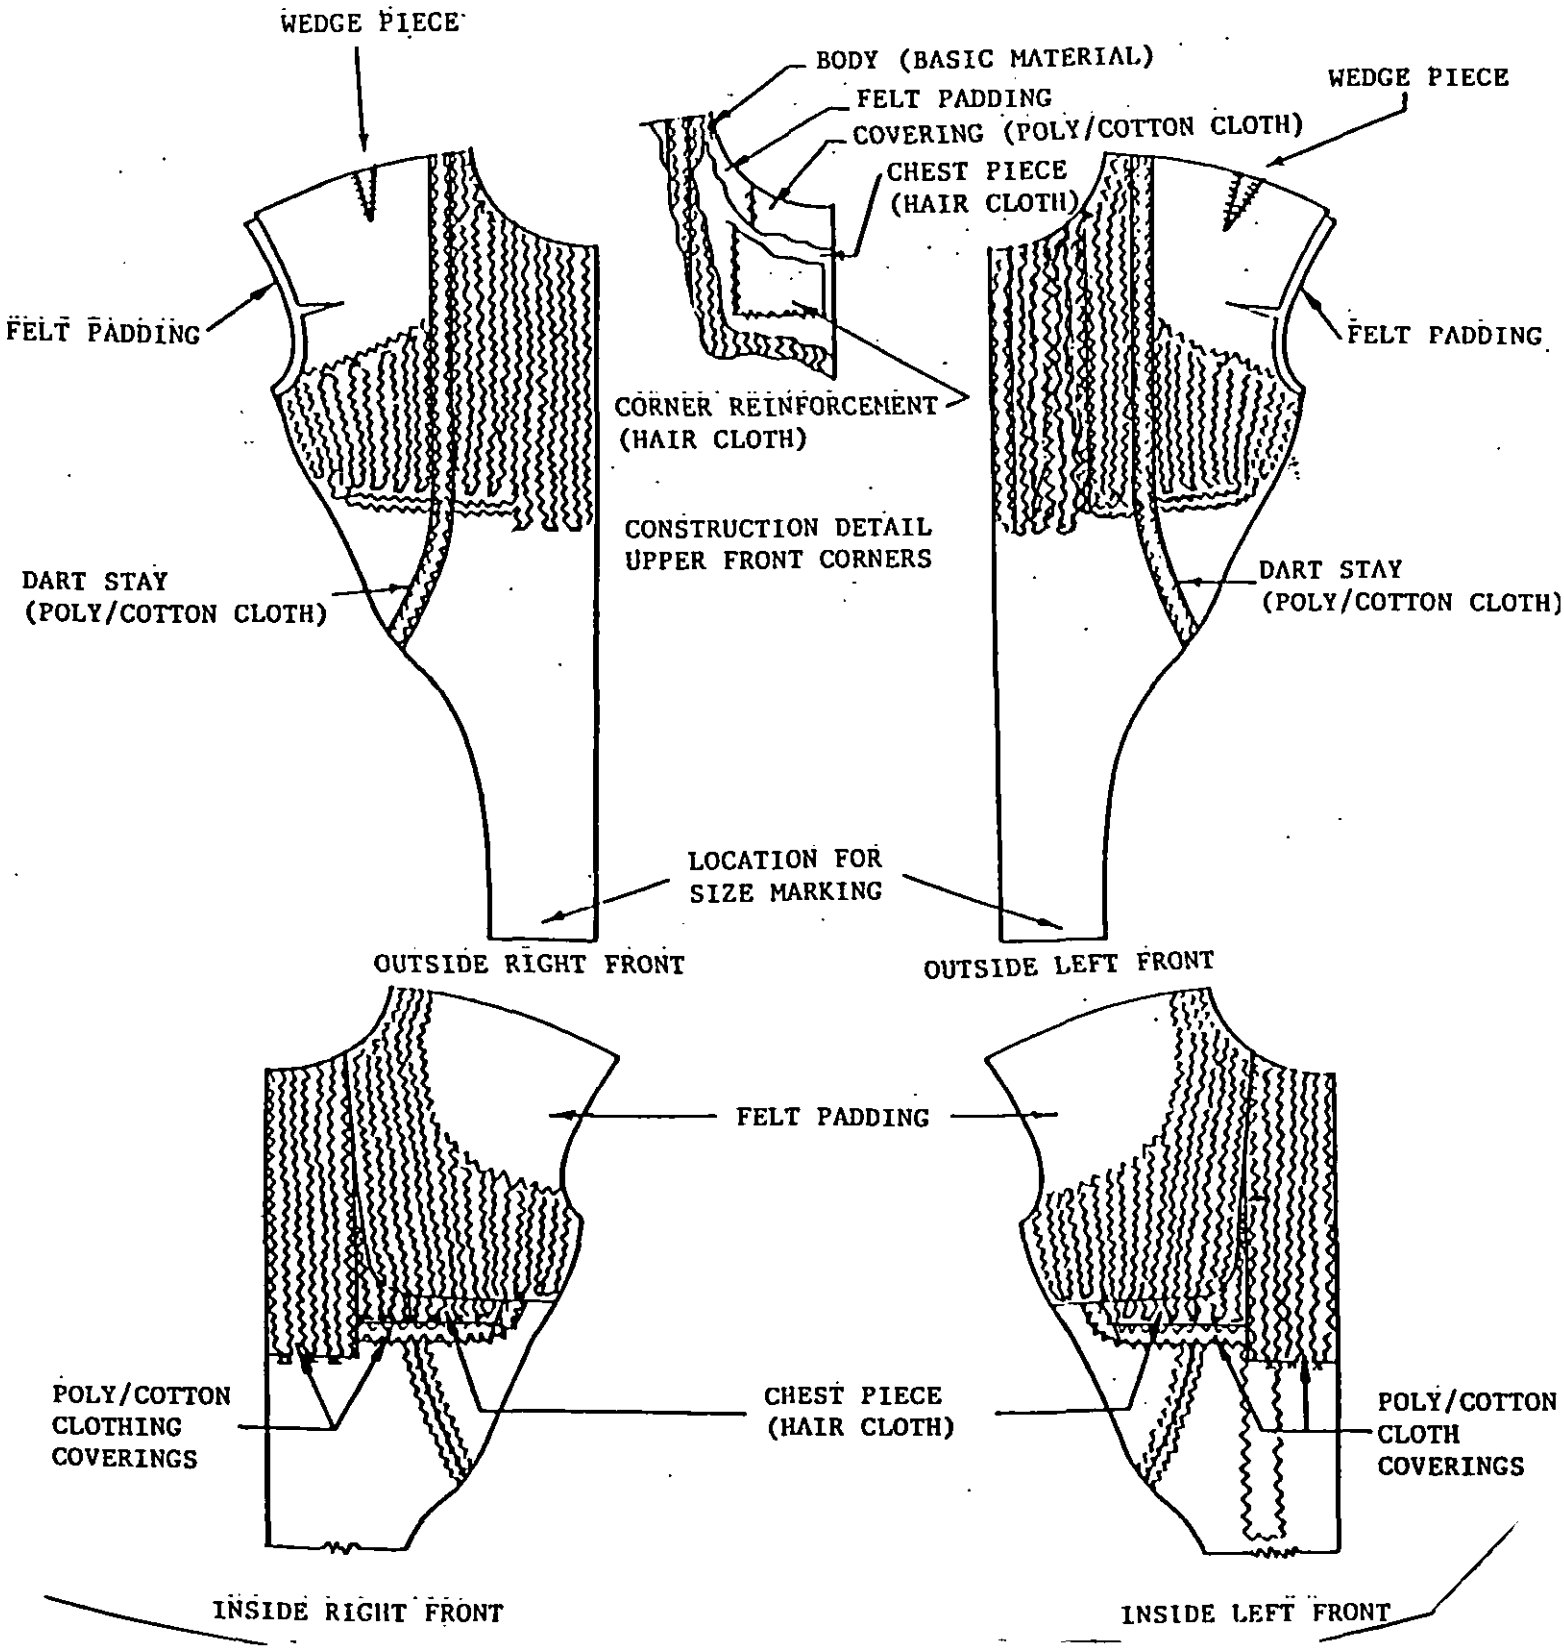


FIGURE 7. Coat front: type XI, for coat, man's, wool gabardine, blue dress (MARINE CORPS).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

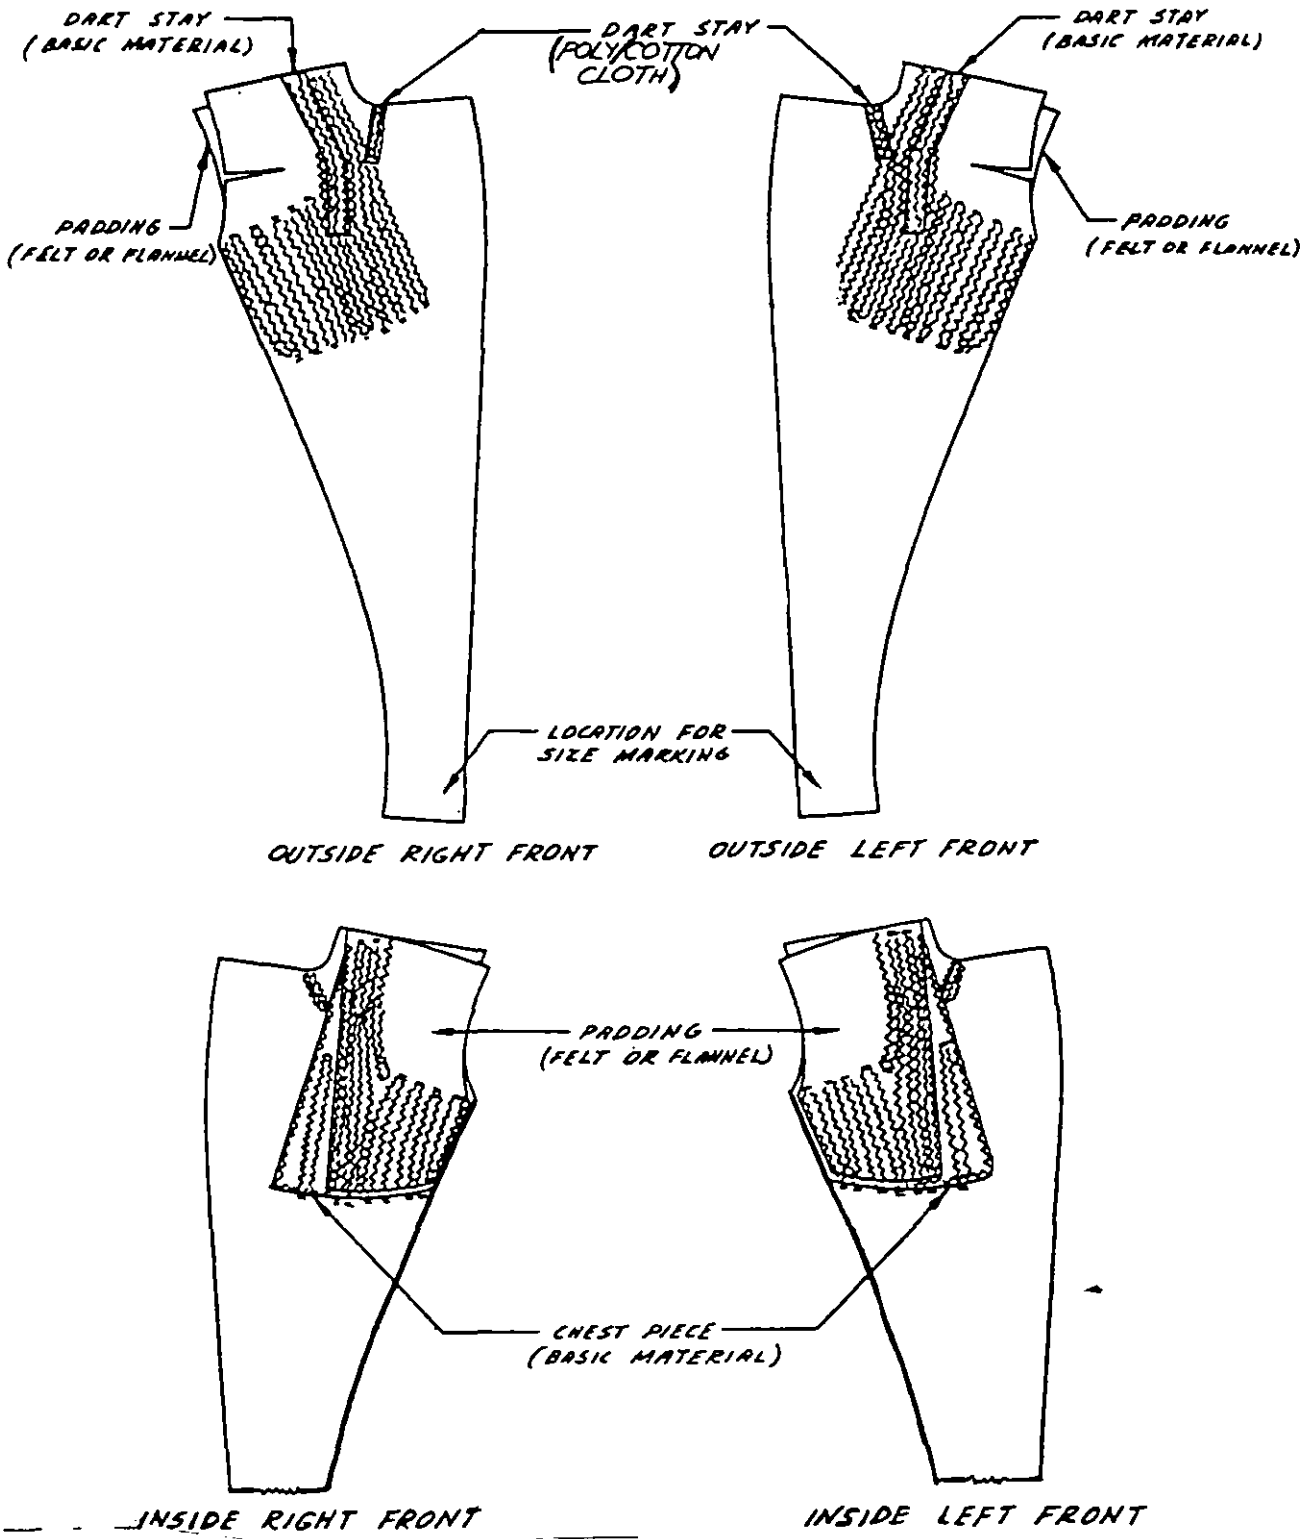


FIGURE 8. Coat front: type XII for overcoat, man's, wool, serge, green, or gabardine, blue (MARINE CORPS).

Source: https://assist.dla.mil -- Downloaded: 20261O-18T05:27Z
Check the source to verify that this is the current version before use.

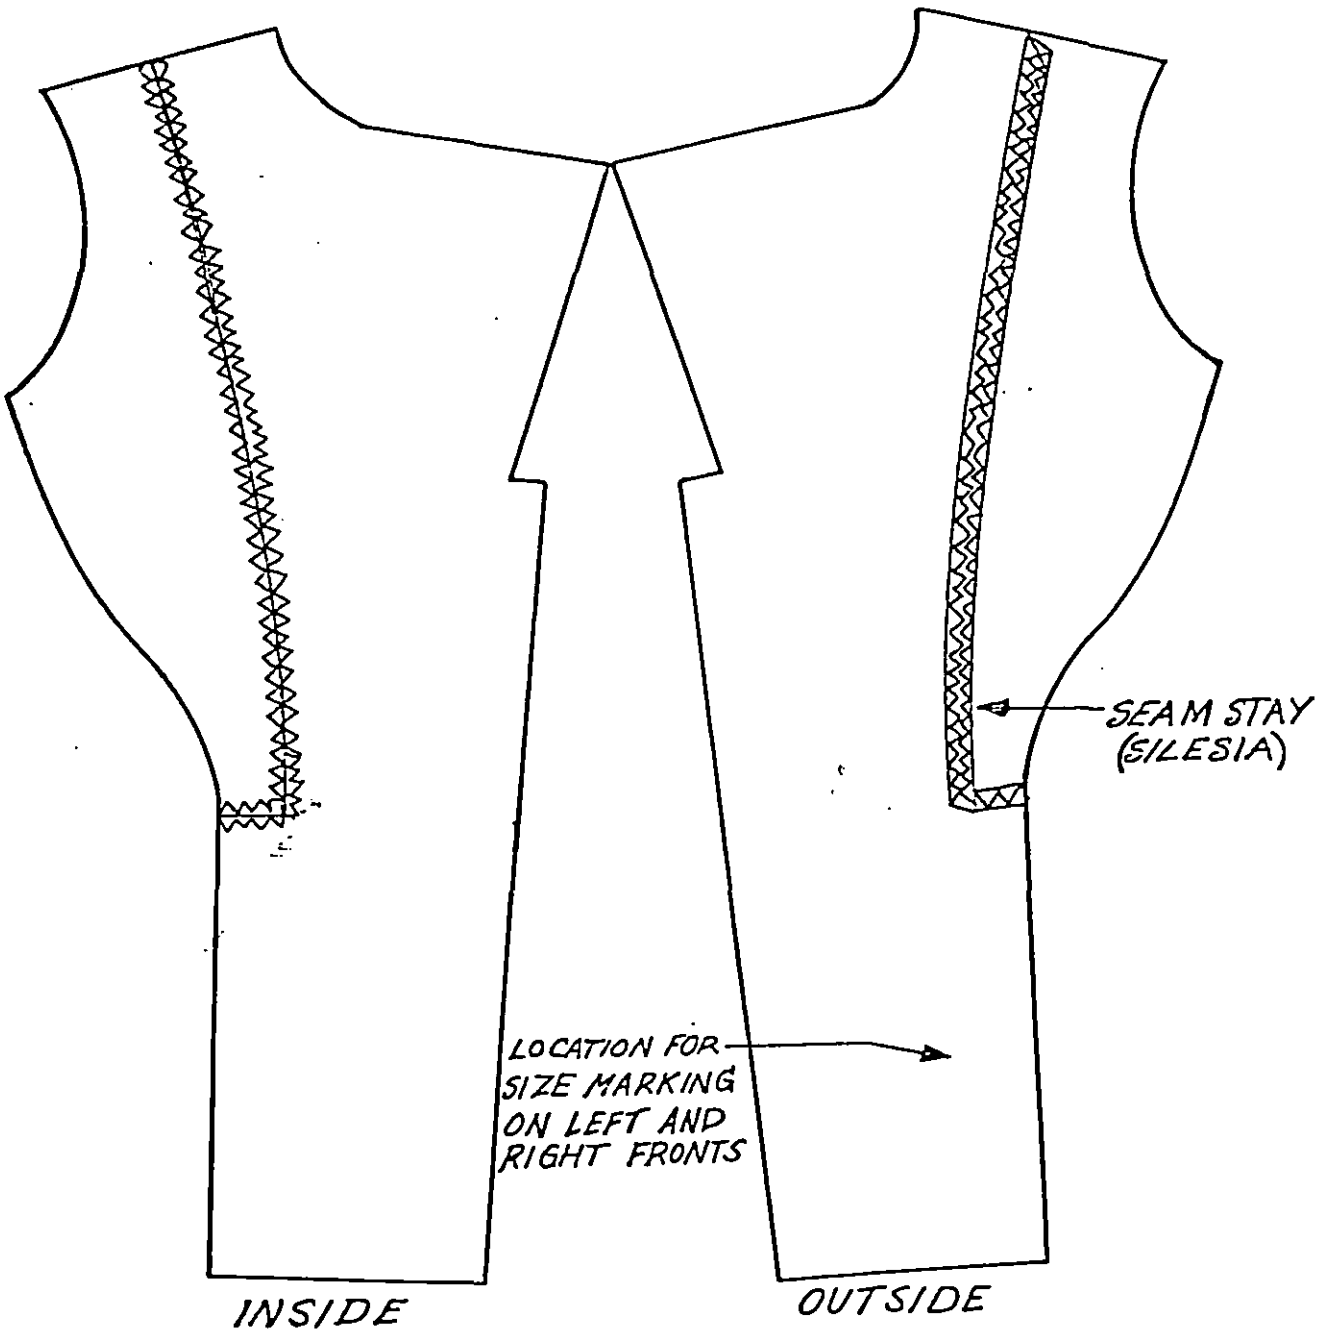


FIGURE 9. Coat front: type XIII and XV for coat, woman's: wool, serge; green polyester-wool; green and blue gabardine (MARINE CORPS).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

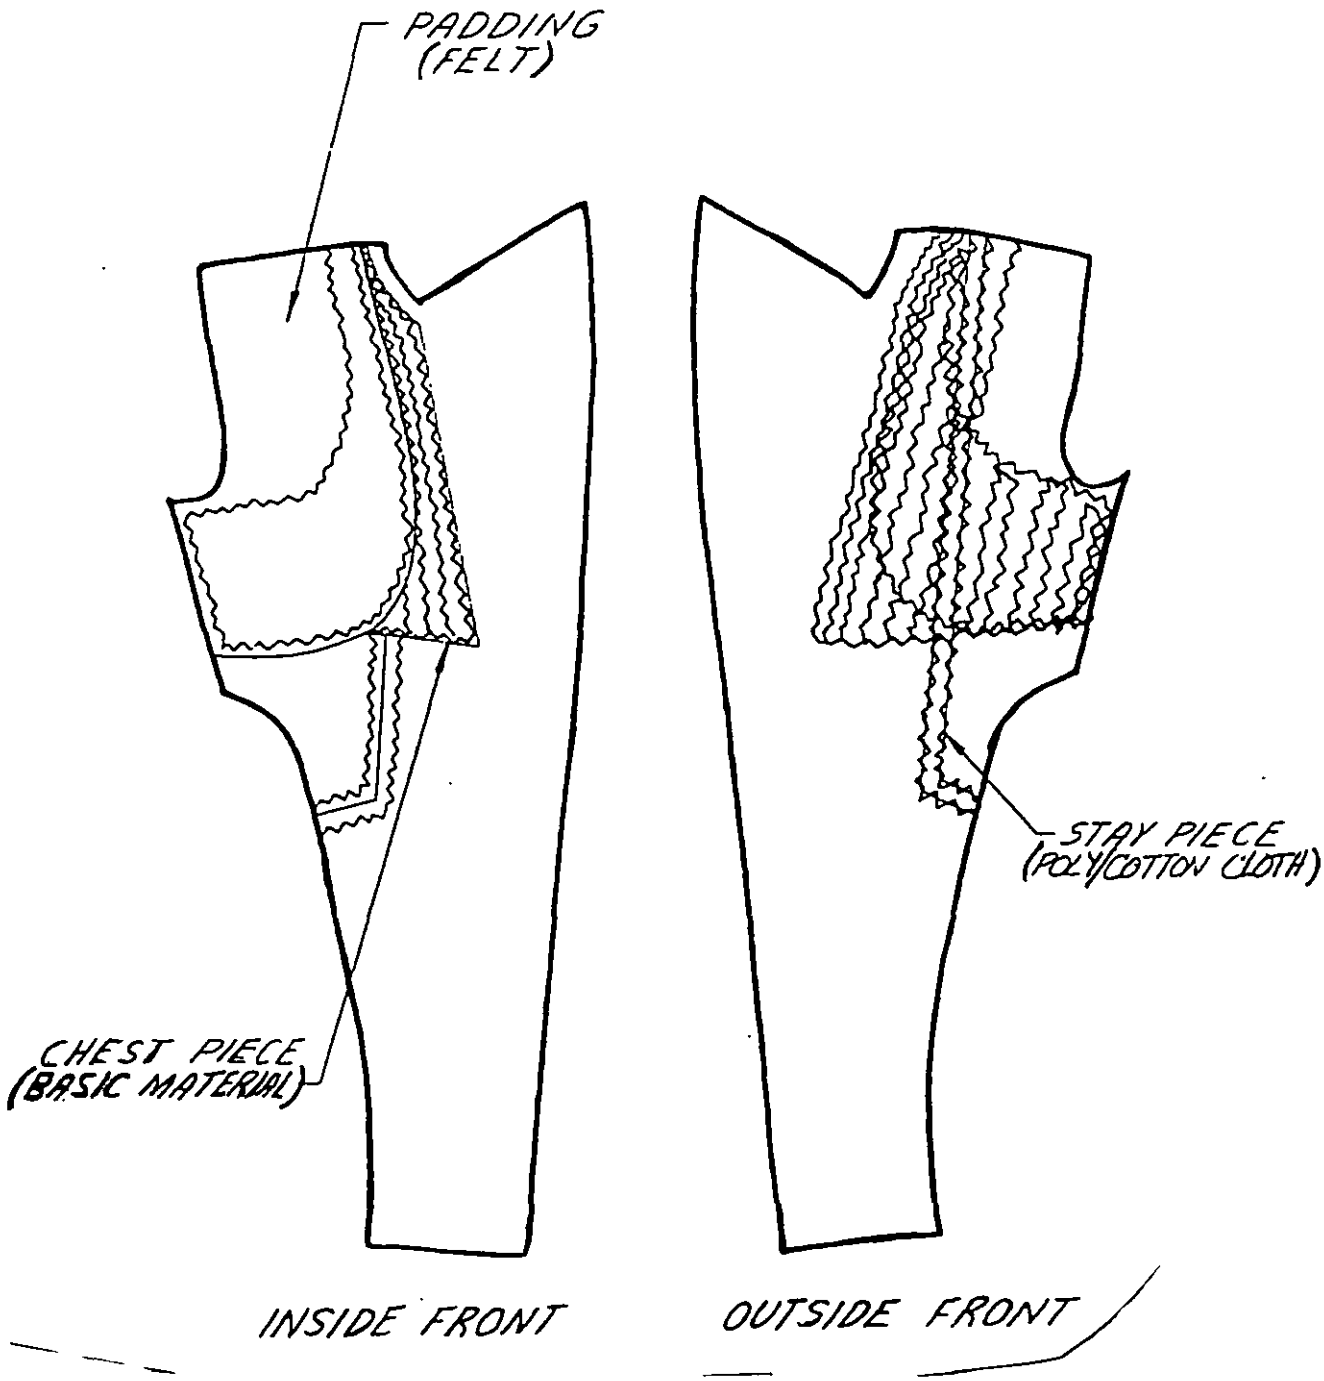


FIGURE 10. Coat front, type XIV for overcoat, man's, (officer's type) (NAVY).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

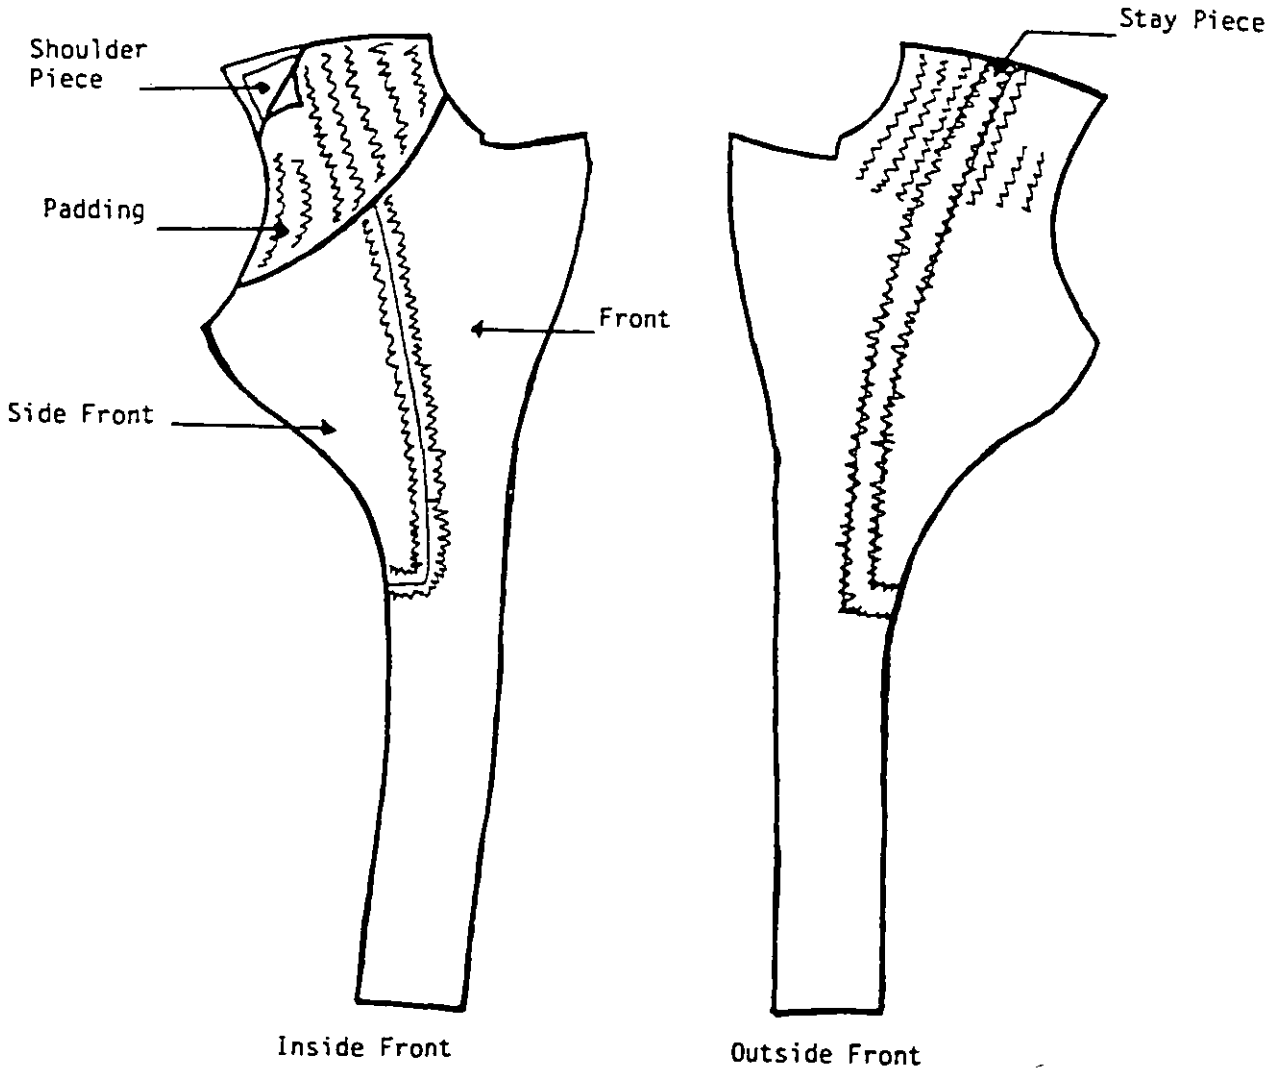


FIGURE 11. Coat fronts: type XVI, for coat, woman's, blue dress (NAVY).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.


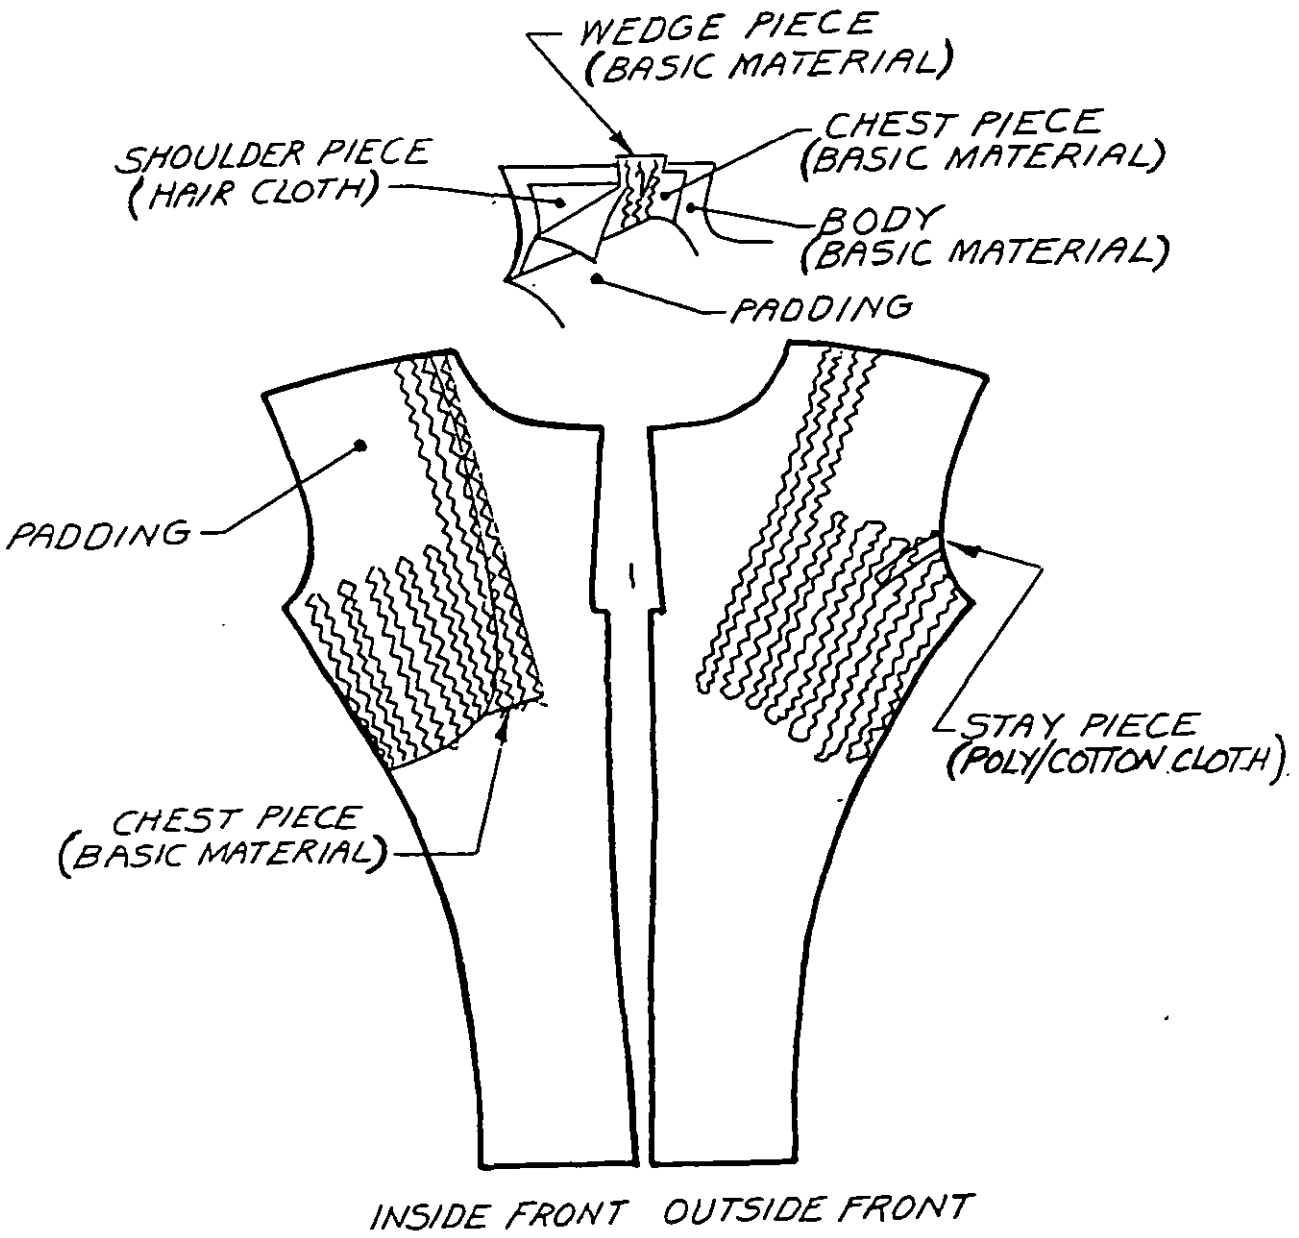


FIGURE 12. Coat fronts, type XVII, for coat man's, polyester/wool, serge (COAST GUARD).

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:27Z
Check the source to verify that this is the current version before use.

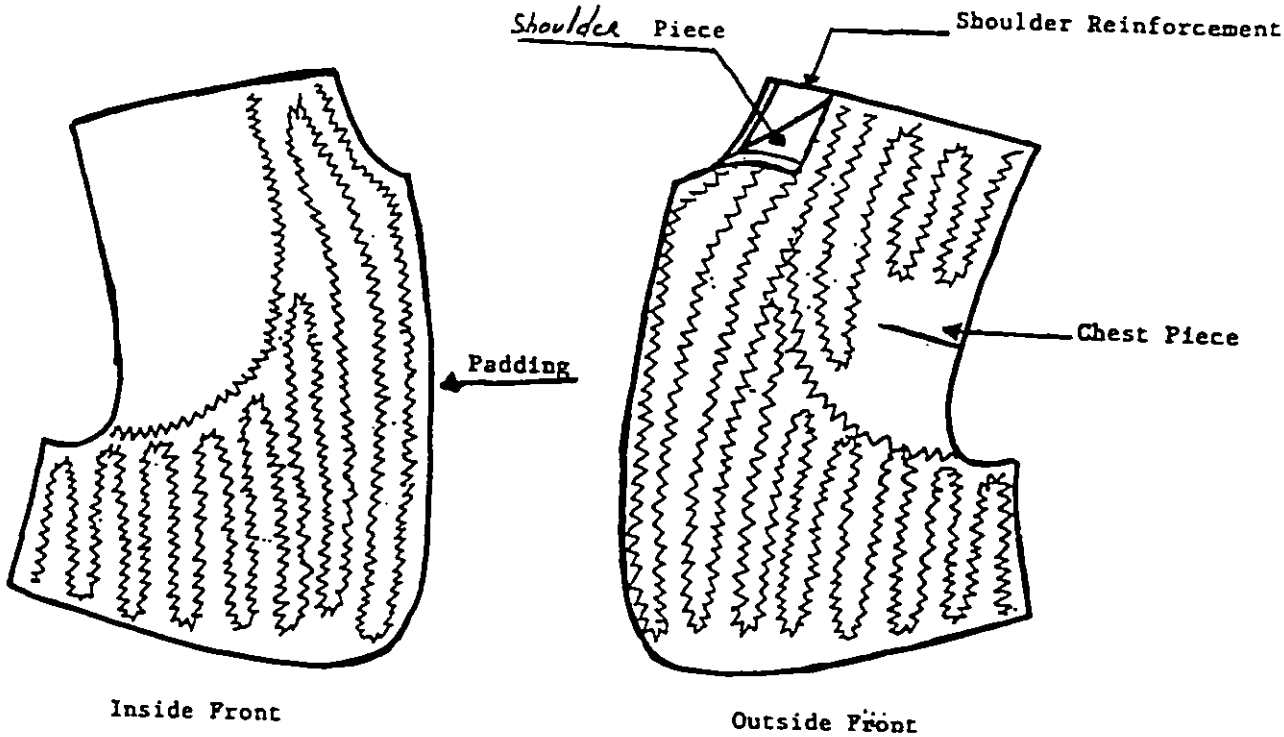

FLOATING CHEST PIECE

FIGURE 13. Coat fronts: type XVIII, for coat, men's, tropical and serge, polyester/wool, Army Green 344, fusible (ARMY).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

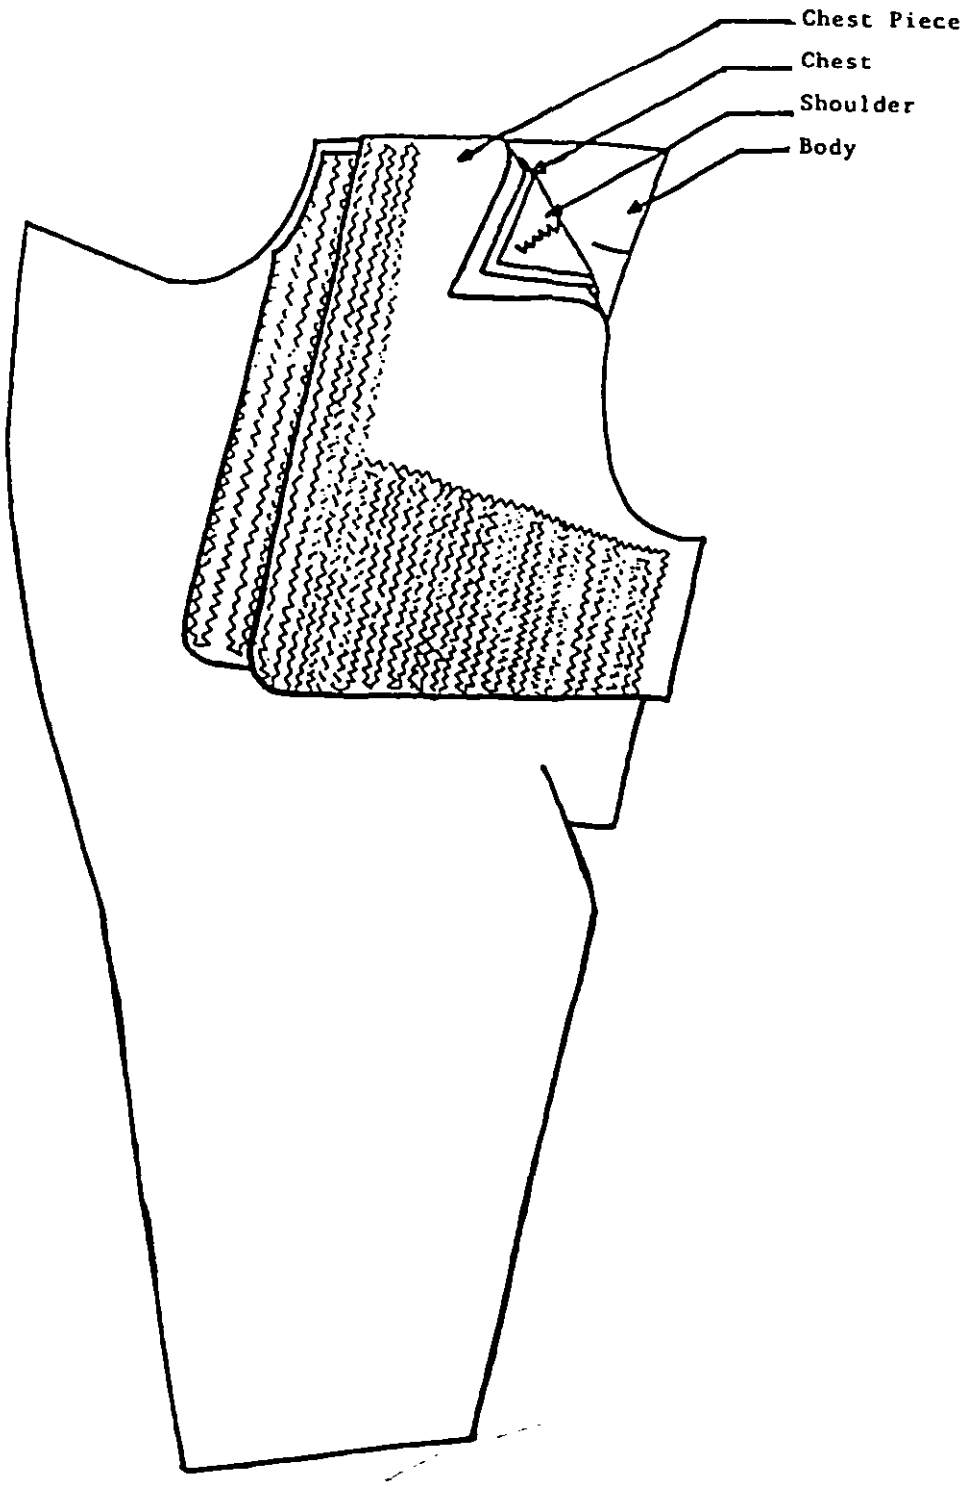


FIGURE 14. Coat fronts: type XIX, for overcoat, man's enlisted (NAVY).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

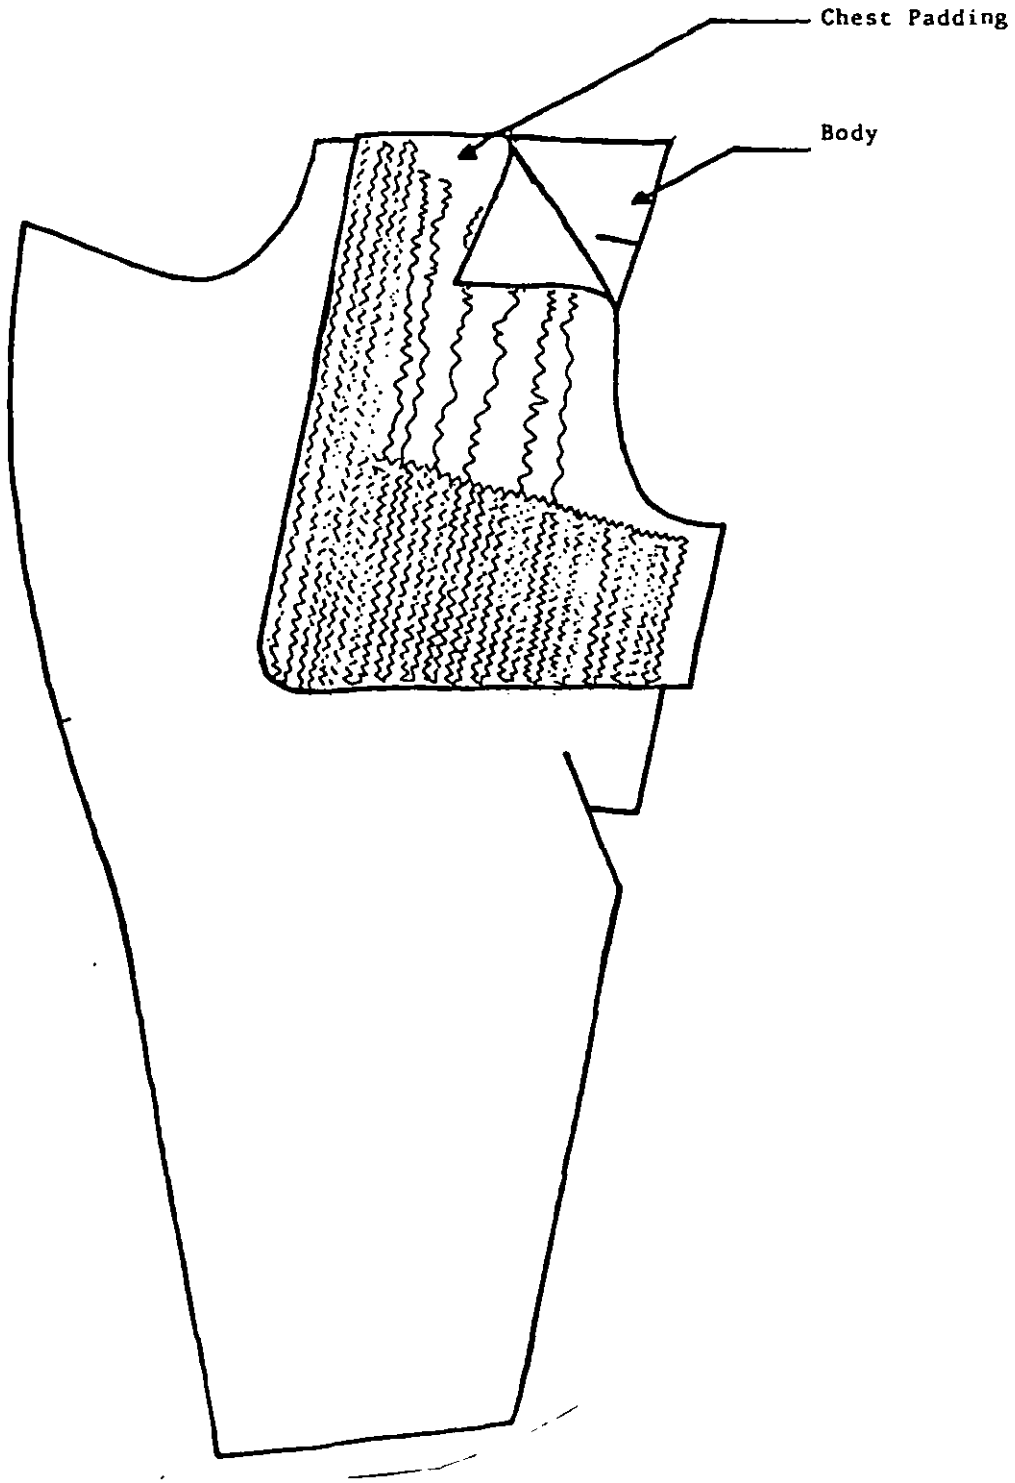


FIGURE 15. Coat fronts: type XX, for overcoat, woman's enlisted (NAVY).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

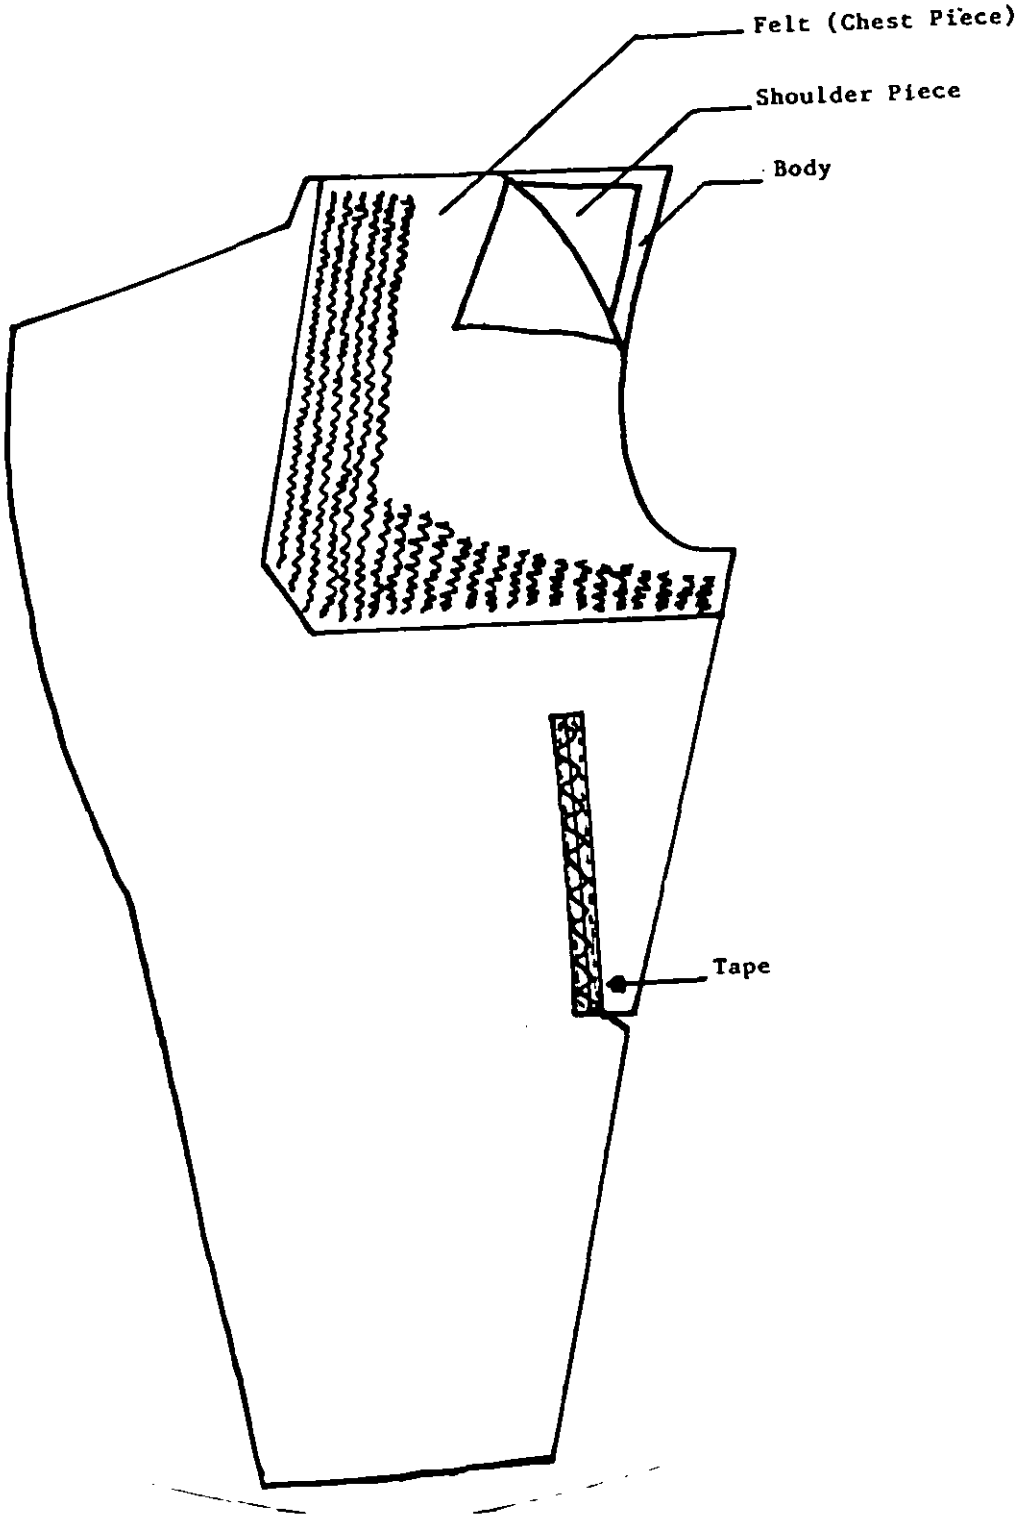


FIGURE 16. Coat fronts: type XXI, for coat, woman's, dress (COAST GUARD).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

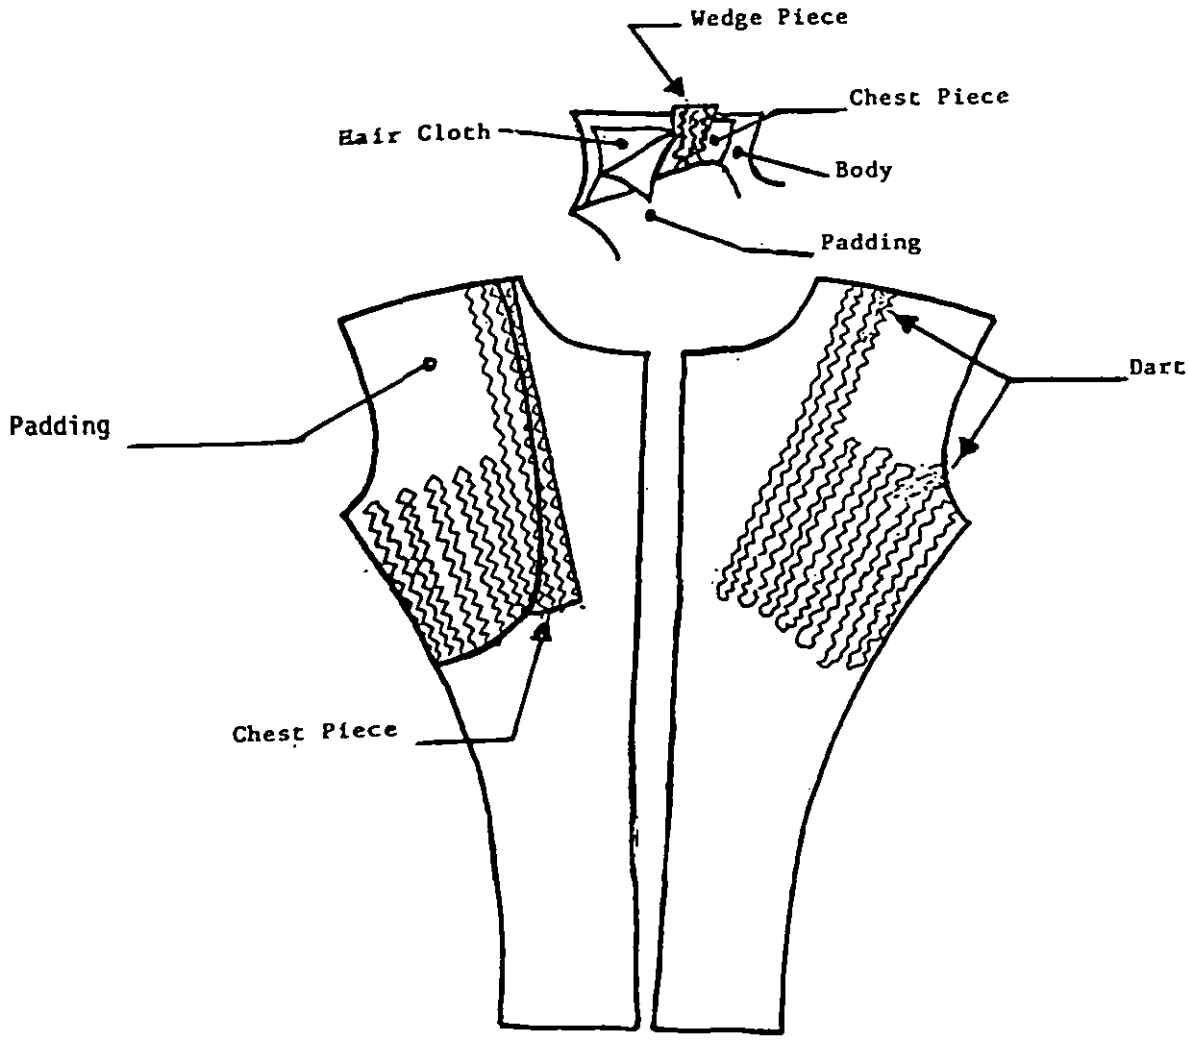


FIGURE 17. Coat fronts: type XXII, for topcoat, man's polyester, elastique(COAST GUARD).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

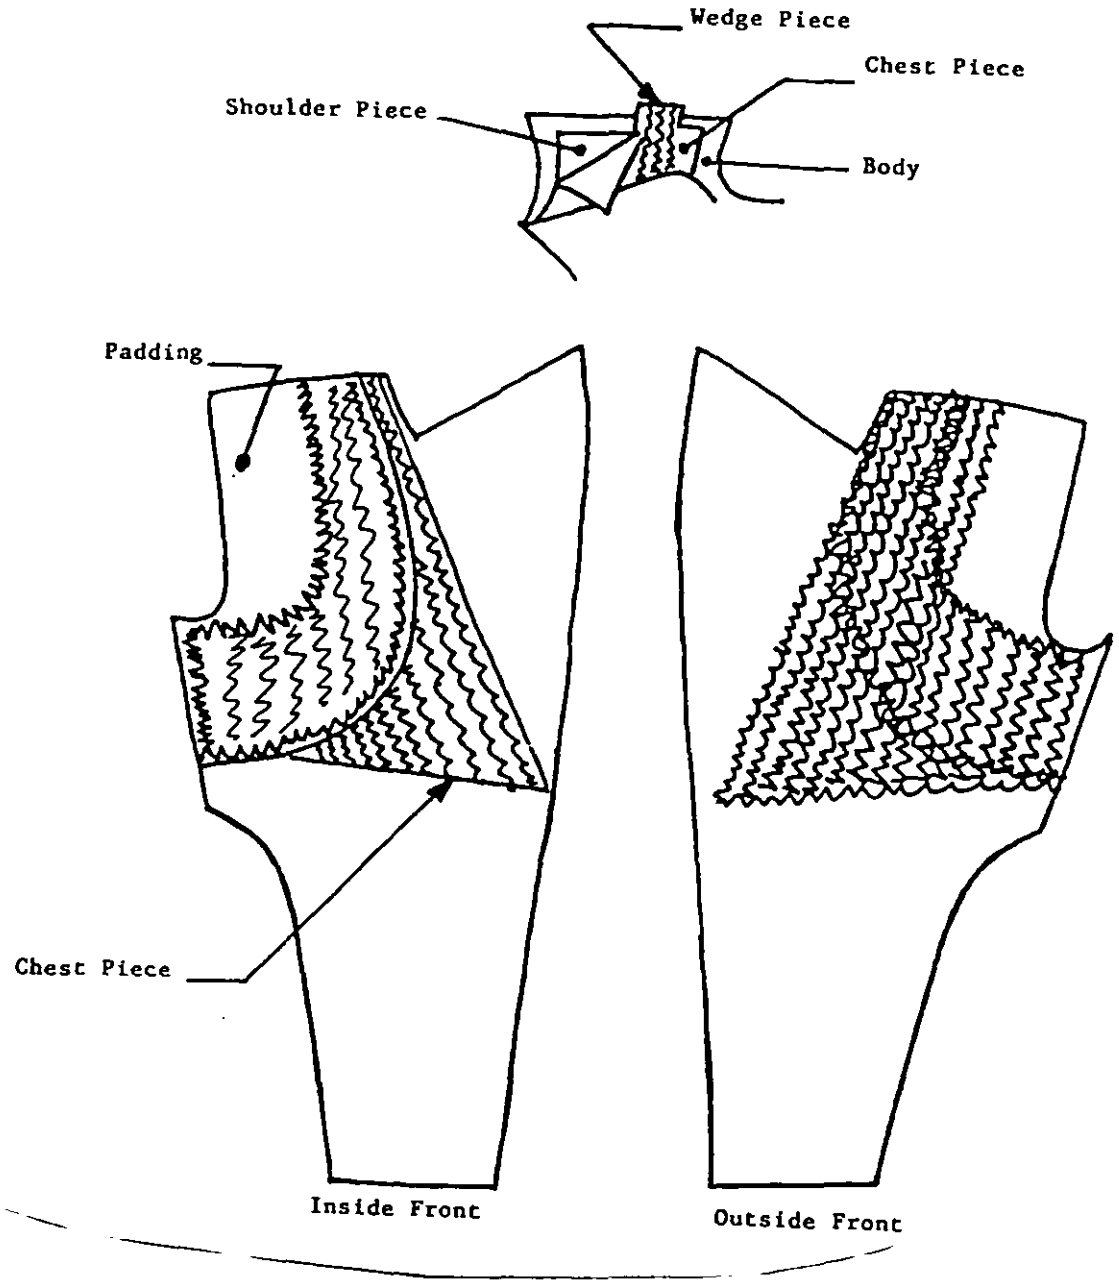


FIGURE 18. Coat fronts: type XXIII, for overcoat, man's, reefer (COAST GUARD).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.


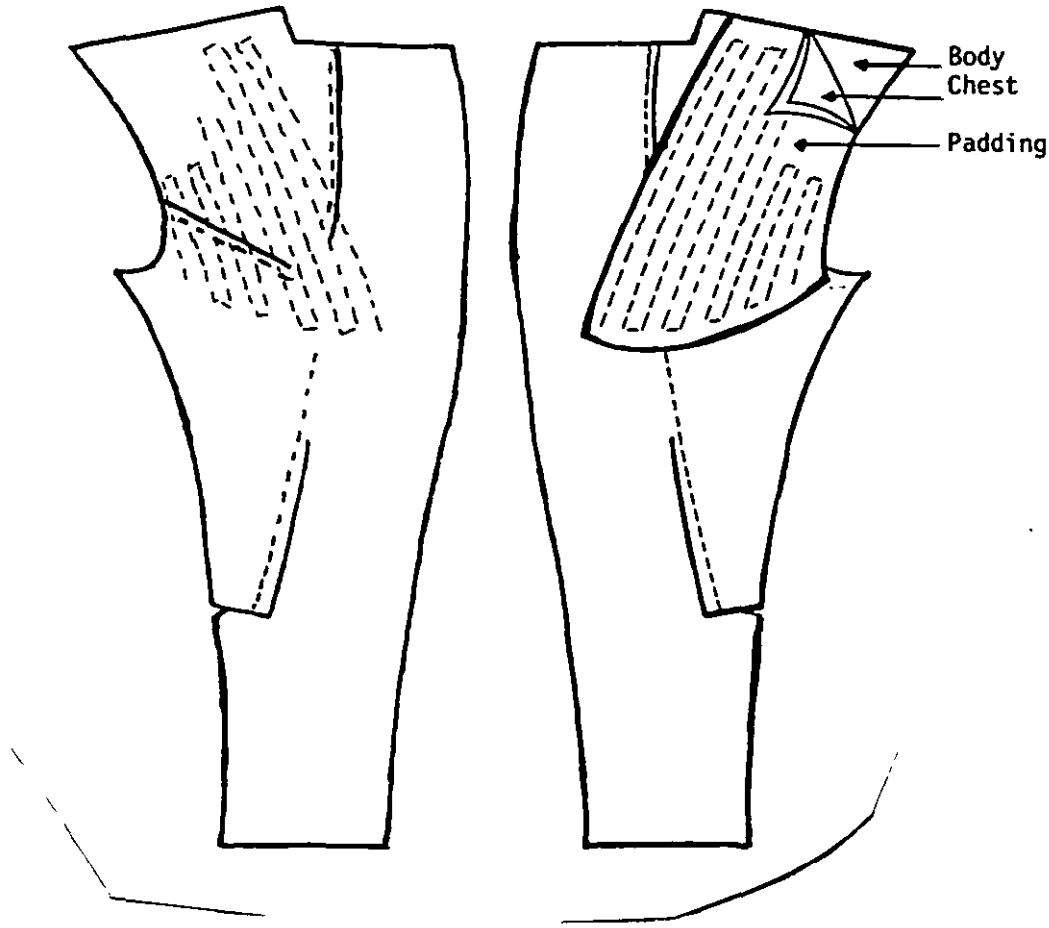


FIGURE 19. Coat fronts: type XXIV, for uniform, woman's aviation, working, green (NAVY).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

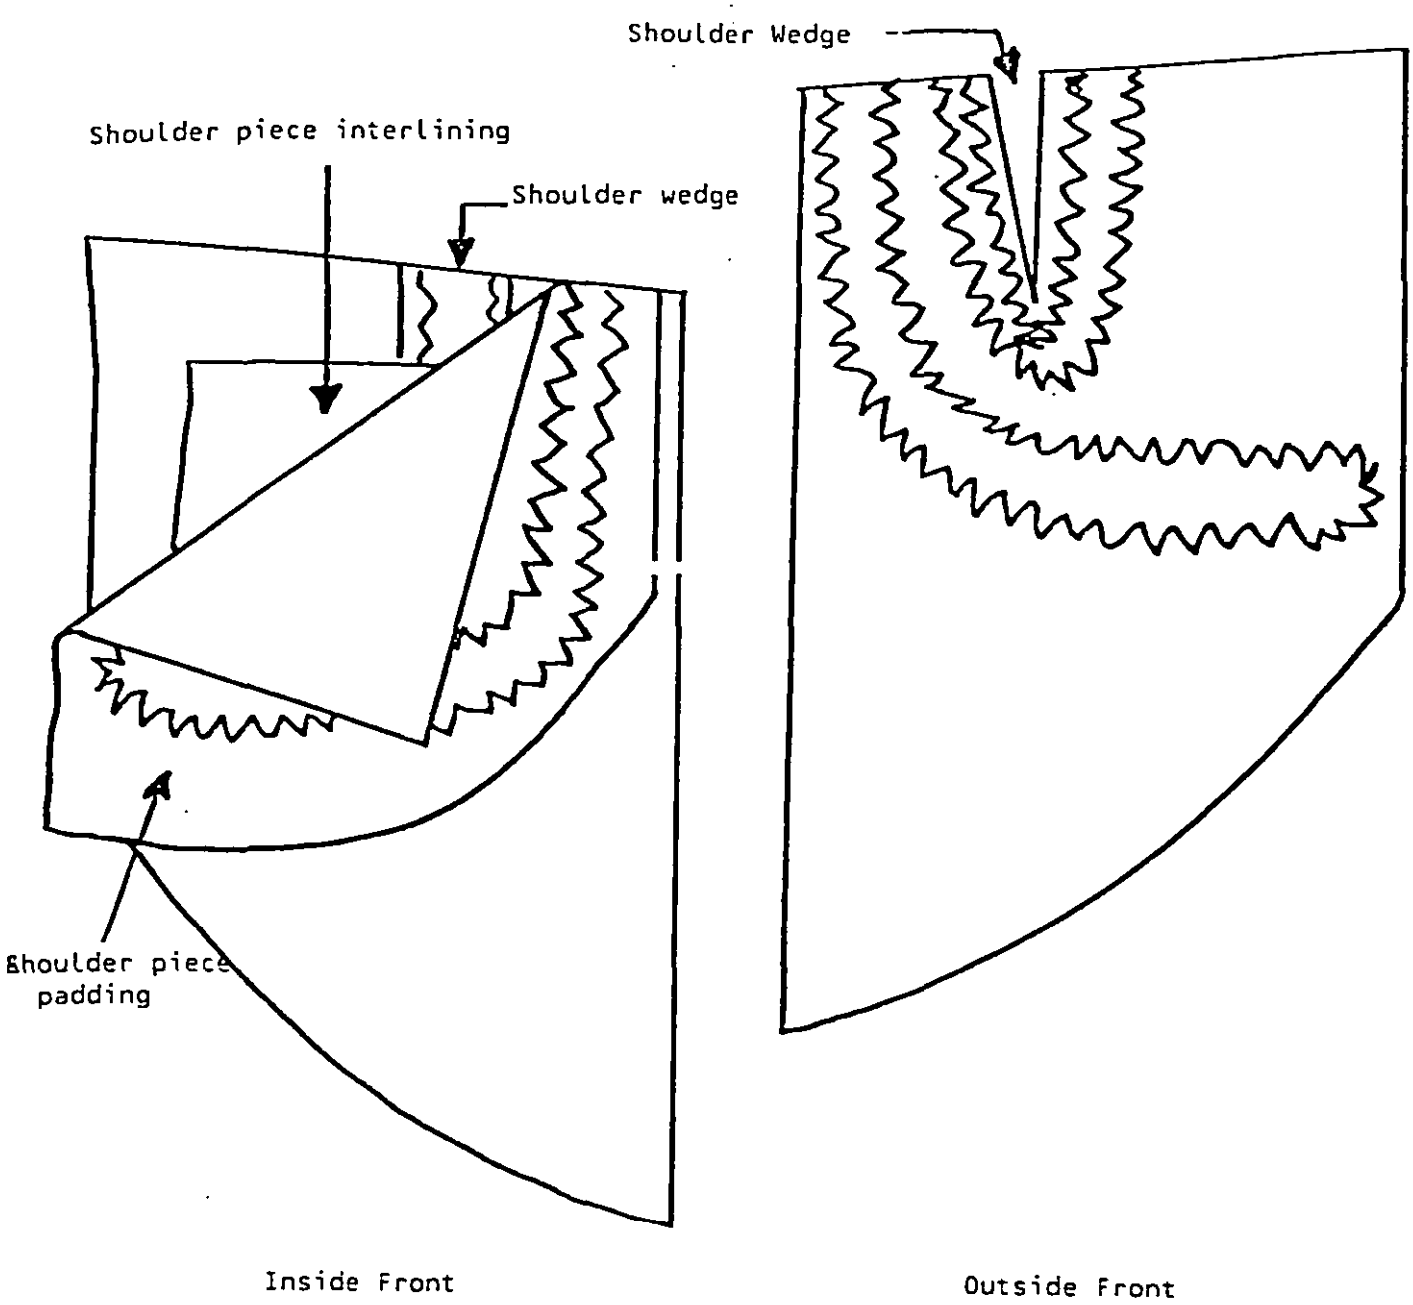

CHEST PIECE

FIGURE 20. Coat fronts: type XXV, for coat, woman's, classic design, polyester/wool, AG-344 fusible (ARMY).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-C-15065J	Coat Fronts

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
	☐ USER
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

Source: https://assist.dla.mil -- Downloaded: 20261 0-18T05:27Z
Check the source to verify that this is the current version before use.