MIL-C-15096H
1 February 1979
SUPERSEDING
MIL-C-15096G
11 September 1974

MILITARY SPECIFIATION

COAT, FOOD HANDLER'S (STEWARD)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for a food handler's coat constructed of a cotton uniform twill or a polyester/cotton crease resistant twill fabric.

1.2 Classification. The coat shall be of one type and of the following sizes (see 6.2):

Sizes: 32, 34, 36, 38, 40, 42, 44, 46, 48, and 50

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

V-T-276 - Thread, Cotton
V-T-280 - Thread, Cotton Gamp, Buttonhole
CCC-C-430 - Cloth, Sheeting, Cotton and Polyester and Cotton
CCC-C-461 - Cloth, Twill, Uniform, Cotton
DDD-B-1199 - Binding, Textile, Cotton, Bias-Cut
DDD-L-20 - Label; For Clothing, Equipage, and Tentage (General Use)
DDD-T-86 - Tape, Textile, Cotton, General Purpose (Unbleached, Bleached or Dyed)

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Officer in Charge, Navy Clothing and Textile Research Facility, 21 Strathmore Road, Natick, MA 01760, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 8415

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:30Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-B-17757 - Boxes, Shipping, Fiberboard (Modular Sizes)
MIL-C-29127 - Cloth, Twill, Polyester/Cotton (Crease-Resistant Finish)
* MIL-T-43548 - Thread, Polyester, Cotton Covered

STANDARDS

FEDERAL

FED-STD-751 - Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage

(Copies of specifications, standards, drawings and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply:

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCICATION, INC., AGENT
National Motor Freight Classification

(Application for copies shall be addressed to American Trucking Association, Inc., ATTN: Traffic Department, 1616 P Street, N.W. Washington, D.C. 20036).

UNIFORM CLASSIFICATION COMMITTEE, AGENT
Uniform Freight Classification

(Application for copies shall be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606.)

U. S. POSTAL SERVICE MANUAL

(Copies of the manual may be obtained from the Superintendent of Documents, U. S. Government Printing Office, Washington, D. C. 20402).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:30Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Guide sample. Guide samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variations from this specification may appear in the sample, in which case the specification shall govern.

* 3.2 First article approval. When specified, the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.3 and 6.2).

3.3 Materials.

* 3.3.1 Basic material. The basic material shall be polyester/cotton twill conforming to class 2 of MIL-C-29127, or any type of cotton cloth of CCC-C-461. The color shall match white shade 3053.

3.3.2 Cloth, sheeting. The cotton or polyester/cotton sheeting shall be bleached white, conforming to type II, class 2, style A or F of CCC-C-430.

3.3.3 Tape, woven. The tape shall be 3/16 inch wide, preshrunk, bleached white, conforming to type II, class 2 of DDD-T-86.

3.3.4 Binding, textile, cotton, bias-cut. The binding shall be 1 inch wide, bleached white, conforming to type II, class 1 of DDD-B-1199.

* 3.3.5 Thread.

3.3.5.1 Thread, cotton. The thread for seaming and stitching shall be cotton, conforming to type IA2, white AH, CA 66050, ticket numbers 40 and 50, 3 ply of V-T-276.

3.3.5.2 Thread, polyester, cotton covered. As an alternate to the cotton thread, a polyester, cotton covered thread may be used. When this option is exercized, white AH, CA 66050, ticket numbers 40 and 50, 2 or 3 ply of MIL-T-43548 shall be used.

3.3.5.3 Thread, cotton, gimp. The gimp for reinforcing the buttonholes shall be cotton, type I or II, white AH, CA 66050, size number 8 of V-T-280.

3.3.6 Hooks and eyes. The hooks and eyes shall be sew-on type, commercial designation size number 4, brass, with a nickel plated finish. Inspection shall be performed as specifiifed in 4.3.1.

* 3.3.7 Labels. Each coat shall have an identification label conforming to type IV, class 1 of DDD-L-20 and a size label conforming to type IV, class 2 of DDD-L-20, except that the stock number shall not be included. The identification label shall contain the following inscription:

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:30Z
Check the source to verify that this is the current version before use.

COAT, FOOD HANDLER'S (STEWARD)
BASE FABRIC: 100% COTTON (Example)
CONTRACT NO.: DLA 100-00-0-0000 (Example)
STOCK NO: 8415-00-000-0000 (Example)
SIZE: 40 (Example)
NAME OF SUPPLIER:

LAUNDERING INSTRUCTIONS

MACHINE WASH-HOT WATER
USE FORMULA I OF NAVSUPINST 4400.81

3.4 Design. The coat shall be single breasted with a bodkin button closure (supplied without buttons) with a neck dart in each front, semi-fitted with set-in sleeves, and shall have a fly front with five buttonholes on the left front and five eyelets on the right front. It shall have a standing collar with ends rounded and closed at the base with metal hook and eye.

3.4.1 Figure. The figure is furnished for information purposes only. When inconsistencies exist between the written specification and the figure, the written specification shall govern.

3.5 Patterns. Standard patterns to be used for cutting the contractor's working patterns will be furnished by the Government (see 6.3). The working patterns shall be identical to the standard patterns and shall not be altered in any way. The patterns allow 1/2 inch for all double needle, double lapped seams and as otherwise indicated in Table I.

* 3.5.1 Pattern parts. The component parts shall be cut from the material specified in accordance with the following pattern parts:

Material	Pattern parts	Cut parts
Cloth, Uniform Twill, Cotton or Cloth, Twill, Polyester/Cotton (Crease-Resistant Finish)	Back	2
	Front, right side	1
	Front, left side	1
	Facing, right side	1
	Facing, left side	1
	Top sleeve	2
	Undersleeve	2
	Topcollar	1
	Undercollar	1
Cloth, Sheeting, Cotton or Polyester/Cotton	Topcollar interlining	1
	Fly front, left side (buttonhole) may be roll cut	2
	Eyelet reinforcement (right side) may be roll cut	1

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:30Z
Check the source to verify that this is the current version before use.

3.6 Construction.

3.6.1 Stitches, seams, and stitchings. Stitch, seam, and stiching types specified in Table I shall conform to FED-STD-751. Wherever two or more methods for seam or stitch types are given for the same part of the operation, any one of them may be used. Where stitch type 401 is used, the looper or underthread shall be on the inside of the coat. Unless otherwise specified, edgestitching or topstitching shall be 1/4 inch from the folded edge. Double lapped seams shall be 1/4 (± 1/16) inch gauge with the outer row of stitching 1/16 inch from the turned under edge.

3.6.2 Thread breaks and ends of seams. Ends of all seams and stitchings, when not caught in other seams or stitchings, shall be backtacked not less than 1/4 inch. The ends of a continuous line of stitching shall be overlapped not less than 1/2 inch. Thread breaks (all stitch types) shall be repaired by using 301 stitch type.

3.6.3 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in Table I.

3.7 Manufacturing operations requirements. The coats shall be manufactured in accordance with the operation requirements specified in Table I. The supplier is not required to follow the exact sequence of operations listed provided that the finished coats are identical to that produced by following the sequence of operations as listed in Table I.

3.7.1 Shade and size marking. The component parts shall be marked, ticketed, or bundled to insure a uniform shade and size throughout the coat. Any method of shade and size marking may be used except:

1. Corrosive metal fastening devices.
2. Sew-on shade tickets.
3. Adhesive type tickets whose adhesive causes discoloration or whose adhesive mass adheres to the material upon removal of the ticket.

NOTE: The use of ink pad numbering machine, rubber stamp or pencil is allowed, provided the numbering does not show on the outside of the garment and wherever possible, is covered by the seam allowance.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:30Z
Check the source to verify that this is the current version before use.

Table I - Construction of coat

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
1.	Cutting. a. Cut the coats in strict accordance with patterns, which show size, shape, directional warp lines, and notches for the proper assembling of all parts. b. Cut the component parts out of one piece of material except the facings (facings may be roll cut) and undercollar which may be cut from ends.					
2.	Replacement of defective components. During the spreading, cutting and manufacturing process, components having material defects or damages that are classified as defects in Section 4 shall be removed from production and replaced with non-defective and properly matched components.					
3.	Shade marking (see 3.7.1). All parts shall be marked, ticketed or bundled to insure proper assembly throughout the garment, except those parts cut from ends which shall closely match the coat.					
4.	Darts. a. Fold and stitch a dart tapering to a point in each front as indicated by the patterns.	301 or 401	OSf-1	10-14	40/3 40/3	40/3 50/3
	b. Turn dart toward the armhole opening and topstitch 1/16 inch from inside folded edge of dart.	301	OSe-1	10-14	40/3	40/3
	c. Dart shall finish 5 3/4 (± 1/2) inches in length.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:30Z
Check the source to verify that this is the current version before use.

Table I - Construction of coat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
5.	Left front.					
	a. Stitch sheeting interfacing to front edge of left facing to approximately 1 inch from bottom end of interfacing. Clip seam at end of line of stitching, turn and edge stitch.	301 or 401	SSe-2	10-14	40/3 40/3	40/3 50/3
	b. Sew 5 horizontal buttonholes in buttonhole facing with center of eyelets 5/8 (± 1/8) inch from front edge with top buttonhole 2 (± 1/4) inches from finished neck seam. The bottom buttonhole shall be 9 (± 1/2) inches from the finished bottom hem, and the remaining buttonholes equally spaced between the top and bottom buttonholes.	Button-hole		52-54 per buttonhole	40/3	40/3
	c. Buttonholes shall be 7/8 inch long, taper bar style, eyelet end and worked over gimp with the purling on the inside of facing.					
	d. Stitch sheeting interfacing to left front (face side) approximately 1 inch from bottom end of interfacing Clip seam at end of line of stitching, turn and edge stitch.	301 or 401	SSe-2	10-14	40/3 40/3	40/3 50/3
	e. Bartack front edge of buttonhole facing to front interfacing horizontally, and midway between the buttonholes. Tacks shall be not less than 1/2 inch long and 1/2 to 3/4 inch from edge.	Bartack		28 per bartack	40/3	40/3
	f. Stitch both raw edges of the sheeting interfacing together at back edge 1/2 to 5/8 inch.	301 or 401	SSa-1	10-14	40/3 40/3	40/3 50/3

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:30Z
Check the source to verify that this is the current version before use.

Table I - Construction of coat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
5.	Left front (cont'd)					
	g. Stitch the front edge of the buttonhole facing to front edge of coat from notch at bottom of fly opening to bottom and across bottom the width of the facing, with back edge of facing turned over on itself 5/16 to 3/8 inch.	301 or 401	SSe-2(a)	10-14	40/3 40/3	40/3 50/3
	h. Turn facing to inside of coat, force out bottom corner and edge stitch through all plies from bottom of fly opening to bottom of coat, across bottom the width of the facing.	301 or 401	SSe-2(b)	10-14	40/3 40/3	40/3 50/3
	i. Turn the back edge of the buttonhole facing 5/16 to 3/8 inch over the raw edges of sheeting also turning under raw edge of bottom hem 3/8 to 1/2 inch and stitch to front.	301 or 401	LSd-1	10-14	40/3 40/3	40/3 50/3
	j. In lieu of operation 5i, the facing may be turned over the raw edges of the sheeting and stitched prior to stitching to front.	301 or 401	Similar to SSw-2(a)	10-14	40/3 40/3	40/3 50/3
	k. Stitch raw edges of top of facing and left front together at neck edge.	301 or 401	SSa-1	10-14	40/3 40/3	40/3 50/3
	l. Sheeting interfacing shall extend from neck seam to 3 (± 1/2) inches below bottom buttonhole.					
	m. Buttonhole facing shall finish 3 (± 1/4) inches wide.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:30Z
Check the source to verify that this is the current version before use.

Table I - Construction of coat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
6.	Right front.					
	a. Hem inner edge of facing 1/4 to 5/16 inch wide, 1/16 inch from folded edge.	301 or 401	EFb-1	10-14	40/3 40/3	40/3 50/3
	b. Hem inner edge of sheeting interfacing 7/8 to 1 inch wide, 3/4 inch from folded edge.	301 or 401	EFa-1	10-14	40/3 40/3	40/3 50/3
	c. Stitch the sheeting interfacing and facing to the right front 5/16 to 3/8 inch from raw edge with the facing and right front face-to-face and with the sheeting interfacing against the inside of facing. Stitching shall extend from inner edge of lapel across top, down front edge and across bottom the width of the facing. Turn and edge stitch.	301 or 401	SSe-2	10-14	40/3 40/3	40/3 50/3
	d. Interfacing shall extend from neck seam to 3 (± 1/2) inches below bottom eyelet.					
	e. Facing shall finish 3 (± 1/4) inches wide. Button stand shall finish 1 1/2 (± 1/8) inches wide.					
	f. Make five 1/8 to 3/16 inch inside diameter eyelets through right front and sheeting interfacing spaced to correspond with buttonholes and placed 1 1/4 (± 1/8) inches from front edge. The eyelets shall not go through the facing.			22-24 per eyelet	40/3	40/3
	g. Stitch raw edges at top of facing and right front together at the neck edge.	301 or 401	SSa-1	10-14	40/3 40/3	40/3 50/3

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:30Z
Check the source to verify that this is the current version before use.

Table I - Construction of coat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
7.	Join backs. Double stitch the center back seam with the left back lapped over the right back on the outside.	301 or 401	LSc-2	10-14	40/3 40/3	40/3 50/3
8.	Join fronts to backs at sides and shoulders. Double stitch the fronts to backs at side seams and at shoulder seams with the backs lapped over the fronts on the outside.	301 or 401	LSc-2	10-14	40/3 40/3	40/3 50/3
9.	Make and attach sleeves. a. Double stitch the inseam and outseam with top sleeve lapped over the under sleeve on the outside.	301 or 401	LSc-2	10-14	40/3 40/3	40/3 50/3
	b. The bottom of the sleeves shall be hemmed with the raw edge turned under 3/8 to 1/2 inch. The finished hem shall measure 1 (± 1/8) inch wide.	301 or 401	EFb-1	10-14	40/3 40/3	40/3 50/3
	c. Stitch sleeve to armhole 3/8 to 1/2 inch from raw edge, easing in the fullness as required.	301 or 401	LSak-2(a)	10-14	40/3 40/3	40/3 50/3
	d. Bind armhole seam with 1 inch wide white cotton binding with ends overlapping 1 (± 1/8) inch.	301 or 401	BSc-1	10-14	40/3 40/3	40/3 50/3
	e. As an alternate, operations c and d may be replaced by safety stitch construction, i.e., seam and overedge simultaneously, thus eliminating need of cotton binding.	515 or 516 or 517 or 518	SSa-2	10-14	40/3 40/3 40/3 40/3	50/3 50/3 40/3 40/3

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:30Z
Check the source to verify that this is the current version before use.

Table I - Construction of coat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
9.	Make and attach sleeve. (cont'd)					
	f. Turn seam against body and topstitch 3/16 to 1/4 inch from turned edge around the top of the armhole, starting 2 (± 1/2) inches above inseam in sleeve and finishing at outseam.	301 or 401	LSak-2(b)	10-14	40/3 40/3	40/3 50/3
10.	Make and attach collar.					
	a. Stitch the sheeting interlining to the underside of the topcollar at the bottom edge 1/8 inch from raw edge.	301 or 401	SSa-1	10-14	40/3 40/3	40/3 50/3
	b. Turn under the bottom edge of undercollar 3/8 to 7/16 inch and stitch 1/4 to 5/16 inch from folded edge.	301 or 401	EFa-1	10-14	40/3 40/3	40/3 50/3
	c. Stitch undercollar, topcollar and sheeting interlining together at top and side edges with the undercollar and topcollar face-to-face. Turn and topstitch.	301 or 401	SSe-2	10-14	40/3 40/3	40/3 50/3
	d. Stitch 5/16 to 3/8 inch from raw edge, topcollar and sheeting interlining to body of coat with topcollar and body of coat face-to-face, simultaneously inserting the top edge of the right and left facing in the seam. Also, insert a strip of 3/16 inch wide white cotton tape in the seam, located off center back seam forming a single loop.	301 or 401	BSg-2(a)	10-14	40/3 40/3	40/3 50/3
	e. The loop shall have a free length of 1 to 1 1/2 inches.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:30Z
Check the source to verify that this is the current version before use.

Table I - Construction of coat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
10. *	Make and attach collar. (cont'd) f. Turn collar to finished position and topstitch the topcollar to the body of coat 1/16 inch from folded edge simultaneously attaching the undercollar to body of coat. Care must be taken in this operation to insure raw edges do not show. g. The topcollar shall finish 1 3/8 (± 1/8) inches wide and the undercollar 1 1/2 (± 1/8) inches wide at center back.	301 or 401	BSg-2(b)	10-14	40/3 40/3	40/3 50/3
11.	Hem bottom of coat. a. The bottom of coat shall be hemmed with the raw edge turned under 3/8 to 1/2 inch with the hem finishing under the right and left front facings. The stitching shall extend 1/8 to 3/16 inch onto the inner edge of the right front facing and continue downward to the finished bottom of the coat. b. The hem shall finish 1 (± 1/8) inch wide.	301 or 401	EFb-1	10-14	40/3 40/3	40/3 50/3
12.	Hook and eye. a. Securely sew one hook horizontally to lower left corner of the undercollar. The hook shall be sewn to undercollar with the stitching through each eyelet and at front end of hook.	Hand or 101 or 301		3-4 double thread per hole 4-6 per hole 6-8 per hole	40/3 40/3 40/3	 40/3

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:30Z
Check the source to verify that this is the current version before use.

Table I - Construction of coat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
12.	Hook and eye. (cont'd)					
	b. Securely sew one eye horizontally to lower right corner of the undercollar. The eye shall be sewn to undercollar with stitching through each eyelet of the eye.	Hand		3-4 double thread per hole	40/3	
		or				
		101		4-6 per hole	40/3	
		or				
		301		6-8 per hole	40/3	40/3
13.	Clean coats.					
	a. Trim all thread ends.					
	b. Remove all loose threads.					
	c. Remove all spots, stains and shade tickets.					
14.	Labeling.					
	a. Identification - Position and mark the identification information on the right front facing approximately 2 inches from the bottom.					
	b. Size - Position and mark the size information on the inside and center of the undercollar, above the hanger.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:30Z
Check the source to verify that this is the current version before use.

3.8 Sizes and measurements. Sizes and measurements of the finished coats shall be as listed in Table II. All measurements and tolerances are expressed in inches.

Table II - Sizes and finished measurements

Size	A Chest	B Length	C Sleeve Length	D Collar Length
32	35	28 5/8	17 1/2	14 1/2
34	37	28 7/8	17 1/2	15
36	39	29 1/8	17 1/2	15 1/2
38	41	29 1/4	17 1/2	16
40	43	29 3/8	17 1/2	16 1/2
42	45	29 5/8	17 1/2	17
44	47	29 7/8	17 1/2	17 1/2
46	49	30	17 1/2	18
48	51	30 1/8	17 1/2	18 1/2
50	53	30 1/4	17 1/2	19
Tolerances	± 1	± 1/4	± 1/4	± 1/4

NOTE: A, B, C, and D refer to Figure 1. Measurements shall be taken with the coat laid flat and smooth.

A. Chest - Twice the measurement taken across the front at the base of the armholes from folded edge to folded edge; with buttonhole eyelets on left front superimposed to coincide with eyelets on right front.

B. Coat length - Measurement taken along back center seam from undercollar neck seam to bottom edge of coat.

C. Sleeve length - Measurement taken along inseam from armhole seam to bottom edge of sleeve.

D. Collar length - Measurement taken from end to end of collar along base of neck with collar in flat open position.

3.9 Workmanship. The finished coats shall conform to the quality established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:30Z
Check the source to verify that this is the current version before use.

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

* 4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3).
2. Quality conformance inspection (see 4.4).

4.3 First article inspection. When required, the first article submitted in accordance with 3.2 shall be inspected as specified in 4.4.2 for compliance with design, construction, workmanship, appearance, and dimensional requirements.

4.4 Quality conformance inspection. Inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated.

4.4.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with the requirements of referenced specificaitons, drawings, and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document. In addition, the contractor shall furnish a certificate of compliance stating that the hooks and eyes conform to the requirements specified in 3.3.6.

4.4.2 Examination of the end item. Examination of the end item shall be in accordance with 4.4.2.1 and 4.4.2.2. The applicable inspection levels and acceptable quality levels (AQL's) shall be as indicated in 4.4.2.3. The sample unit shall be one finished coat. The lot size shall be expressed in units of coats.

4.4.2.1 Visual examination. The coat shall be examined for defects in color, design, material, construction, workmanship and marking and the defects classified in accordance with the list below:

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:30Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor
MATERIAL DEFECTS AND WORKMANSHIP DAMAGES		
a. Any hole, needle chew, cut or tear	X	
b. Weakening defect such as slub, smash, multiple float	X	
c. Any outside part shaded (except parts which may be cut from ends)		X
d. Any visible mend, burn or drill hole	X	
CLEANNESS		
a. Any spot or stain on outside		X
b. Five or more thread ends not trimmed or loose thread not removed		X
c. Two or more shade or size markings not removed		X
d. Shade marking exposed or readily visible on outside of garment		X
COMPONENTS AND ASSEMBLY		
Any component part or operation omitted or not as specified (unless otherwise classified herein)	X	
CUTTING		
Any part not cut in accordance with directional lines indicated on patterns or in accordance with specification requirements	X	
SEAMS AND STITICHING		
a. Accuracy of seaming		
1. Part of garment caught in any unrelated stitching operation	X	
2. Seams puckered, twisted, or pleated (unless otherwise classified herein)		X
3. Ends of all seams and stitchings when not caught in other seams or stitchings backtacked less than 1/4 inch		X
4. Ends of a continuous line of stitching overlapped less than 1/2 inch		X
5. Thread breaks not secured or stitching back of the break less than 1/2 inch		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:30Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor
SEAMS AND STITCHING (cont'd)		
b. Gauge of stitching and seam allowance		
1. Stitching irregular, not within range or gauge specified or varies more than 1/16 inch when no range is specified (score only when condition exists on more than half the length of seam)		X
2. Edge, top or raised stitching sewn too close to edge resulting in damage to cloth		X
3. Width of seam allowance not as specified (score only when condition exists on more than half the length of seam)		X
c. Open seams or runoffs		
1. On all seams except bottom hem:		
-up to 1/4 inch inclusive		X
-more than 1/4 inch	X	
2. Bottom hem:		
-up to 1 inch inclusive		X
-more than 1 inch	X	
NOTE: One or more broken stitches or two or more continuous skipped or runoff stitches constitutes an open seam.		
d. Raw edges		
1. On outside:		
-more than 1/4 inch up to and including 1 inch		X
-more than 1 inch	X	
2. On inside and hems:		
-more than 1 inch		X
e. Seam and stitch types		
1. Not specified seam or stitch type		X
2. Looper thread on outside (when 401 stitch is used)		X
3. Any line of stitching omitted or insecure		X
f. Stitch tension		
1. Loose tension resulting in loose seam	X	
2. Loose tension on edge or raised stitching recognized by loosely exposed loops of lower or top thread		X
3. Tight tension (stitches break when normal strain is applied to the seam or stitching)	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:30Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor
SEAMS AND STITCHING (cont'd)		
g. Stitches per inch (score only when condition exists on major portion of a seam)		
1. One stitch less than the minimun or any number in excess of the maximum specified		X
2. Two or more stitches less than the minimum specified	X	
h. Seam direction -Any seam not facing the direction specified when caught in subsequent stitching operations		X
i. Bartacks		
1. Missing, insecure, or misplaced. Not serving intended purpose:		
-one bartack		X
-two or more bartacks	X	
2. Less than 1/2 inch in length		X
3. Positioned other than specified		X
BUTTONHOLES		
a. Omitted or added	X	
b. One or more broken or continuous skipped stitches in buttonhole		X
c. Uncut buttonhole		X
d. End not securely tacked		X
e. Stitches not securely caught in fabric (stitches can be pulled away from fabric)	X	
f. Cut length less than 7/8 inch or more than 1 inch long		X
g. Ragged		X
h. Less than 4 stitches in bar (not including cross-over stitch)		X
i. Gimp omitted in:		
-one buttonhole		X
-two or more buttonholes	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:30Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor
BUTTONHOLES (cont'd)		
j. Ends of gimp not pulled to inside of coat before barring ends of buttonhole		X
k. Inside edge of buttonhole less than 1/2 inch or more than 3/4 inch from finished front edge of coat		X
EYELETS		
a. Omitted or added	X	
b. Inside diameter of eylet less than 1/8 inch or more than 3/16 inch		X
c. Stitches not securely caught in fabric	X	
d. Inside edge of eyelet less than 1 1/8 inches or more than 1 3/8 inches from finished front edge of coat		X
e. Eyelets through facing	X	
INTERLINING MATERIAL		
Missing or not as specified	X	
IDENTIFICATION LABEL		
a. Omitted, incorrect or illegible	X	
b. Misplaced, not stamped on right front facing		X
SIZE LABEL		
a. Omitted, incorrect or illegible	X	
b. Misplaced, not on inside and center of collar		X
HEMS		
a. Sleeve or botton hem less than 7/8 inch or more than 1 1/8 inches wide		X
b. Irregular in width by 1/4 inch or more		X
c. Any hem twisted, puckered or pleated by stitching forming hem		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:30Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor
HOOK AND EYE		
a. Missing, loose, not specified type, defective or mismated	X	
b. Reversed, i.e., eye sewn to lower left corner of undercollar and hook sewn to lower right corner of undercollar		X
c. Misplaced, i.e., causing base ends of collar to overlap or spread open 1/4 inch or more when fastened		X
BINDING (when alternate construction is not used)		
a. Omitted	X	
b. Not securely caught to fabric, causing binding to pull away from fabric easily		X
c. Binding tight, i.e., causing edge of seams to curl up and not lie flat		X
d. Binding tight causing puckering or pleating		X
e. Badly twisted		X
DARTS		
a. One or both darts omitted	X	
b. One or both darts not turned toward armhole or ends not properly tapered causing unsightly bulge		X
c. One or both darts finished less than 5 1/4 inches or more than 6 1/4 inches in length		X
FRONTS		
a. Buttonholes and eyelets out of alignment by 3/8 inch or more		X
b. Buttonhole facing exposed on left front edge or short, tight or twisted causing fullness or puckering on outside		X
c. Length of fronts uneven by: -1/2 inch or more but not more than 1 inch -more than 1 inch	 X	X

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:30Z
Check the source to verify that this is the current version before use.

Defects	Classification Major	Minor
SLEEVES		
a. Reversed, i.e., right sleeve set in left armhole	X	
b. Sleeve excessively puckered, or one or more pleats visible at armhole seam		X
c. Armhole excessively stretched		X
d. Tight in armhole, causing pleats or puckers in coat front or back		X
e. Sleeve back seams unequal distance from shoulder seam by more than 1/2 inch		X
COLLAR (top and under)		
a. Collar style other than specified	X	
b. Undercollar exposed on outer edge of topcollar		X
c. Collar off center by 1/2 inch or more		X
d. Collar tight when joined to neckline causing puckers or pleats around neckline		X
e. Topcollar twisted, tight or having excessive fullness		X
f. Undercollar less than 1 3/8 inches or more than 1 5/8 inches wide at center back		X
g. Topcollar less than 1 1/4 inches or more than 1 1/2 inches wide at center back		X

4.4.2.2 Dimensional examination. The coat shall be examined for defects in dimensions in accordance with the following:

a. Any measurement deviating from nominal dimensions and tolerances specified in Table II shall be scored as a measurement defect.

b. Sleeve lengths unequal in length by 1/2 inch or more shall be scored as a size measurement defect.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:30Z
Check the source to verify that this is the current version before use.

4.4.2.3 Inspection levels and acceptable quality levels. The inspection levels and acceptable quality levels (AQL's) expressed as defects per hundred units (DHU) shall be as follows:

	AQL's	Inspection level
For visual examination in 4.3.2.1:		
Major	2.5	II
Total (Major and Minor combined)	15.0	II
For dimensional examination in 4.3.2.2:		
One class	4.0	S-3

4.4.3 Examination of preparation for delivery. An examination shall be made to determine that packaging, packing and marking comply with the Section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per hundred units.

Examine	Defect
Marking (exterior and interior)	Omitted, incorrect, illegible, of improper size, location, sequence or method of application.
Materials	Any component missing, damaged, or not as specified.
Workmanship	Inadequate application of components, such as incomplete closure of container flaps, improper taping, loose strapping, or inadequate stapling; bulging or distortion of container.
Content	Number of coats per package and shipping container more or less than specified.

* 5. PACKAGING

5.1 Preservation-packaging. Preservation-packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A. Each coat shall be laid flat with front edges abutting and the back facing upward. The sleeves shall be flattened and placed along the length of the coat. Fold the coat in half lengthwise, keeping the edges of the fronts together. The coat shall then be folded in half along the length. The completely folded coat shall measure approximately 15 inches by 11 inches. Each folded coat shall be inserted in a snug-fitting flat style clear polyethylene film bag of 0.00125 inch thickness (± 20% tolerance). All seams and closures shall be formed by heat sealing. A 1/4 inch diameter hole shall

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:30Z
Check the source to verify that this is the current version before use.

be made at one corner of the polyethylene bag to allow excess air to escape. As an alternate, the polyethylene bag may be of the tuck-in or reverse flap type, in which a heat seal closure and corner vent hole are not required.

5.1.2 Level C (Commercial packaging). Coats shall be packaged to afford adequate protection against physical damage during shipment from the contractor to the first receiving activity. The package and the quantity per package shall be the same as that normally used by the contractor for retail distribution.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A. Ten coats of one size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled, closed and reinforced conforming to type SF, class weather-resistant, grade V2s, variety SW, size 1A of MIL-B-17757. The fiberboard for the liner shall conform to type CF, class weather-resistant, variety DW, grade V15c of MIL-B-17757. Level A packages shall be packed flat, reversed end for end, one in length, one in width, and ten in depth within the shipping container. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper. Toward the end of the contract or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

5.2.2 Level B. Ten coats of one size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled and closed conforming to type CF, class domestic, variety SW, grade 275, size 1A of MIL-B-17757. The fiberboard for the liner shall conform to type CF, class domestic, variety DW, grade 200 of MIL-B-17757. Level A packages shall be packed flat, reversed end for end, one in length, one in width, and ten in depth within the shipping container. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper. Toward the end of the contract or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

5.2.2.1 Weather-resistant packing. When specified (see 6.2), the shipping container shall be a grade V3c or V3s or V4s fiberboard box fabricated in accordance with MIL-B-17757 and closed in accordance with the appendix of the container specification.

5.2.3 Level C (Commercial packing). Coats, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retain distribution. Containers shall comply with the U.S. Postal Service Manual, Uniform Freight Classification Rules or National Motor Freight Classification Rules, or applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:30Z
Check the source to verify that this is the current version before use.

5.3 Marking. In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with MIL-STD-129.

5.3.1 Polyethylene bagged packages. Polyethylene bagged packages shall have the required information legibly printed or stamped in black directly on the bag across the center face or on a white paper label inserted within the bag so as to permit ready identification. The bag or label shall indicate the following information:

STOCK NUMBER
ITEM DESCRIPTION
SIZE
QUANTITY

5.3.2 Labels, mixed sizes. Each shipping container, pack with mixed sizes only, shall have securely attached to the end and side, directly under the printing or stenciling a white paper label 5 by 4 inches with the words "MIXED SIZES" plainly stamped or printed thereon and under these words shall be legibly stamped or printed the correct quantity and sizes contained therein.

6. NOTES

6.1 Intended use. The coat is intended to be worn by stewards when performing duty in the wardroom.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) Sizes required (see 1.2).
(c) When first article sample is required (see 3.2).
(d) Levels of packaging and packing required (see 5.1 and 5.2).
(e) When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).

6.3 Samples and patterns. For access to samples and patterns, address the procuring activity issuing the invitation for bids.

* 6.4 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Navy - SA
Air Force - 99

Review activity:
Air Force - 45

Preparing activity:
Navy - SA

Project No. 8415-0154

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:30Z
Check the source to verify that this is the current version before use.

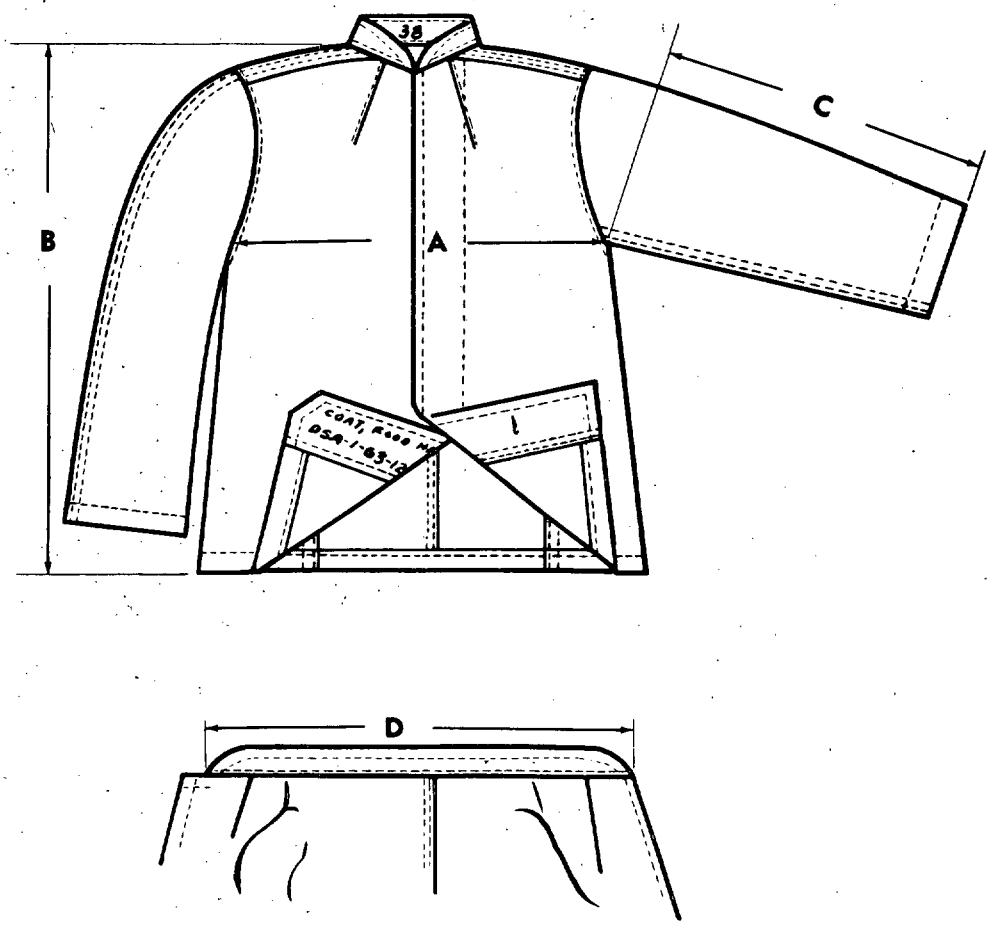


Figure 1 — COAT, FOOD HANDLER'S (STEWARD)

☆U.S. GOVERNMENT PRINTING OFFICE: 1979 — 603-022/835

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:30Z
Check the source to verify that this is the current version before use.