MIL-P-15064G
31 March 1987
SUPERSEDING
MIL-P-15064F
13 December 1976

MILITARY SPECIFICATION

PADS, SHOULDER AND SLEEVE-HEAD

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This document covers shoulder and sleeve-head pads used in clothing by the military services.

1.2 Classification. The pads shall be of the following types and classes, as specified (see 6.2):

Type I	-	Pads, Shoulder, Man's
Class 1	-	Army, Navy, Coast Guard
Class 2	-	Marine Corps (Jackets, Evening Dress; and Wool; and Polyester/Wool Coats)
Class 3	-	Marine Corps (Overcoat, Wool)
Type II	-	Pads, Shoulder, Man's (Navy Evening Dress Uniform)

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to U.S.: Army Natick Research, Development, and Engineering Center, Natick, MA 01760-5014, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8315

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

Type III - Pads, Shoulder, Woman's

Class 1 - Army, Navy, Coast Guard
Class 2 - Marine Corps (Coats, Wool; and Polyester/Wool)
Class 3 - Marine Corps (Overcoat, Wool)
Class 4 - Air Force (Coats, Women's)

Type IV - Sleeve-head, Man's and Woman's

2. APPLICABLE DOCUMENTS

2.1 Government documents.

* 2.1 Documents. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

SPECIFICATIONS

FEDERAL

A-A-203	- Paper, Kraft, Untreated
V-T-276	- Thread, Cotton
CCC-C-438	- Cloth, Buckram, Woven and Nonwoven
CCC-C-440	- Cloth, Cheesecloth, Cotton, Bleached and Unbleached
PPP-B-636	- Boxes, Shipping, Fiberboard

MILITARY

MIL-C-297	- Cloth, Interlining, Cotton Warp, and Spun Hair-Wool Filling
MIL-L-35078	- Loads, Unit: Preparation of Semiperishable Subsistence Items; Clothing, Personal Equipment and Equipage; General Specification For

STANDARDS

FEDERAL

FED-STD-191	- Textile Test Methods
FED-STD-751	- Stitches, Seams, and Stitchings

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	- Marking for Shipment and Storage
MIL-STD-147	- Palletized Unit Loads
MIL-STD-731	- Quality of Wood Members for Containers and Pallets

(Copies of documents required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

* 2.2 Other publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted shall be those listed in the issue of the DODISS specified in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS shall be the issues of the nongovernment documents which are current on the date of the solicitation.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

D 3951 - Standard Practice for Commercial Packaging

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

(Technical society and technical association documents are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

* 2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document shall take precedence. Nothing in this document, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Guide samples. Guide samples, when furnished, are solely for guidance and information (see 6.3). Variations from this document may appear in the samples, in which case this document shall govern.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

3.2 Materials.

* 3.2.1 Print cloth. The print cloth shall be unbleached cotton or as an alternate for type I, class 1, types II and III, class 4 pads, a 50 percent cotton, 50 percent polyester blended cloth, ± 5 percent cotton or polyester with 54 by 35 minimum yarns per inch may be used and shall meet the requirements in table I when tested as specified in 4.2.1.1.

TABLE I. Material requirements

Type and class	Minimum yarns per inch	Weight (oz per sq yd)
Type I, class 1, type II and type III, class 4	54 by 42	1.8 (min)
Type I, classes 2 and 3 and type III, class 3	60 by 48	2.0 to 3.5

3.2.2 Cheesecloth.

3.2.2.1 Type I, class 1; type III, class 1; and type IV sleeve-heads. The cheesecloth shall conform to type II, class 1 of CCC-C-440. As an option, type IV sleeve-heads and type I, class 1 pads may be made of fabric specified in 3.2.7, in which case the cheesecloth is not required.

3.2.2.2 Type III, class 2 pads. The cheesecloth shall be plain woven unbleached cotton cloth weighing 2.0 to 2.5 ounces per square yard. Testing shall be as specified in 4.2.1.1.

3.2.3 Felt. The felt shall meet the following requirements when tested as specified in 4.2.1.1.

3.2.3.1 Type II pads. The felt shall be a blend of cotton, wool, and rayon and shall weigh 4.2 to 4.3 ounces per square yard, any gray color and have a uniform thickness of 0.040 ± 0.005 inch. The wool content shall be a minimum of 30 percent dry weight.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

3.2.3.2 Type III, class 1 pads. The felt shall be a blend of cotton and wool; cotton, rayon, and wool; or cotton and rayon. The felt shall weigh not less than 6.0 ounces per square yard and have a thickness of 0.058 to 0.070 inch under a 10-ounce load. The wool content shall be a minimum of 40 percent dry weight.

3.2.3.3 Type III, class 2 pads. The felt shall be white or gray, pressed felt consisting of wool and cotton or wool, cotton and synthetic fibers, thoroughly mixed and carded to produce a uniform and even blend that is well felted. The felt shall be smooth, free from tears, holes, lumps, or foreign matter and shall contain no loading materials, such as starch, glue, or other sizing substance. The felt shall weigh 3 to 4 ounces per square yard and have a minimum thickness of 0.030 inch. The felt shall contain not less than 50 percent wool.

3.2.3.4 Type III, class 4 pads. The felt shall be a blend of cotton, wool, and rayon weighing 2.1 to 2.4 ounces per square yard, shall be white, and shall have a uniform thickness of 0.02 ± 0.003 inch. The wool content shall be a minimum of 30 percent dry weight.

3.2.4 Batting. The batting shall meet the following requirements when tested as specified in 4.2.1.1.

3.2.4.1 Type I, classes 2 and 3, and type III, class 3 pads. The batting shall be pure India cotton, thoroughly cleaned, free from pills and neps.

3.2.4.2 Type II pads. The batting shall be a commercial batting made of harsh fibered cotton with a minimum staple length of 1/2 inch, weighing approximately 14 ounces per square yard.

3.2.4.3 Type III, class 1 pads. The batting shall be made of garnetted fiber, containing not less than 90 percent wool dry weight.

3.2.5 Interlining.

3.2.5.1 Type I, class 1 pads. The interlining material shall be cotton warp and spun hair-wool filling conforming to type I of MIL-C-297.

3.2.5.2 Type I, classes 2 and 3, type III, class 3 pads. The interlining shall be white buckram with yarns per inch of 28 ± 2 by 24 ± 2 when tested as specified in 4.2.1.1.

3.2.5.3 Type III, class 1 pads. The interlining shall be bleached buckram conforming to type II, class 1 of CCC-C-438.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

3.2.5.4 Type III, class 2 pads. The interlining material shall be matted noils consisting of wool or a mixture of approximately 90 percent wool and the remainder cotton or cotton synthetic fibers when tested as specified in 4.2.1.1.

3.2.5.5 Type III, class 4 pads. The interlining material shall be cotton warp and spun hair-wool filling cloth conforming to type III, class 1 of MIL-C-297.

* 3.2.6 Wadding. The wadding for type I, class 1 shoulder pads and type IV sleeve-heads shall be made of either 100 percent cotton or a blend of carded cotton and synthetic fibers. The blend shall contain not less than 40 percent bleached cotton and not more than 60 percent other white synthetic fibers when tested as specified in 4.2.1.1. The wadding shall be white and weigh not less than 2.8 ounces per square yard with a glazed finish on the top and bottom surfaces. As an option, the type IV sleeve-heads may be made of fabric specified in 3.2.7, in which case the wadding is not required. The wadding for type III, class 4 shoulder pads shall be made of carded bleached cotton with the top surface glazed. The wadding shall be white, shall weigh not less than 2.0 ounces per square yard, and shall contain not less than 85 percent cotton and not more than 15 percent other fibers when tested as specified in 4.2.1.1.

* 3.2.7 Polyester-needlepunch. If optional construction is used, the fabric for the type IV sleeve-heads and type I, class 1 pads shall be natural colored 100 percent polyester-needlepunch with the following requirements:

a. Weight (oz per yd), minimum - 3.0
b. Stiffness (load pounds):
   Machine direction - 0.0055 ± 0.0025
   Cross direction - 0.0065 ± 0.0025
c. Breaking strength (pounds), minimum:
   Machine direction - 6.0
   Cross direction - 3.0
d. Thickness (inches), minimum - 0.050

3.2.8 Thread. Cotton thread for seaming and stitching the pads shall conform to type IA1, unbleached, ticket number 70, 2 ply of V-T-276.

3.3 Construction.

3.3.1 Stitches, seams, and stitchings. Stitch, seam, and stitching types specified in table II shall conform to FED-STD-751. When two or more methods of seams or stitch types are given for the same operation, any one of them may be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

3.3.2 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in table II.

3.4 Manufacturing operations requirements. The pads shall be manufactured in accordance with operation requirements as specified in table II. The contractor is not required to follow the exact sequence of operations.

3.4.1 Figures. Figures 1, 2, 3, 4, and 5 are furnished for information purposes only. To the extent of any inconsistencies between the written document and the figures, the written document shall control.

3.5 Dimensions. Pads shall meet the following requirements and shall be tested in accordance with 4.2.4.

* 3.5.1 Type I, class 1. Type I, class 1 pads shall measure 4 3/4 inches (± 1/4 inch) at the point of the widest dimension and 10 inches (± 1/4 inch) straight across the bottom. Length along the outside curved edge shall be 14 1/2 inches (± 1 inch). The finished pad shall measure 1/2 ± 1/8 inch thick at the vertical center of the pad and taper to a thickness of 1/4 ± 1/8 inch at curved edge (see figure 1).

* 3.5.2 Type I, class 2. Type I, class 2 pads shall measure 4 1/2 inches (± 1/4 inch) at the point of widest dimension and 9 1/2 inches (± 1/4 inch) straight across the bottom. Length along the outside curved edge shall be 14 1/2 inches (± 1/4 inch). The finished pad shall measure 1/2 ± 1/8 inch thick at the vertical center of the pad. The finished pads shall weigh 0.675 to 0.725 ounce per pair.

3.5.3 Type I, class 3. Type I, class 3 pads shall measure 4 3/4 inches (± 1/4 inch) at the point of widest dimension and 10 1/2 to 11 inches straight across the bottom. Length along the outside curved edge shall be 17 inches (± 1/4 inch). The finished pad shall measure 1 1/4 to 1 1/2 inches thick at the vertical center of the pad. The finished pads shall weigh 0.775 to 0.825 ounce per pair.

3.5.4 Type II. Type II pads shall measure 4 1/2 inches (± 1/4 inch) at the point of widest dimension and 8 inches (± 1/4 inch) straight across the bottom. Length along the outside curved edge shall be 13 inches (± 1/4 inch). The finished pad shall measure 1 1/2 inches (± 1/4 inch) thick at the vertical center of the pad and taper to a thickness of 1/4 ± 1/8 inch at the curved edge (see figure 2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

3.5.5 Type III, class 1. Type III, class 1 pads shall measure 4 1/2 inches (± 1/8 inch) at the point of widest dimension and 8 inches (± 1/8 inch) straight across the bottom. Length along the outside curved edge shall be 13 inches (± 1/8 inch). The finished pad shall measure 1/4 to 3/8 inch thick at the vertical center of the pad and taper to a thickness of 1/8 to 3/16 inch at the curved edge (see figure 3).

* 3.5.6 Type III, class 2. Type III, class 2 pads shall measure 4 3/4 inches (± 1/4 inch) at the point of widest dimension and 9 1/2 inches (± 1/4 inch) straight across the bottom. Length along the outside curved edge shall be 14 inches (± 1/4 inch). The finished pad shall measure 1/4 to 3/8 inch thick at the vertical center of the pad and taper to a thickness of 1/8 ± 1/16 inch at the curved edge. The finished pads shall weigh 0.750 to 1.000 ounce per pair.

3.5.7 Type III, class 3. Type III, class 3 pads shall measure 4 1/2 inches (± 1/8 inch) at the point of widest dimension and 8 inches (± 1/8 inch) straight across the bottom. Length along outside the curved edge shall be 13 inches (± 1/8 inch). The finished pad shall measure 1/4 to 3/8 inch thick at the vertical center of the pad and taper to a thickness of 1/8 to 3/16 inch at the curved edge (see figure 3).

3.5.8 Type III, class 4. Type III, class 4 pads shall measure 2 5/8 inches (± 1/8 inch) wide at the center and 8 1/4 inches (± 1/8 inch) long at the front edge (see figure 4).

3.5.9 Type IV. Type IV sleeve-heads shall measure 1 7/8 inches (± 1/8 inch) wide and 13 inches (± 1/4 inch) long (see figure 5).

3.6 Workmanship. The finished pads shall conform to the quality established by this document. The occurrence of defects shall not exceed the applicable acceptable quality levels.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

TABLE II. Manufacturing operations requirements

No.	Requirements	Stitch type	Seam and stitching type	Stitches per inch	Thread	
					Needle	Bobbin/ Looper
Type I, class 1, Shoulder Pad						
1.	Cutting:					
	a. Cut the print cloth for the cover and the cheesecloth for the bottom on the bias, to conform to contour and measurements of 3.5.1 and figure 1.					
	b. Cut six plies of wadding. Cut top ply the same size as the print cloth cover, cut bottom ply 1/4 inch smaller than the cheesecloth bottom, and cut each of the remaining four plies 1/4 inch smaller successively from the one preceding it, from the bottom up (operation 2.a (2)).					
	c. Cut the interlining piece 5 inches ± 1/8 inch square.					
	NOTE: Top print cloth and layer of wadding may be combined in cutting.					
2.	Construction:					
	a. Superimpose materials in the following sequence, starting from bottom:					
	(1) Cheesecloth bottom.					
	(2) Wadding (5 plies shingled as described in operation 1.b).					

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

TABLE II. Manufacturing operations requirements - Continued

No.	Requirements	Stitch type	Seam and stitching type	Stitches per inch	Thread: Needle	Thread: Bobbin/ Looper
	Type I, class 1, Shoulder Pad - Continued					
2.	Construction: - continued					
	(3) Interlining (between 4th and 5th plies of wadding, counting from the bottom). Place in center of pad on the bias. (4) Wadding (same size as print cloth). (5) Print cloth cover.					
	b. Baste with one row of stitching around curved edge of pad, through top and bottom fabrics and wadding, 3/4 ± 1/4 inch from edge.	301	SSa-1	1-2	70-2	70-2
	c. Stitch with two rows of zigzag stitching 1 inch ± 1/4 inch gage with the outside row 1 1/2 inches ± 1/4 inch (at center of pad) from where the concave edge will finish and with both rows backtacked at both sides of area where pad will be cut in half (operation 2.d. and figure 1).	304	SSv-2	1-2	70-2	70-2
	d. Cut pad in half on the bias, cutting out a portion totaling 3/4 to 1 inch wide at the center and tapering to nothing at ends to produce a concave edge (see figure 1). In cutting, a 1/8 to 1/2 inch section shall remain uncut to retain pads in pairs.					
	e. Notch print cloth 4 inches back from the front end of the pad.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

TABLE II. Manufacturing operations requirements - Continued

No.	Requirements	Stitch type	Seam and stitching type	Stitches per inch	Thread	
					Needle	Bobbin/ Looper
	Type I, classes 2 and 3, Type III, class 3 Shoulder Pads					
1.	Cutting:					
	a. Cut the print cloth for the top and bottom on the bias, to conform to contour and measurements of 3.5.2, 3.5.3, or 3.5.7, as applicable.					
	b. Cut one layer of batting the same size as the top print cloth.					
	NOTE: Top print cloth and layer of wadding may be combined in cutting.					
	c. Shingle remaining required batting with a graduation of thickness to conform to measurement of finished pad.					
	d. Cut the interlining piece 4 1/2 inches ± 1/8 inch square.					
2.	Construction:					
	a. Superimpose material in the following sequence starting from the bottom:					
	(1) Print cloth bottom.					
	(2) Graduated batting, with largest area against bottom print cloth.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

TABLE II. Manufacturing operations requirements - Continued

No.	Requirements	Stitch type	Seam and stitching type	Stitches per inch	Thread: Needle	Thread: Bobbin/ Looper
	Type I, classes 2 and 3, Type III, class 3 Shoulder Pads - Continued					
1.	Construction: - continued					
	(3) Interlining, placed on center of pad, on the bias. (4) Layer of batting cut the same size as the top cover. (5) Top cover print cloth.					
	b. Baste with one row of stitching around curved edge 1/2 ± 1/8 inch from the edge.	301	SSa-1	2-4	70-2	70-2
	c. Stitch with two rows of zigzag stitching 3/4 ± 1/8 inch gage with the outside row 1 3/4 inches ± 1/4 inch from center of tapered end of pad and with both rows backtacked at both sides of area where pad will be cut in half (operation 2.e).	304	SSv-2	2-4	70-2	70-2
	d. Overedge stitch the outside edge of the pad.	503 or 504	SSa-1 SSa-1	6-10 6-10	70-2 70-2	70-2 70-2
	e. Cut the pad in half on the bias, cutting out a portion totaling 3/4 to 7/8 inch wide at center and tapering to nothing at sides to produce a concave edge. In cutting, a 1/8 to 1/2 inch section shall remain uncut to retain pads in pairs.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

TABLE II. Manufacturing operations requirements - Continued

No.	Requirements	Stitch type	Seam and stitching type	Stitches per inch	Thread	
					Needle	Bobbin/ Looper
	Type II, Shoulder Pad					
1.	Cutting:					
	a. Cut the felt for the top, batting for the filler, and print cloth for the bottom on the bias, to conform to contour and measurements of 3.5.4 and figure 2.					
2.	Construction:					
	a. Superimpose material in the following sequence, starting from bottom: (1) Print cloth bottom. (2) Batting. (3) Felt top.					
	b. Baste with one row of stitching around curved edge of pad, 1 1/2 inches ± 1/4 inch from edge.	301	SSa-1	1-2	70-2	70-2
	c. Stitch with two rows of zigzag stitching 1 ± 1/4 inch gage, with the outside row 1 1/2 inches ± 1/4 inch (at center of pad) from where the concave edge will finish and with both rows backtacked at both sides of area where pad will be cut in half (operation 2.d and figure 2). The zigzag stitching shall be controlled in order to form a concave effect in the finished pad.	304	SSv-2	1-2	70-2	70-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

TABLE II. Manufacturing operations requirements - Continued

No.	Requirements	Stitch type	Seam and stitching type	Stitches per inch	Thread	
					Needle	Bobbin/ Looper
	Type II, Shoulder Pad - Continued					
2.	Construction: - continued					
	d. Cut pad in half on the bias, cutting out a portion at the center, totaling 3/4 to 1 inch wide at the center and tapering to nothing at the ends. In cutting, a 1/8 to 1/2 inch section shall remain uncut to retain pad in pairs.					
	e. Notch felt 4 inches back from the front end of pad.					
	Type III, class 1, Shoulder Pad					
1.	Cutting:					
	a. Cut the felt for the top (2-pieces) and the single piece cheesecloth bottom on the bias to conform to contour and measurements in 3.5.5 and figure 3.					
	b. Cut two plies of batting. Cut the first ply 3/4 inch smaller than the felt top and cut the second ply 1/2 inch smaller than the first ply of batting.					
	c. Cut the interlining piece 5 inches ± 1/8 inch square.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

TABLE II. Manufacturing operations requirements - Continued

No.	Requirements	Stitch type	Seam and stitching type	Stitches per inch	Thread: Needle	Thread: Bobbin/ Looper
Type III, class 1, Shoulder Pad - Continued						
2.	Construction:					
	a. Join felt pieces, with center edges abutted, to form top ply.	304 or 404	FSa-1 FSa-1	6-10 6-10	70-2 70-2	70-2 70-2
	b. Superimpose materials in the following sequence, starting from bottom: (1) Cheesecloth bottom. (2) Batting (1st ply, operation 1.b). (3) Buckram interlining. Place in center of pad on the bias. (4) Batting (2nd ply, operation 1.b). (5) Felt top.					
	c. Baste with one row of stitching around curved edge of pad, 1 1/2 inches ± 1/4 inch from edge.	301	SSa-1	2-6	70-2	70-2
	d. Stitch with two rows of zigzag stitching 1 ± 1/4 inch gage with the outside row 1 1/2 inches ± 1/4 inch (at center pad) from where concave edge will finish, and with both rows backtacked at both sides of area where pad will be cut in half (operation 2.e and figure 3). The rows of zigzag stitching shall be controlled in order to form a concave effect in the finished pad.	304	SSv-2	1-3	70-2	70-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

TABLE II. Manufacturing operations requirements - Continued

No.	Requirements	Stitch type	Seam and stitching type	Stitches per inch	Thread: Needle	Thread: Bobbin/ Looper
	Type III, class 1, Shoulder Pad - Continued					
	2. Construction: - continued					
	e. Cut pad in half on the bias, cutting out a portion at the center totaling 3/4 to 1 inch wide at the center and tapering to nothing at the ends. In cutting, a 1/8 to 1/2 inch section shall remain uncut to retain pad in pairs.					
	Type III, class 2, Shoulder Pad					
	1. Cutting:					
	a. Cut the felt for the top and the cheesecloth for the bottom on the bias to conform to contour and measurements in 3.5.6.					
	b. Shingle required matted noils interlining to proper size to conform to measurement of finished pad.					
	2. Construction:					
	a. Superimpose materials in the following sequence starting from the bottom:					
	(1) Cheesecloth bottom.					
	(2) Shingled matted noils interlining with a graduated thickness with the largest area against the bottom cheesecloth.					
	(3) Felt top.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

TABLE II. Manufacturing operations requirements - Continued

No.	Requirements	Stitch type	Seam and stitching type	Stitches per inch	Thread	
					Needle	Bobbin/ Looper
Type III, class 2, Shoulder Pad - Continued						
2.	Construction: - continued					
	b. Baste with one row of stitching around curved edge 1/2 ± 1/8 inch from edge.	301	SSa-1	2-4	70-2	70-2
	c. Stitch with two rows of zigzag stitching 3/4 ± 1/8 inch gage with the outside row 1 3/4 inches ± 1/4 inch from the center of the tapered end of the pad and with both rows backtacked at both sides of area where the pad will be cut in half.	304	SSv-2	2-4	70-2	70-2
	d. Notch felt 4 inches back from the front end of pad.					
Type III, class 4, Shoulder Pad						
1.	Cutting:					
	a. Cut felt for the top, a layer of interlining, a layer of wadding and bottom layer of print cloth to conform to contour and measurements in 3.5.8 and figure 4.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

TABLE II. Manufacturing operations requirements - Continued

No.	Requirements	Stitch type	Seam and stitching type	Stitches per inch	Thread	
					Needle	Bobbin/ Looper
Type III, class 4, Shoulder Pad - Continued						
2.	Construction:					
	a. Superimpose material in the following sequence, starting from the bottom:					
	(1) Print cloth bottom.					
	(2) Wadding.					
	(3) Interlining.					
	(4) Felt top.					
	b. The top and bottom layer shall extend the full size of the shoulder pads. The other layers shall be singled to produce suitable and proper graduation of thickness.					
	c. Baste with one row of stitching around curved edge of the pad, 1/2 ± 1/8 inch from the edge.	101 or 301	SSa-1 SSa-1	2-4 2-4	70-2 70-2	70-2 70-2
	d. Stitch with one row of zigzag stitching 3/16 to 1/4 inch gage.	304	SSv-1	2-4	70-2	70-2

Source: https://assist.dla.mil -- Downloaded: 2026-04-18T05:27Z
Check the source to verify that this is the current version before use.

TABLE II. Manufacturing operations requirements - Continued

No.	Requirements	Stitch type	Seam and stitching type	Stitches per inch	Thread	
					Needle	Bobbin/ Looper
Type IV, Sleeve-head						
1.	Cutting:					
	a. Cut cheesecloth and one layer of wadding combined on the bias, in strips to conform to finished measurement in 3.5.9.					
	or					
	b. If polyester-needlepunch fabric is used (3.2.7), cut on the bias, in strips to conform to finished measurements in 3.5.9.					
2.	Construction:					
	a. Fold one edge of the cheesecloth-wadding strips (wadding on inside) lengthwise to form a 1 inch fold and stitch through all plies 1/2 ± 1/8 inch from folded edge (see figure 5).	301 or 401	EFa-1 EFa-1	3-4 3-4	70-2 70-2	70-2 70-2
	or					
	b. Fold one edge of the polyester-needlepunch fabric strip lengthwise to form a 1 inch fold and stitch through all plies 1/2 ± 1/8 inch from folded edge (see figure 5).	301 or 401	EFa-1 EFa-1	3-4 3-4	70-2 70-2	70-2 70-2

Source: https://assist.dla.mil -- Downloaded: 2026-01-18T05:27Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this document where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

* 4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this document shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirement in the document shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

* 4.1.2 Responsibility for dimensional requirements. Unless otherwise specified in the contract or purchase order, the contractor is responsible for assuring that all specified dimensions have been met. When dimensions cannot be examined on the end item, inspection shall be made at any point or at all points in the manufacturing process necessary to assure compliance with all dimensional requirements.

4.1.3 Certificates of compliance. When certificates of compliance are submitted, the Government reserves the right to inspect such items to determine the validity of the certification.

4.2 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be performed in accordance with MIL-STD-105.

4.2.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced documents unless otherwise excluded, amended, modified, or qualified in this document or applicable purchase document.

4.2.1.1 Component testing. Components shall be tested for the characteristics specified in FED-STD-191, wherever applicable, and as listed in table V. Units for expressing lot sizes and sample units for testing shall be as specified in table III, and sampling shall be as specified in table IV.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

Where the determinations per sample unit and results reported as are not specified, they shall be as indicated in the applicable test method. All requirements are applicable to the sample unit. All test reports shall contain the individual values used in expressing the final results. The lot shall be unacceptable if one or more sample units fail to meet any test requirement specified.

TABLE III. Lot sizes and sample units

Component	Lot size expressed as	Sample unit for testing
Cloth, cotton print	yards	1/2 yd full width
Cheesecloth, 2.0 to 2.5 oz	yards	1/2 yd full width
Felt, cotton/wool	yards	1/2 yd full width
Felt, cotton, wool, rayon	yards	1/2 yd full width
Batting cotton	ounces or yards	1/4 oz or 1/4 yd full width
Batting wool	ounces or yards	1/4 oz or 1/4 yd full width
Matted noils	ounces or yards	1/4 oz or 1/4 yd full
Wadding, cotton, bleached	yards	1/2 yd full width width
Polyester-needlepunch	yards	1/2 yd full width

TABLE IV. Sampling

Lot size (lot unit)	Sample size (sample unit)
800 or less	2
801 to 22,000 inclusive	3
22,001 and over	5

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

TABLE V. Component testing

Component	Characteristic	Requirement paragraph	Test methods	Determinations per sample unit	Results reported as
Cloth, print	Material identification	3.2.1	1200 1/	-	-
	Yarns per inch	3.2.1	5050	-	-
	Weight	3.2.1	5041	-	-
Cheesecloth	Material identification	3.2.2.2	1200 1/	-	-
	Weight	3.2.2.2	5041	-	-
Felt	Material identification	3.2.3	1200 1/	-	-
	Color (type II and type III, classes 2 and 4)	3.2.3	Visual	1	Pass/ fail
	Weight (oz per square yard)	3.2.3	5041	-	-
	Wool content	3.2.3	2100	-	-
	Thickness	3.2.3	5030	-	-
Batting	Material identification	3.2.4	1100 1/	-	-
	Weight (oz per sq yard, type II only)	3.2.4.2	5041	-	-
	Staple length (type II only)	3.2.4.2	1/	-	-
	Percentage of weight of batting to finished pad (type III, class 1 only)	3.2.4.3	1/	-	-
	Wool content (type III, class 1 only)	3.2.4.3	2101 1/		

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

TABLE V. Component testing - Continued

Component	Characteristic	Requirement paragraph	Test methods	Determinations per sample unit	Results reported as
Interlining, buckram	Material identification	3.2.5.2	1200 1/	-	-
	Yarns per inch	3.2.5.2	5050	-	-
Interlining, matted noils	Material identification	3.2.5.4	1100 1/	-	-
	Wool content	3.2.5.4	2101	-	-
Wadding	Material identification	3.2.6	1200 1/	-	-
	Weight	3.2.6	5041	-	-
	Color	3.2.6	Visual	1	Pass/ fail
	Top and bottom surfaces glazed	3.2.6	Visual	1	Pass/ fail
	Cotton content	3.2.6	2100 2/	-	-
Polyester-needlepunch	Material identification	3.2.7	1/	-	-
	Color	3.2.7	Visual	1	Pass/ fail
	Weight	3.2.7	5041	-	-
	Stiffness Machine direction Cross direction	3.2.7	5202	-	-
	Breaking strength Machine direction Cross direction	3.2.7	5100	-	-
	Thickness	3.2.7	5030	-	-

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:27Z
Check the source to verify that this is the current version before use.

TABLE V. Component testing - Continued

1/	The contractor shall submit a certificate of compliance for these characteristics.
2/	Calculation of cotton content shall be as follows: $\text{Cotton, percent} = \frac{O - R}{O} \times 100$ where O = Weight of original dry specimen, and R = Residue.

4.2.2 End item visual examination. The end item shall be examined for the defects listed in table VI. The lot size shall be expressed in units of pads. The sample unit shall be one pair of pads. The inspection level shall be S-4 and the acceptable quality level (AQL), expressed in terms of defects per hundred units, shall be 10.0.

TABLE VI. End item visual defects

Examine	Defect
Material defects and damages	One or more large holes or any seriously weakening defect Any deep cut, tear, mend, or burn
NOTE:	Small holes, tight slubs, and other nonweakening defects shall not be considered defects
Component and assembly	Any component part or required operation omitted
Cleanness	Any spot or stain clearly noticeable

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:27Z
Check the source to verify that this is the currentversion before use.

TABLE VI. End item visual defects - Continued

Examine	Defect
Seams and stitching	Outside fabric pleated in stitching Pad deformed due to improper shingling of wadding, batting, or improper placement of print cloth and cheesecloth
Seam and stitch type	Wrong seam or stitch type
Stitch tension	Tight tension (stitches break when strain is applied in the direction of the seam) Loose tension, resulting in a poorly formed seam
Open seams	Any seam open more than 2 inches
NOTE:	A seam is classified as open when one or more stitches are broken or when two or more continuous skipped stitches or run-offs occur.
Stitches per inch	One or more stitches less than minimum specified
NOTE:	To be scored only when condition exists on major portion of seam.
Construction	Component material not superimposed in sequence as specified in table I (all types) Straight basting stitch around curved edge of pad omitted (Types I, II, and III) Zigzag stitching through body of pad omitted (Types I, II, and III) Outside row of zigzag stitching more or less than specified distance from cut edge of pad at center (Types I, II, and III) Ends of zigzag stitching not tacked (Types I, II, and III) Pad not cut in half, except at one end (Types I, II, and III) Notch on upper side of pad omitted (Type I, class 1, type II and type III, classes 2 and 3)

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:27Z
Check the source to verify that this is the current version before use.

TABLE VI. End item visual defects - Continued

Examine	Defect
Construction - continued	Portion at center not cut to form concave effect (Types I, II, and III) Filler not shingled as specified (Types I and III) Rows of zigzag stitching spaced less than 3/4 or more than 1 1/4 inches apart (Types I, II, and III) Interlining not cut as specified (Types I and III)
Type I, class 1	Basting stitch around curved edge less than 1/2 inch or more than 1 inch from edge of pad
Type I, classes 2 and 3, and type III, classes 2, 3, and 4	Basting stitch around curved edge less than 3/8 inch or more than 5/8 inch from edge of pad
Type II	Basting stitch around curved edge less than 1 1/4 inches or more than 1 3/4 inches from edge of pad
Type III, class 1	Basting stitch around curved edge less than 1 1/4 inches or more than 1 3/4 inches from edge of pad Felt top not made of two pieces
Type IV	Cheesecloth and wadding (combined), or polyester-needlepunch fabric cut on straight of fabric Row of stitching less than 3/8 inch or more than 5/8 inch from folded edge

4.2.3 End item dimensional examination. The end item shall be examined for conformance to the dimensions specified in 3.5. Any dimension not within the specified tolerance shall be classified as a defect. The lot size shall be expressed in units of pads. The sample unit shall be one pair of pads. The inspection level shall be S-4 and the AQL, expressed in terms of defects per hundred units, shall be 10.0.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

4.2.4 End item testing. The end item shall be tested as specified in table VII. All requirements shall be applicable to the individual sample unit. The sample unit for testing the weight characteristics of the type III pad shall be five pairs and for testing the thickness characteristics of types I, II, and III pads shall be one pair each. The sample size shall be as specified in table IV. The lot shall be unacceptable if one or more units fail to meet any of the requirements specified.

TABLE VII. End item testing

End item	Characteristic	Requirement paragraph	Test methods	Determinations per sample unit	Results reported as
Pad, complete (types I, II and III)	Thickness	3.5.1	4.3.1	1	Pass/fail
Shoulder pad, complete	Weight per pair	3.5.2, 3.5.3, and 3.5.6	Scale	5	Average of 5 deteminations to nearest 0.001 ounce for type I, classes 2 and 3 and to the nearest 0.01 for type III, class 2

4.2.5 Packaging examination. The fully packaged end items shall be examined for the defects listed below. The lot size shall be expressed in units of shipping containers. The sample unit shall be one shipping container fully packaged. The inspection level shall be S-2 and the AQL, expressed in terms of defects per hundred units, shall be 2.5.

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:27Z
Check the source to verify that this is the current version before use.

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application
Materials	Any component missing, damaged, or not as specified
Workmanship	Inadequate application of components, such as incomplete sealing or closure of flap, improper taping, loose strapping, or inadequate stapling Bulged or distorted container
Content	Weight of contents of each shipping container exceeds maximum specified

* 4.2.6 Palletization examination. The fully packaged and palletized end items shall be examined for the defects listed below. The lot size shall be expressed in units of palletized unit loads. The sample unit shall be one palletized unit load, fully packaged. The inspection level shall be S-1, and the AQL, expressed in terms of defects per hundred units, shall be 6.5.

Examine	Defect
Finished dimensions	Length, width, or height exceeds specified maximum requirement
Palletization	Pallet pattern not as specified Interlocking of loads not as specified Load not bonded with required straps as specified
Weight	Exceeds maximum load limits
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application

4.3 Methods of inspection.

* 4.3.1 Thickness. The thickness of the pad shall be measured at the specified locations with a platform micrometer having a 1 to 1 1/8 inch diameter presser foot and using a pressure of 0.1 pound per square inch. The reading for the thickness shall be taken after an interval of 1 minute under load.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Preservation. Preservation shall be level Commercial.

5.1.1 Commercial. Pads shall be preserved in accordance with ASTM D 3951.

5.2 Packing. Packing shall be level A, B, or Commercial, as specified (see 6.2).

* 5.2.1 Level A packing. Pads of one description only, preserved as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC-L, grade V2s of PPP-B-636. Each shipping container shall be sized to be palletizable in accordance with MIL-STD-147. The inside of each fiberboard shipping container shall be fitted with a box liner conforming to type CF, class weather-resistant, variety DW, grade V15c of PPP-B-636. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to A-A-203. Each shipping container shall be closed in accordance with method III, waterproofed in accordance with method V, and reinforced as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.2.5. When pads are preserved in paperboard boxes, top and bottom kraft paper sheets and box liners shall not be required. Weight of the contents of each shipping container shall not exceed 65 pounds. Shipping containers shall be arranged in unit loads in accordance with MIL-L-35078 for the type and class of load specified (see 6.2). Strapping shall be limited to nonmetallic strapping, except for type II, class F loads.

* 5.2.2 Level B packing. Pads of one description only, preserved as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC-L, type CF (variety SW) or type SF, class domestic, grade 200 of PPP-B-636. Each shipping container shall be sized to be palletizable in accordance with MIL-STD-147. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class domestic, variety DW, grade 200 of PPP-B-636. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to A-A-203. Each shipping container shall be closed in accordance with method II as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.2.5. When pads are preserved in paperboard boxes, top and bottom kraft paper sheets and box liners shall not be required. Weight of the contents of each shipping container shall not exceed 65 pounds.

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:27Z
Check the source to verify that this is the current version before use.

5.2.2.1 Weather-resistant fiberboard containers. When specified (see 6.2), the shipping container shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with method III, as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.2.5.

* 5.2.3 Commercial packing. Pads, preserved as specified in 5.1, shall be packed in accordance with ASTM D 3951.

* 5.3 Palletization. When specified (see 6.2) pads packed as specified in 5.2.2 and 5.2.3, shall be palletized in accordance with load type 1a of MIL-STD-147. Pallet type shall be type 1 (4-way entry), type IV or type V of MIL-STD-147. Pallets shall be fabricated from wood groups I, II, III or IV of MIL-STD-731. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means K and L or film bonding means O or P. Pallet pattern shall be in accordance with the appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course.

5.4 Marking. In addition to any special marking required by the contract or purchase order, unit packs (when applicable), shipping containers, and palletized unit loads shall be marked in accordance with MIL-STD-129 or ASTM D 3951, as applicable.

6. NOTES

6.1 Intended use. Shoulder pads and sleeve-head are intended for use in Department of Defense men's and women's coats, overcoats, and jackets.

6.2 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this document.
b. Type and class of pads required (see 1.2).
c. Selection of applicable levels of packing (see 5.2).
d. Type and class of unit load required (see 5.2.1).
e. When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).
f. When palletization is required (see 5.3).

6.3 Standard sample. For access to samples, address the contracting activity issuing the invitation for bids.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

6.4 Subject term (key word) listing.

Pad, shoulder
Pad, sleeve-head

6.5 Changes from previous issue. The margins of this document are marked with an asterisk (*) to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only, and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content, as written, irrespective of the marginal notations and relationship to the last previous issue.

Custodians:

Army - GL
Navy - NU
Air Force -11

Preparing activity:

Army - GL

Project No. 8315-0322

Review activities:

Army - MD
Air Force - 99, 82
DLA - CT

User activities:

Navy - CG, MC

☆ U.S. GOVERNMENT PRINTING OFFICE: 1987-704-036/72804

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

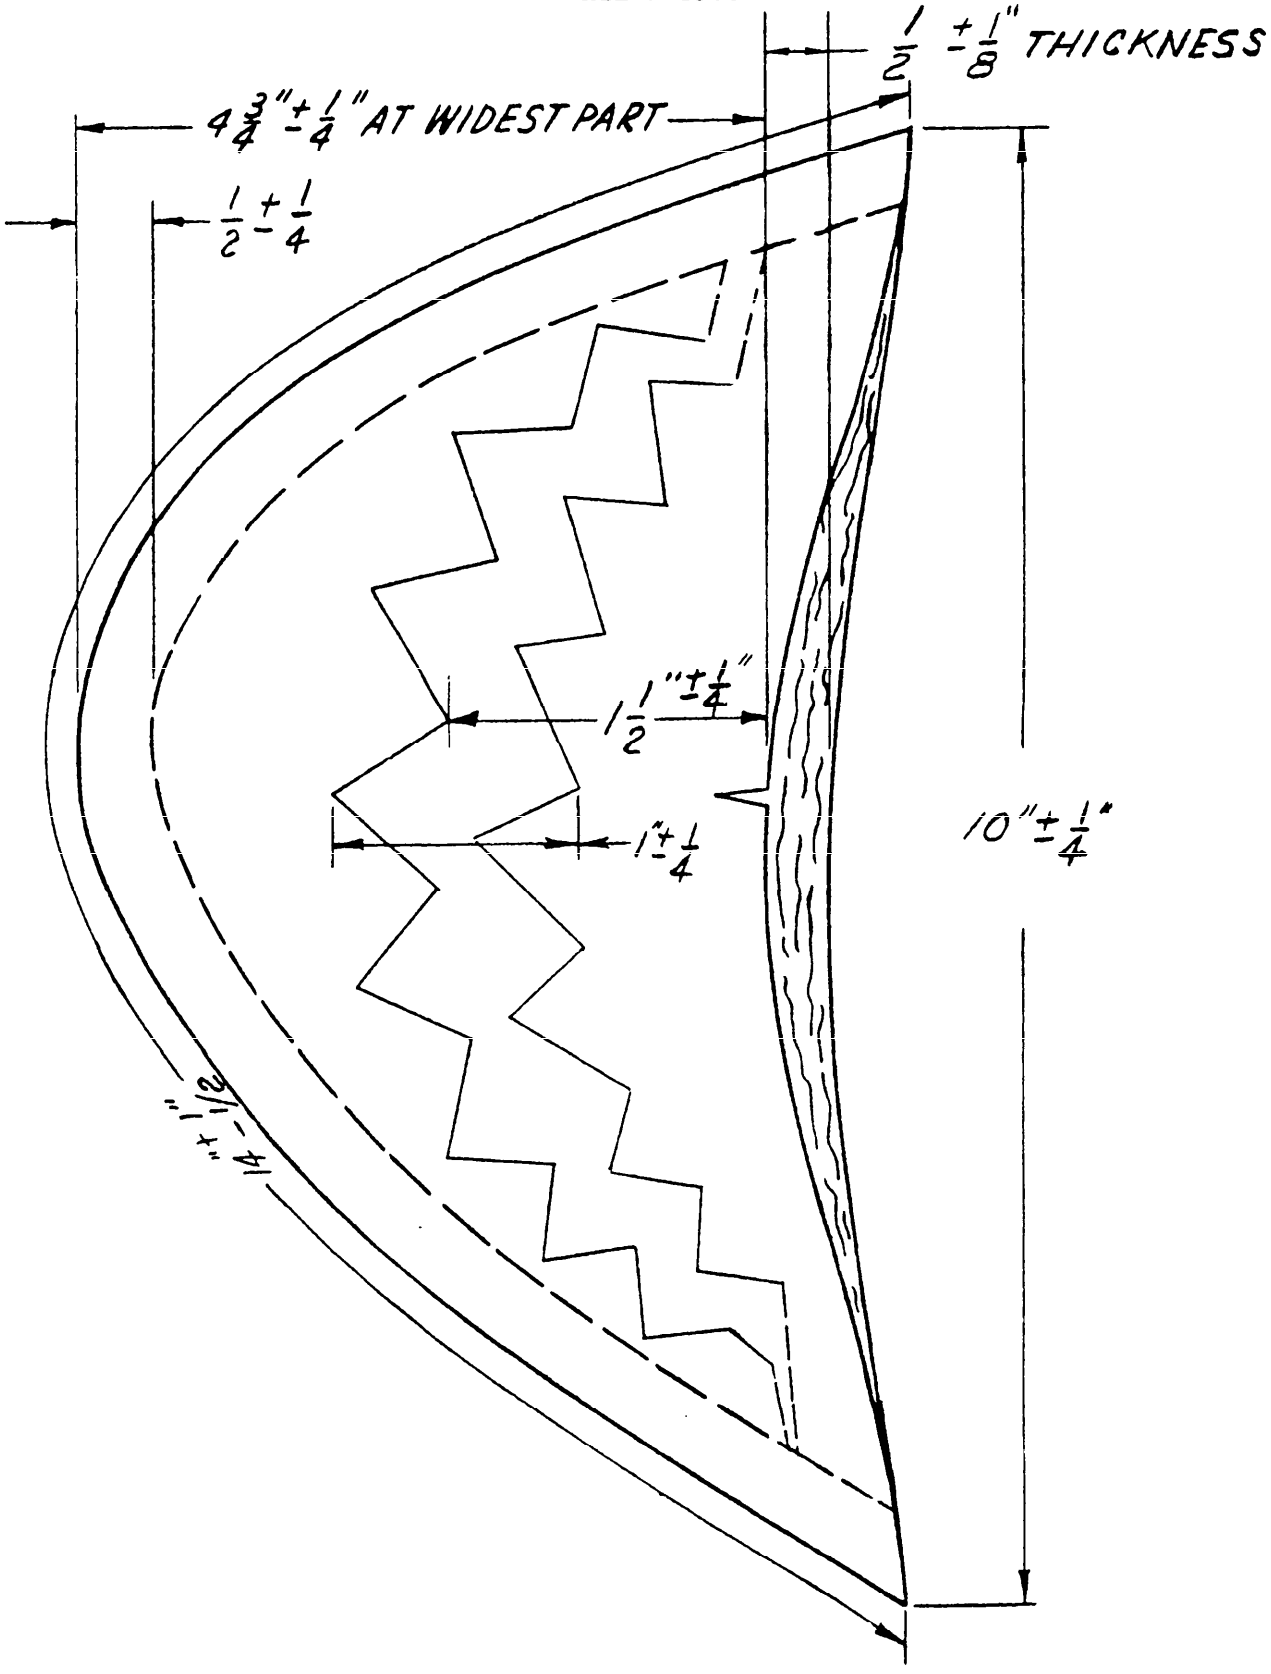


FIGURE 1. Pads, shoulder, man's type I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

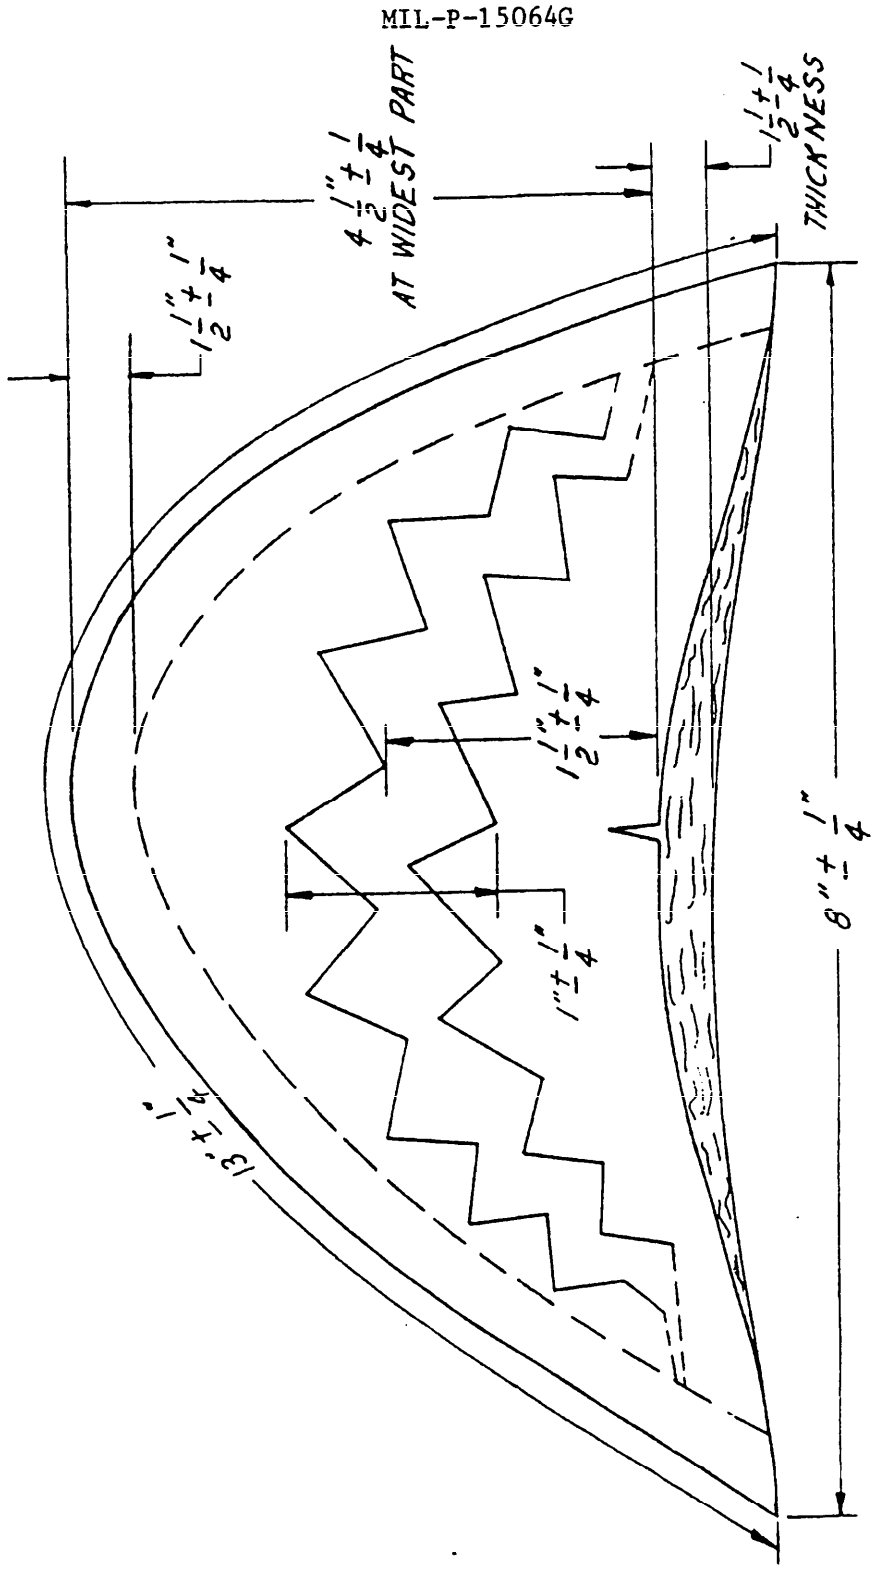


FIGURE 2. Pads, shoulder, man's (navy evening dress uniform), type II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

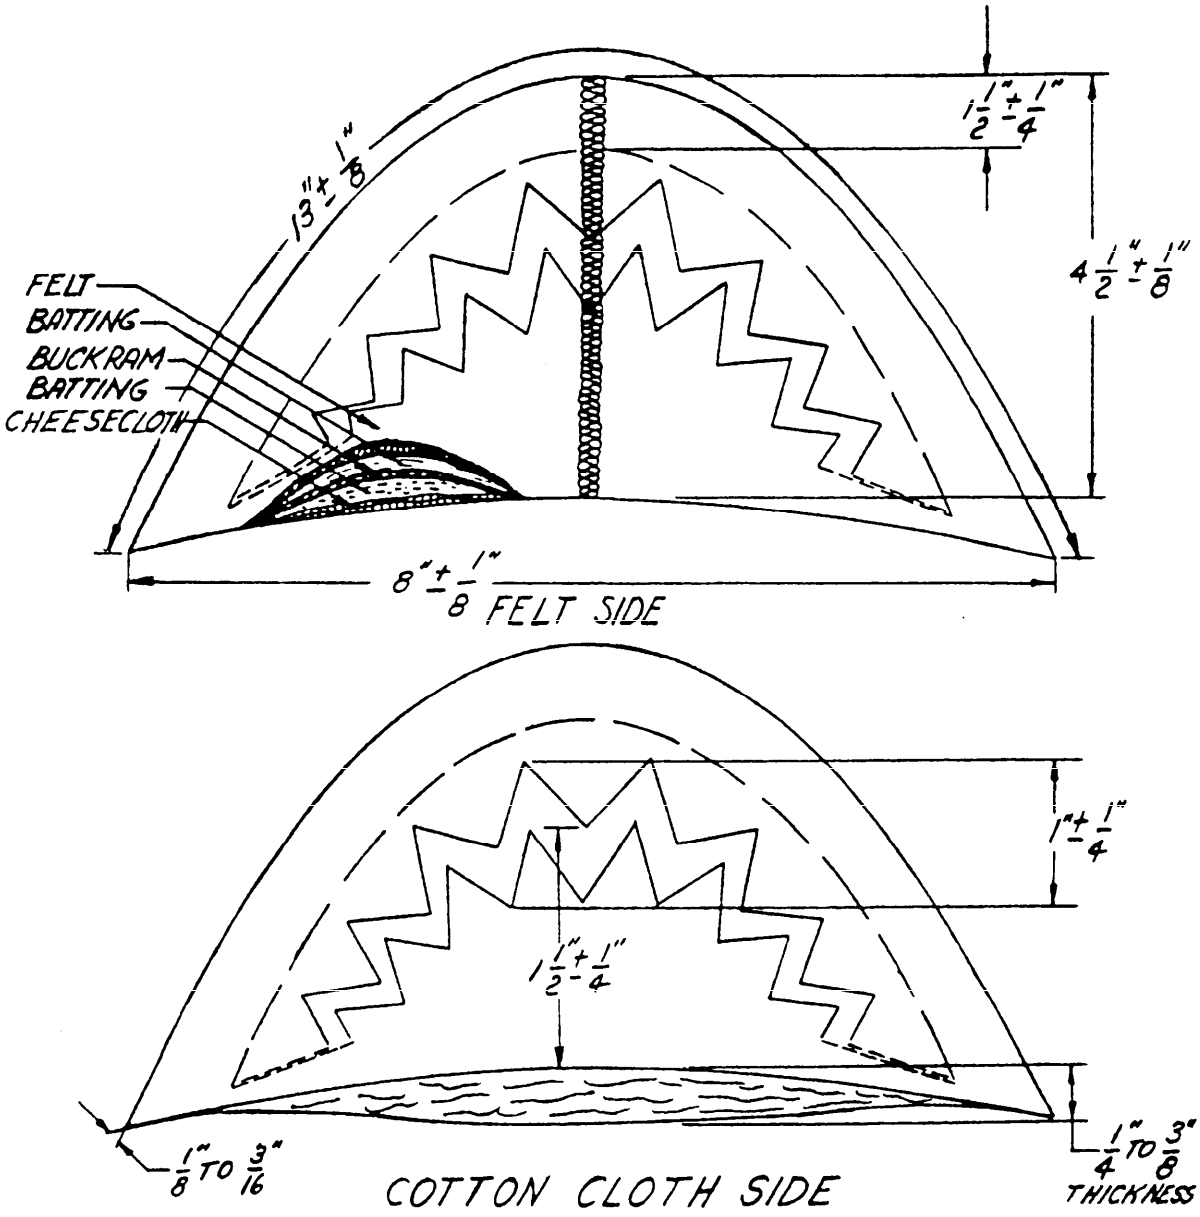


FIGURE 3. Pads, shoulder, woman's, type III.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

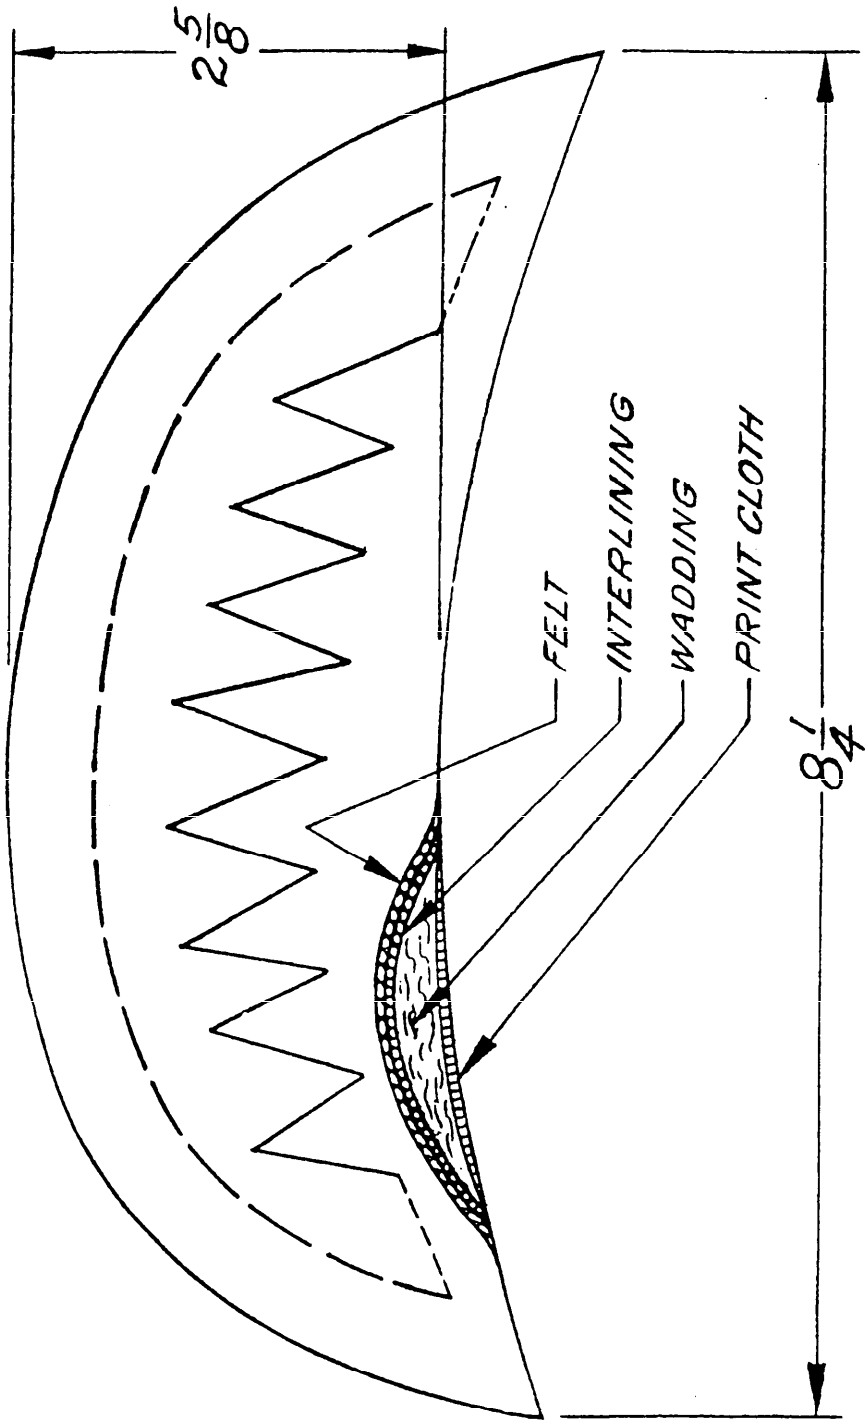


FIGURE 4. Pads, shoulder, woman's, type III, class 4.

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:27Z
Check the source to verify that this is the current version before use.

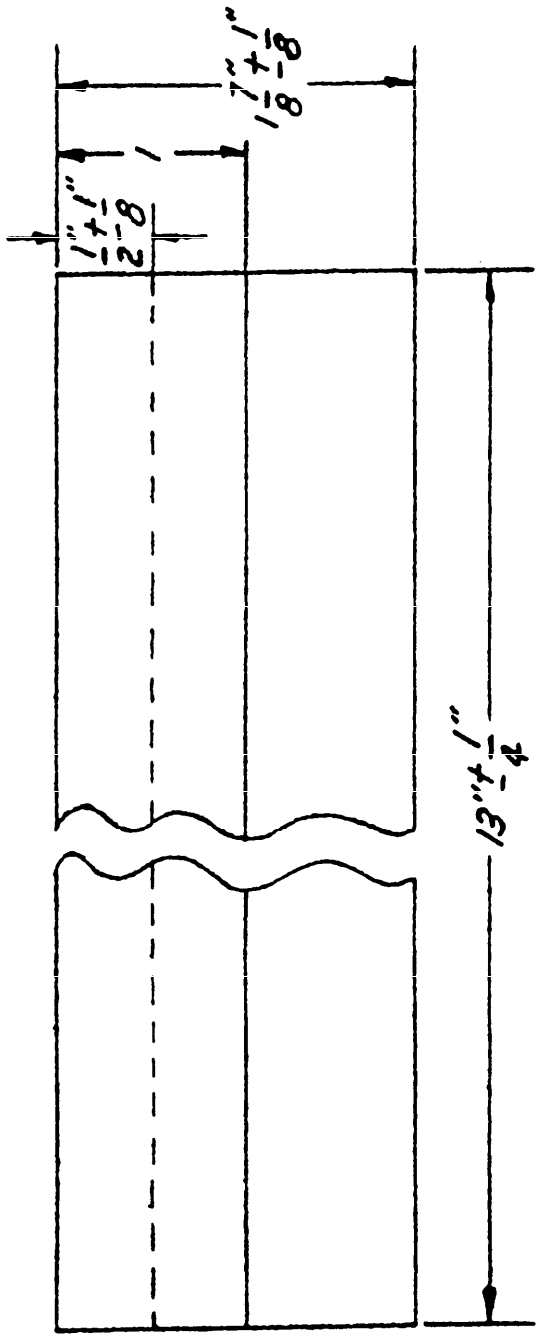


FIGURE 5. Sleeve-head, man's and woman's, type IV.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

US Army Natick Research, Development, and
Engineering Center
Natick, MA 01760-5014

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300
STRNC-ES

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Natick Research, Development,
and Engineering Center
ATTN: STRNC-ES
Box 14A
Natick, MA 01760-5014

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-P-15064G	Pads, Shoulder and Sleeve-Head

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil – Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.