INCH-POUND

MIL-DTL-15064H
17 September 2019
SUPERSEDING
MIL-P-15064G
31 March 1987

DETAIL SPECIFICATION

PADS, SHOULDER AND SLEEVE-HEAD

This document is approved for use by all Departments and Agencies of the Department of Defense (DoD).

1. SCOPE

1.1 Scope. This specification covers the requirements for shoulder pads and sleeve-head pads used in clothing items worn by the military Services.

1.2 Classification. The pads will be available in the following types and classes. All dimensions specified below are in inches. Additional dimensions are specified in Table II.

1.2.1 Types and Classes.

Type I		Pads, Shoulder, Large
Class 1	-	Length 10, width 4-3/4, thickness 1/2
Class 2	-	Length 9-1/2, width 4-1/2, thickness 1/2
Class 3	-	Length 10-3/4, width 4-3/4, thickness 1-3/8
Class 4	-	Length 10-3/4 , width 4-3/4, thickness 7/8
Type II		Length 8, width 4-1/2, thickness 1-1/2
Type III		Pads, Shoulder, Small
Class 1	-	Length 8, width 4-1/2, thickness 1/4-3/8, felt top
Class 2		Length 9-1/2, width 4-3/4, thickness 1/4 - 3/8, felt top
Class 3	-	Length 8, width 4-1/2, thickness 1/4 - 3/8, cotton top
Class 4	-	Length 8-1/4, width 2-5/8

Comments, suggestions, or questions on this document should be addressed: Attn: DLA Troop Support, 700 Robbins Street, Philadelphia, PA 19111-5096. Since contact information can change, verify the currency of the address information using Acquisition Streamlining and Standardization Information System (ASSIST) online database https://assist.dla.mil.

AMSC N/A FSC 8315

DISTRIBUTION STATEMENT A. Approved for public release, distribution unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

Type IV Sleeve-head, Man's and Woman's
Class 1 - Woven cover cloth
Class 2 - Nonwoven cover cloth

2. APPLICABLE DOCUMENTS.

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract (see 6.2).

COMMERCIAL ITEM DESCRIPTIONS

A-A-52094 - Thread, Cotton
A-A-52105 - Cloth, Interlining, Cotton or Synthetic Warp, and Spun Hair-Wool or Rayon Filling
A-A-59992 - Cloth, Interfacings, Woven, Cotton and Synthetic

(Copies of these documents are available online at https://quicksearch.dla.mil.)

2.3 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract (see 6.2).

AMERICAN ASSOCIATION OF TEXTILE CHEMISTS AND COLORISTS (AATCC)

AATCC Test Method 20 - Fiber Analysis: Qualitative
AATCC Test Method 20A - Fiber Analysis: Quantitative

(Copies of these document are available online at https://www.aatcc.org.)

AMERICAN SOCIETY FOR QUALITY (ASQ)

ASQ/ANSI Z1.4 - Sampling Procedures and Tables for Inspection by Attributes

(Copies of this document are available online at https://asq.org)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

ASTM INTERNATIONAL

ASTM D1388	- Standard Test Method for Stiffness of Fabrics
ASTM D1440	- Standard Test Method for Length and Length Distribution of Cotton Fibers (Array Method)
ASTM D1777	- Standard Test Method for Thickness of Textile Materials
ASTM D3775	- Standard Test Method for End (Warp) and Pick (Filling) Count of Woven Fabrics
ASTM D3776/D3776M	- Standard Test Methods for Mass Per Unit Area (Weight) of Fabric
ASTM D3990	- Standard Terminology Relating to Fabric Defects
ASTM D5034	- Standard Test Method for Breaking Strength and Elongation of Textile Fabrics (Grab Test)
ASTM D6193	- Standard Practice for Stitches and Seams

(Copies of these document are available online at https://www.astm.org)

2.4 Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Unless a specific exemption has been obtained, nothing in this document supersedes applicable laws and regulations.

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), a sample shall be subjected to first article inspection in accordance with 4.2.

3.2 Recycled, recovered, environmentally preferable, or biobased materials. Recycled, recovered, environmentally preferable, or biobased materials should be used to the maximum extent possible, provided that the material meets or exceeds the operational and maintenance requirements, and promotes economically advantageous life cycle costs.

3.3 Design. The shoulder pads and sleeve-heads shall consist of cover materials, interfacing and padding/wadding. Materials shall be cut and the pads shall be constructed such that the end items meet all dimensional and weight (see Table II) and physical requirements of this specification, as appropriate to the type and class being produced.

3.3.1 Figures. Figures 1 and 2 are furnished for informational purposes only. In the event of any inconsistencies between the written specification and Figures 1 and 2, the written specification shall control.

3.4 Materials. Shoulder pads and sleeve-heads shall be constructed from the materials specified for the type and class being produced. If a vendor would like to use a material other than those specified in this section, they shall contact the contracting authority for authorization prior to production. Materials used in shoulder pads and sleeve-heads shall be tested as specified in 4.6.2. Unless otherwise specified herein or in the contract or purchase order, the color of the

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

materials shall be natural or white. Shoulder pads and sleeve heads shall be constructed with adequate layers of appropriate materials to meet the dimensional and weight requirements (see Table II). Vendors shall identify the material content of all fabrics used in the construction of the shoulder pads and sleeve heads to allow for the appropriate testing to be performed.

3.4.1 Basic cloth.

3.4.1.1 Woven cloth (specified classes).

3.4.1.1.1 Cotton cloth. Unless otherwise specified in the contract or purchase order, the cloth for Type I, Classes 1 and 4; Type II; and Type III, Class 4, shall be unbleached cotton, shall have a minimum yarns per inch of 54 warp and 42 filling, and a minimum weight of 1.8 ounces per square yard. Alternate materials (see 3.4.1.1.2 and 3.4.1.2) may be used. Cloth for Type I, Classes 2 and 3; and Type III, Class 3 shall have a minimum yarns per inch of 60 warp and 48 filling and a weight of 2.0 - 3.5 ounces per square yard. Type IV sleeve-head cloth shall be either fabric specified above or, as an alternate, the Type IV cloth may be 100% cotton muslin with a minimum of 44 warp and 36 filling yarns per square inch.

3.4.1.1.2 Polyester/cotton cloth (Type I, Classes 1 and 4; Type II; and Type III, Class 4. As an alternate for Type I, Classes 1 and 4; Type II; and Type III, Class 4, a 50/50 (±5%) polyester/cotton blend cloth with a minimum yarns per inch of 54 warp and 35 filling, and a minimum weight of 1.8 ounces per square yard, may be used.

3.4.1.2 Needlepunch cloth. As an alternate to woven cloth for all specified Types and Classes, needlepunch material with a weight of 3.2 – 4.0 ounces per square yard for sleeve-head construction and 4.0 - 4.5 ounces per square yard for shoulder pad construction may be used. Stiffness of needlepunch cloth shall be 0.003 to 0.008 load pounds in the machine direction and 0.004 to 0.009 load pounds in the cross-machine direction. The minimum breaking strength shall be 6.0 pounds in the machine direction and 3.0 pounds in the cross-machine direction, and the thickness shall be a minimum of 0.050 inches. Needlepunch cloth may be used as the bottom layer for Type I, Class 1 shoulder pads; Type III, Classes 1 and 2 shoulder pads; and Type IV sleeve-heads.

3.4.2 Felt. The felt used in Type I, Type II, and Type III pads shall be a blend of cotton/wool; cotton/rayon; or cotton/wool/rayon. Felt shall meet the requirements in Table I when tested as specified in 4.6.2.

TABLE I. Felt.

	Pads				
	Type I	Type II	Type III		
	Class 4		Class 1	Class 2	Class 3
Weight (oz./yd^2)	2.1 – 2.4	4.2 - 4.3	≥ 6.0	3.0 – 4.0	2.1 – 2.4
Thickness, inches	0.020 (±0.003)	0.040 (±0.005)	0.064 (±0.006)	≥ 0.030	0.020 (±0.003)
Wool content (%), (dry weight) 1/	30	30	40	50	30

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

1/ When applicable.

3.4.3 Batting. The batting shall meet the following requirements when tested as specified in 4.6.3. As an alternate, needlepunch cloth (see 3.4.1.2) may be used in place of batting to provide thickness and shape to shoulder pads.

3.4.3.1 Type I, Classes 2 and 3; and Type III, Class 3 pads. The batting for Type I, Classes 2 and 3; and for Type III, Class 3 pads shall be pure cotton, thoroughly cleaned, free from pills and neps.

3.4.3.2 Type II pads. The batting for Type II pads shall be a commercial batting made of harsh fiber cotton with a minimum staple length of 1/2 inch, weighing approximately 14 ounces per square yard.

3.4.3.3 Type III, Class 1. The batting for Type III, Class 1 pads shall be made of garnetted fiber, containing not less than 90 percent wool dry weight.

3.4.4 Interfacing. When used, interfacing material shall be one of the following configurations. Unless specified in the contract or order, any of these materials may be used with all types and classes. If the required dimensions and a concave shape are achieved through the use of needlepunch fabric (see 3.4.1.2), interfacing may be omitted.

3.4.4.1 Cotton warp with spun hair or rayon filling. Interfacing consisting of cotton warp and spun animal hair/wool or rayon filling shall conform to A-A-52105.

3.4.4.2 Buckram. Buckram shall conform to A-A-59992.

3.4.4.3 Matted noils. Matted noils shall consist of wool or a mixture of approximately 90 percent wool and the remainder cotton or cotton and synthetic fibers.

3.4.5 Wadding. Shoulder pads shall use wadding or needlepunch fabric (see 3.4.1.2) to provide fullness and thickness. If needlepunch fabric is used and provides adequate fullness to meet dimensional requirements, the wadding specified below may be omitted. As an alternate, the Type IV sleeve-head filler may be 100% pre-needled cotton filler, weighing between 3.0 and 3.5 ounces per square yard, inclusive.

3.4.5.1 Wadding for Type I, Class 1 shoulder pads and Type IV sleeve-heads. The wadding for Type I, Class 1 shoulder pads and Type IV sleeve-heads shall be made of either 100 percent cotton or a blend of carded cotton and synthetic fibers. The blend shall contain not less than 40 percent bleached cotton and not more than 60 percent other white synthetic fibers when tested as specified in 4.2.1.1. The wadding shall be natural or white in color and weigh not less than 2.8 ounces per square yard with a glazed finish on top and bottom surfaces.

3.4.5.2 Optional configuration for Type IV sleeve-heads. As an option, Type IV sleeve-heads may be made of fabric specified in 3.4.1.2, in which case, the wadding is not required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

3.4.5.3 Wadding for Type III, Class 4 shoulder pads. The wadding for Type III, Class 4 shoulder pads shall be made of carded, bleached cotton with the top surface glazed. The wadding shall be white, weigh not less than 2.0 ounces per square yard, and shall contain not less than 85 percent cotton and not more than 15 percent other fibers when tested as specified in Table VI.

3.4.6 Thread. Cotton thread for seaming and stitching the shoulder pads and sleeve-heads shall be Tex 30 (ticket 70) meeting the requirements of Type I of A-A-52094.

3.5 Construction. End-item component layers shall be shingled appropriately to produce a finished item that shall have a concave shape meeting all applicable physical, dimensional and performance requirements of this specification. Shoulder pads and sleeve-heads shall be constructed using stitching for all pads and sleeve-heads using woven fabric. If needlepunch top and bottom materials are used, either stitching or a needlepunch method shall be used. End-items shall maintain their shape and integrity after dry cleaning (see 4.6.3) regardless of construction method. Seam allowances shall be 1/2 (±1/8) inch.

3.5.1 Stitching. Stitching, seams and stitch types shall be appropriate to the item being produced. Recommended stitches are provided in parentheses in 3.5.1.1, but manufacturers are permitted to use other appropriate stitches, as long as the end-item maintains integrity during handling and after dry cleaning.

3.5.1.1 Seam and stitch types. It is recommended that two (2) stitches per inch be used for basting stitches (seam type SSa, stitch type 301 or 401) and one to two (1 – 2) stitches per inch be used for zigzag stitches (seam type SSv, stitch type 304). As an option, manufacturers may use four to six (4-6) lines of straight stitching, one to two (1 – 2) stitches per inch, spaced at least 3/4 inch apart, across length (see Figure 1) of the pad instead of zigzag stitches. Overedge stitching may be used at the curved edge.

3.5.1.2 Ends of stitching. Ends of all stitches shall be backstitched or overstitched not less than 1/4-inch except where ends are turned under or caught in other seams or stitches. Ends of a continuous line of stitching shall overlap not less than 1/2-inch.

3.5.1.2.1 Repairs of stitching. Repairs of stitching shall be as follows:

a. When thread breaks, skipped stitches, run-offs, or bobbin runouts occur during sewing, the stitching shall be repaired by restarting the stitching a minimum of 1/2-inch back of the end of the stitching. When making these repairs, the ends of the stitches are not required to be backstitched.

b. Thread breaks or two or more consecutive skipped or run-off stitches noted during inspection of the item shall be repaired by overstitching. The stitching shall start a minimum of 1/2-inch from the end of the defective areas, continue over the defective area and continue a minimum of 1/2-inch beyond the defective area onto the existing stitching.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

c. Loose or excessively tight stitching shall be repaired by removing the defective stitching without damaging the materials and re-stitching in the required manner.

3.5.1.2.2 Thread ends. All thread ends shall be trimmed to 1/4-inch maximum length.

3.5.1.2.3 Thread breaks and ends of seams. The ends of all seams and stitching, when not caught in other seams and stitches, shall be backtacked not less than 1/2-inch. The ends of a continuous line of stitching (except on labels) shall be overlapped not less than 1/2-inch. Thread breaks (all stitch types) shall be secured by stitching back of the break not less than 1/2-inch.

3.5.2 Needlepunch construction. When needlepunch materials are used for the top and bottom layers of the end item, the pads may be assembled using a needlepunch process with at least 3 needles per inch to bind the layers together.

3.5.3 Finished pads. Finished pads shall be cut across their length (see Figure 1) at the center (±1/8 inch). Manufacturers may leave 1/4 – 1/2 inch of material uncut to retain the pads as a matched pair. A notch, if required, shall be cut in the top layer of Type I, Class 1; Type II; and Type III, Classes 2 and 3 shoulder pads, centered on the length.

3.6 Finished dimensions. Unless otherwise specified in the contract, the finished shoulder pads and sleeve-heads shall conform to the measurements specified in Table II. Measurement location guidance is provided in Figure 1 for shoulder pads and in Figure 2 for sleeve-heads. The finished pads shall not be significantly altered in thickness, shape or dimension after commercial dry cleaning three (3) times.

3.6.1 Sleeve-head length and weight. Unless otherwise specified in the contract, sleeve-heads may be put up in rolls with no more than two (2) pieces and a total length (per roll) of no more than 50 yards. If put up in rolls, the length requirement in Table II is not applicable, and sleeve-head weight shall be measured using appropriate length samples (see 4.6.3.2).

THIS SECTION INTENTIONALLY LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

TABLE II. Dimensions and weight of finished shoulder pads and sleeve-heads.

		Width (inches) 1/	Length (inches) 2/	Curved edge (inches) 3/	Thickness at vertical center (inches) 4/	Thickness at curved edge (inches) 5/	Weight range (ounces, per pair)
Type I	Class 1	4-3/4 (± 1/4)	10 (± 1/4)	14-1/2 (± 1)	1/2 (± 1/8)	1/4 (± 1/8)	≤ 1.00
	Class 2	4-1/2 (± 1/4)	9-1/2 (± 1/4)	14-1/2 (± 1/4)	1/2 (± 1/8)	1/4 (± 1/8)	≤ 1.00
	Class 3	4-3/4 (± 1/4)	10-3/4 (± 1/4)	17 (± 1/4)	1-3/8 (± 1/8)	1/4 (± 1/8)	≤ 1.00
	Class 4	4-3/4 (± 1/4)	10-3/4 (± 1/4)	17 (± 1/4)	7/8 (± 1/8)	1/4 (± 1/8)	≤ 1.20
Type II		4-1/2 (± 1/4)	8 (± 1/4)	13 (± 1/4)	1-1/2 (± 1/4)	1/4 (± 1/8)	≤ 1.20
Type III	Class 1	4-1/2 (± 1/8)	8 (± 1/8)	13 (± 1/8)	1/4 – 3/8	3/16 (± 1/16)	≤ 1.00
	Class 2	4-3/4 (± 1/4)	9-1/2 (± 1/4)	14 (± 1/4)	1/4 – 3/8	3/16 (± 1/16)	≤ 1.00
	Class 3	4-1/2 (± 1/8)	8 (± 1/8)	13 (± 1/8)	1/4 – 3/8	3/16 (± 1/16)	≤ 1.00
	Class 4	2-5/8 (± 1/8)	8-1/4 (± 1/8)	12 (± 1/8)	1/4 – 3/8	3/16 (± 1/16)	≤ 1.00
Type IV	Class 1 and Class 2	1-7/8 (± 1/8)	13 (± 1/4) Small 6/ 15 (± 1/4) Large 6/	N/A	1/8 – 1/4	N/A	≤ 0.70 7/ ≤ 0.75 7/

1/ For shoulder pads: Measurement taken from the open (unbound) edge of the shoulder pad to the peak of the curve.
For sleeve heads: Measurement taken across the sleeve head perpendicular to the folded edge (dimension shall not vary by more than 1/8 inch between any two points along the length of a sleeve head).

2/ For shoulder pads: Measurement taken from endpoint to endpoint directly across the open (unbound) edge of the shoulder pad.
For sleeve heads: Measurement taken from end to end, perpendicular to the sewn edge.

3/ Measurement taken from endpoint to endpoint along the bound edge of the shoulder pad.

4/ Measurement taken at the thickest part of the shoulder pad on the unbound edge.

5/ Measurement taken at the bound edge, at the peak of the curve

6/ If sleeve-heads are put up in rolls, this requirement is not applicable.

7/ If sleeve-heads are put up in rolls, samples shall be cut to the appropriate lengths (see measurement B) for this measurement.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

3.8 Cleaning. All loose threads shall be trimmed to (<1/4) inch or removed. All spots, stains and marking tickets shall be removed.

3.9 Workmanship. The finished pads and sleeve-heads shall conform to the quality of product established by this specification. The pads shall be free from all defects (see Table III) which would affect serviceability, appearance and uniformity.

4. VERIFICATION

4.1 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.2)
b. Conformance inspection (see 4.3)

4.1.1 Inspection conditions. Unless otherwise specified in the contract or purchase order (see 6.2), the contractor is responsible for ensuring that all inspection requirements as specified herein are met. Unless otherwise excluded, amended, modified or qualified in this specification or applicable procurement documents, all inspections shall be performed in accordance with all the requirements of referenced documents.

4.2 First article inspection. A first article shall be submitted to the examinations of 4.4 and 4.5, and the tests of 4.6, as applicable. The presence of excessive defects (see Table III), as defined in the contract (see 6.2), or failure to pass any test shall be cause for rejection of the first article. The sample size will be specified in the procurement document (see 6.2). The sample unit shall be one (1) pair of shoulder pads or sleeve-heads and the lot size shall be expressed in pairs of shoulder pads or sleeve-heads.

NOTE: Alternatively, sleeve-heads may be put up in rolls, in which case the sample unit shall be equivalent lengths for large sleeve-heads (30 inches per pair), and the lot size shall be expressed in pairs of large sleeve-heads.

4.3 Conformance inspection. Conformance inspection shall include the examinations of 4.4 and 4.5, and the tests of 4.6, as applicable. Except where otherwise indicated (see 6.2), sampling for inspection shall be performed in accordance with ASQ/ANSI Z1.4 (see 2.3) and with acceptance quality limits (AQL) as specified in the contract and/or order. Conformance inspection shall include appearance of finished items, finished measurements in Table II and examination for defects in Table III. The sample unit shall be one (1) pair of shoulder pads or sleeve-heads and the lot size shall be expressed in pairs of shoulder pads or sleeve-heads (see NOTE in 4.2).

4.4 End item visual examination. The shoulder pads or sleeve-heads shall be visually examined for the defects listed in Table III. All fabric and end-item defects which are clearly noticeable at normal viewing (3 feet) and affect serviceability and appearance of the finished pads shall be scored. Material defects are defined in ASTM D3990. If needed, closer inspection will be performed to verify compliance to specification requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

TABLE III. End item visual defects.

Examine	Defect Description	Major	Minor
Fabric	Hole deep cut, tear, mend or burn greater than 1/2 inch	101	
	Any fabric not as specified for the type or class produced	102	
Components	Any component part not as specified, affecting the function or appearance of the end-item	103	
Cleanliness	Any grease, oil or other substance that transfers to a clean cloth when rubbed	104	
	Loose threads not trimmed to less than 1/4 inch	105	
	Marking tickets not removed	106	
Stitches and seams	Fabric pleated in stitching	107	
	Tight tension (stitches break when strain is applied in the direction of the seam)	108	
	Loose tension, resulting in poorly formed seam.	109	
	Any seam open more than 2 inches	110	
Construction 1/	Ends of zigzag or straight stitching not tacked (Types I, II and III)	111	
	Rows of zigzag or straight stitching spaced less than 3/4 or more than 1-1/4 inches apart (Types I, II and III)	112	
	Pad not cut in half to produce the required shape (Types I, II and III)	113	
	Notch on upper side of pad omitted (Type I, Class 1; Type II; and Type III, classes 2 and 3)		201
	Pad not cut/assembled to form concave effect (Types I, II and III)		202
	Component layers not shingled appropriately to form specified shape or fullness (Types I and III)	114	
	Interfacing (if used) not cut as specified (Types I and III)	115	
	Pad width differs by more than 1/4 inch between the pads in the set	116	
Basting stitch	Straight basting stitch around curved edge of pad omitted (Types I, II and III)	117	
	Distance from edge not as specified	118	

1/ Straight stitching may be used in place of zigzag stitching (see 3.5.1.1).

4.5 Methods of inspection.

4.5.1 End item dimensional and weight examination. The pads and sleeve-heads shall be examined for conformance to the dimensions and weight specified in Table II. Any dimension or weight not within the specified tolerance shall be cause for rejection of the lot. The sample unit shall be one (1) pair of shoulder pads or sleeve-heads and the lot size shall be expressed in pairs of shoulder pads or sleeve-heads (see 4.2). The inspection level shall be as specified in the contract or purchase order (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

4.6 Material testing.

4.6.1 Component material testing. The component material shall be tested for the characteristics listed in Table VI. The methods of testing as specified wherever applicable and as listed in Table VI shall be followed. All test reports shall contain the individual values utilized in expressing the final results. The sample unit shall be in accordance with Table IV for all physical and chemical tests. The lot shall be unacceptable if one or more sample units or the lot average fail to meet any requirement specified. The sample size shall be in accordance with the Table V.

TABLE IV. Sample unit.

Component material	Sample unit for testing
Felt Wadding Needlepunch	1/2 yard, full width 1/2 yard, full width 1/2 yard, full width
Batting Matted noils interfacing Buckram interfacing	1/4 ounce 1/4 yard, full width 1/4 yard, full width

TABLE V. Sampling.

Lot size (yards)	Sample size (sample units)
800 or less	2
801 to 22,000	3
22,001 and over	5

THIS SECTION INTENTIONALLY LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

TABLE VI. Component test methods.

Component	Characteristic	Requirement Paragraph	Test Method
Cloth	Fiber identification 1/ Yarns per inch Weight, ounces per square yard	3.4.1.1.1 and 3.4.1.1.2	AATCC 20 ASTM D3775 ASTM D3776/D3776M
Needlepunch	Fiber identification 1/ Weight, ounces per square yard Stiffness: Machine direction Cross-machine direction Breaking strength: Machine direction Cross-machine direction Thickness	3.4.1.2	AATCC 20 ASTM D3776/D3776M ASTM D1388 ASTM D5034 ASTM D1777
Felt	Fiber identification and wool content 1/ Weight, ounces per square yard Thickness	3.4.2 and Table I	AATCC 20A ASTM D3776/D3776 ASTM D1777
Batting	Fiber identification and wool content (Type III, Class 1) 1/ Weight, ounces per square yard (Type II) Staple length (Type II)	3.4.3	AATCC 20A ASTM D3776/D3776 ASTM D1440
Interfacing, matted noils	Fiber identification and wool content 1/	3.4.4.3	AATCC 20A
Wadding	Fiber identification and wool content 1/ Weight, ounces per square yard Top and bottom surfaces glazed	3.4.5	AATCC 20A ASTM D3776/D3776 Visual

1/ See 6.6.

4.6.3 End-item testing.

4.6.3.1 Thickness.

4.6.3.1.1 Thickness at vertical center. Thickness of Type I, II and III pads shall be measured half of the distance of the cut edge of the pad with a platform micrometer having a 1 to 1-1/8 inch diameter presser foot and using a pressure of 0.1 pound per square inch. The foot shall be positioned so that the edge of the foot is within 1/16 inch of the edge, and the remainder of the foot is flat on the pad. The reading for the thickness shall be taken after an interval of 1 minute under load.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

4.6.3.1.2 Thickness at curved edge. Thickness of Type I, II and III pads and Type IV sleeve-heads shall be measured half of the distance of the curved edge of the pad with a platform micrometer having a 1 to 1-1/8 inch diameter presser foot and using a pressure of 0.1 pound per square inch. The foot shall be positioned so that the edge of the foot is within 1/16 inch of the edge, and the remainder of the foot is flat on the pad. The reading for the thickness shall be taken after an interval of 1 minute under load.

4.6.3.2 End-item weight. End items shall be weighed using a calibrated scale or balance. Shoulder pads and sleeve-heads shall be weighed in sets of no fewer than 12 pieces (6 pairs) and the results averaged to determine the weight per pair. If sleeve-heads are put up in rolls, lengths equivalent to the desired number of pairs shall be weighed. Results shall be compared to the requirements stated in Table II.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When packaging of materiel is to be performed by DoD or in-house contractor personnel, these personnel need to contact the responsible packaging activity to ascertain packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activities within the Military Service or Defense Agency, or within the military service's system commands. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The pads and sleeve-heads are intended to provide fullness in the shoulder and upper sleeve of selected jackets and coats worn by the US Armed Forces.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number and date of this document.
b. Types and classes required (see 1.2).
c. The specific issue of individual documents referenced (see 2.2 and 2.3).
d. When first article sample is required (see 3.1, 4.2, and 6.3).
e. Number of first article samples (see 4.2).
f. Conformance inspection acceptance quality limits (AQL) (see 4.3, 4.5 and 4.6).
g. Inspection conditions (see 4.1.1)
h. Packaging (see 5.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

6.3 First article. When a first article is required (see 3.1), it should consist of pre-production samples representative of the quality of production samples. The contracting officer should specify the appropriate type, size and quantity of first article units to be furnished. The contracting officer should include specific instructions in all acquisitions documents regarding arrangements for selection, inspection and approval of the first article.


6.4 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

6.5 Certificate of compliance. The contracting activity may select to accept a certificate of compliance for stated requirement. The government reserves the right to conduct testing to verify the requirement.

6.6 Subject term (key word) listing.

Batting
Buckram
Felt
Needlepunch
Noils
Wadding

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

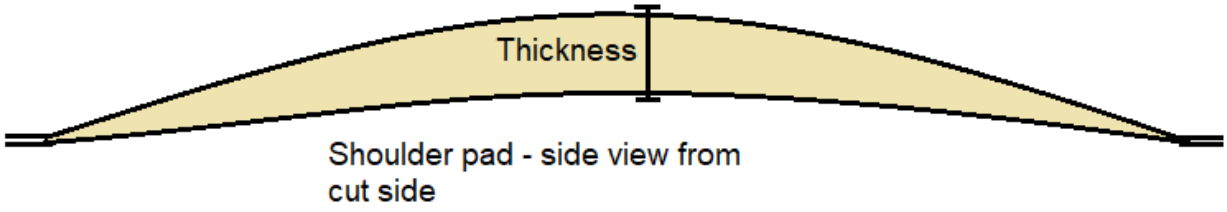

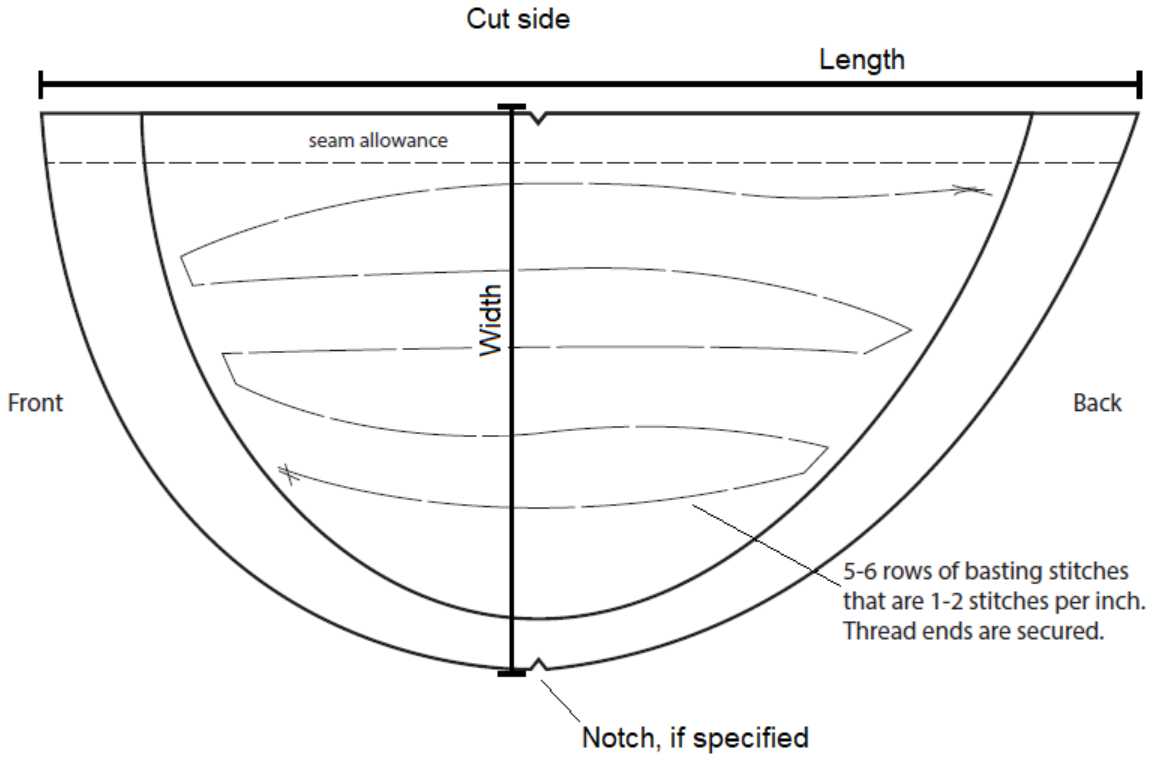


FIGURE 1. Shoulder pad measurement guidance. (See Table II)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

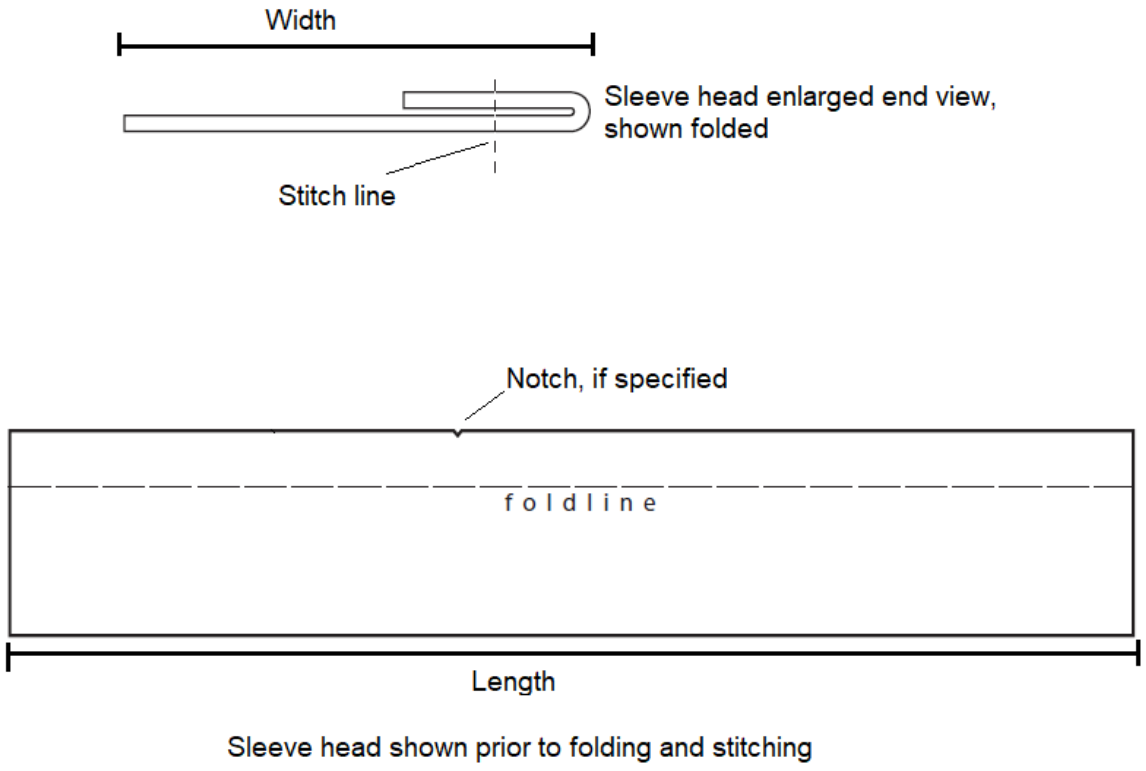


FIGURE 2. Sleeve-head measurement guidance. (See Table II)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.

Custodian:
Army – GL
Navy – NU
Air Force - 11

Preparing activity:
DLA - CT

Review activities:
Navy – CG1, MC

(Project: 8315-2019-009)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, verify the currency of the information above using ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:27Z
Check the source to verify that this is the current version before use.