MIL-F-15077E
30 September 1982
SUPERSEDING
MIL-F-15077D
27 May 1975

MILITARY SPECIFICATION
FURNITURE, METAL, DORMITORY

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1 SCOPE

1.1 Scope. This specification covers metal dormitory furniture.

1.2 Classification. The metal furniture shall be of the following types and sizes, as specified (see 6.1):

Type Ia	-	Beds, panel
Size A	-	Twin size
Size B	-	Full size
Type Ib	-	Beds, dormitory
Size A	-	Single
Size B	-	Twin size
Type Ic	-	Headboard, twin size
Type Id	-	Beds, bunk (Convertible type), single and double deck, size single, semi-panel style
Type IIa	-	Chest, small
Type IIb	-	Chest, large
Type IIIa	-	Dresser, small
Type IIIb	-	Dresser large
Type IVa	-	Table, vanity, left or right kneehole
Type IVb	-	Desk, center kneehole
Type IVc	-	Desk, left or right kneehole
Type V	-	Desk, flat top
Type VIa	-	Table, night, with drawer
Type VIb	-	Table, night, with compartment
Type VII	-	Mirrors
Size A	-	30-inches by 26-inches
Size B	-	34-inches by 30-inches

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Naval Facilities Engineering Command, Code 0432, 200 Stovall Street, Alexandria, VA 22332 by using the self-addressed Standardization Document Improvement Proposal (DOD Form 1426) appearing at the end of this document or by letter.

FSC 7105

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:29Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. Unless otherwise specified, the following specifications and standards of the issue listed in that issue of the Department of Defense Index of Specification and Standards (DoDISS) specified in the solicitation form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

DD-G-451 - Glass, Plate, Sheet, Figured.
TT-C-490 - Cleaning Methods and Pretreatment of Ferrous Surfaces for Organic Coatings.
TT-E-491 - Enamel; Gloss, Synthetic (For Metal and Wood Hospital Furniture).
TT-P-659 - Primer-Surfacer: Synthetic, Tints and White (For Metal Wood Surfaces).
PPP-B-591 - Boxes, Fiberboard, Wood-Cleated.
PPP-B-601 - Boxes, Wood, Cleated-Plywood.
PPP-B-621 - Boxes, Wood, Nailed and Lock-Corner.
PPP-B-636 - Boxes, Shipping, Fiberboard.
PPP-B-640 - Boxes, Fiberboard, Corrugated, Triple-Wall.

MILITARY

MIL-L-10547 - Liners, Case, and Sheet, Overwrap: Water-Vaporproof or Waterproof, Flexible.
MIL-W-12332 - Welding, Resistance, Spot, Seam, and Projection, for Fabrication Assemblies of Low-Carbon Steel.

STANDARDS

FEDERAL

FED-STD-H28 - Screw-thread standards for Federal Service.

MILITARY

MIL-STD-105 - Sampling Procedure and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.
MIL-STD-130 - Identification Marking of U.S. Military Property.
MIL-STD-1186 - cushioning, Anchoring, Bracing, Blocking and Waterproofing; with Appropriate Test Methods.

2.1.2 Other Government documents and publications. The following other Government documents and publications form a part of this specification to the extent specified herein.

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:29Z
Check the source to verify that this is the current version before use.

UNITED STATES DEPARTMENT OF COMMERCE

R2-62 - Simplified Practice Recommendation; Bedding Products and Components.

(Copies of specifications, standards, and publications required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. The issues of the documents which are indicated as DOD adopted shall be the issue listed in the current DODISS and the supplement thereto, if applicable.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM A36	- Structural Steel
ASTM A 366	- Steel, Carbon, Cold-Rolled Sheet, Commercial Quality
ASTM A513	- Electrical-Resistance Welded Carbon and Allow Steel Mechanical Tubing

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION

LD 3-1980 - High-Pressure Decorative Laminates.

(Application for copies should be addressed to the National Electrical Manufacturers Association, 2101 L Street N.W., Washington, DC 20037.)

Industry association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.

3. REQUIREMENTS

3.1 Description. The metal dormitory furniture covered by this specification shall consist of beds, chests, dressers, vanity tables, desks, night tables, and mirrors. Except for mirrors, construction of items shal be sheet steel panels with inner frames and rectangular legs or posts. Case goods tops shall be removable. Top surface shall be painted or covered with a one-piece laminated plastic sheet, as specified. All case goods and beds shall be furnished with glides, except that beds may be furnished with casters. Overall dimensions shall be as shown on applicable figures 1 through 12.

3.2 First article. Unless otherwise specified (see 6.1), the contractor shall furnish one of each item on contract or order for first article inspection and approval. The first article inspection shall be performed at the manufacturer's plant.

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:29Z
Check the source to verify that this is the current version before use.

3.3 Interchangeability. All parts shall be manufactured to standards that will permit replacement or adjustment without modification of parts.

3.4 Bed dimensions. Beds shall be built to conform to conventional standards of Department of Commerce Simplified Practice Recommendation R2-62 for the sizes specified.

3.5 Materials. Material used shall be free from defects which would adversely affect the performance or maintainability of individual components or of the overall assembly. Material not specified herein shall be of the same quality used for the intended purpose in commercial practice. Unless otherwise specified herein, all equipment, material, and articles incorporated in the work covered by this specification are to be new, however, recovered raw materials shall be used to the maximum extent possible without jeopardizing the intended use. The term "recovered material" means materials reprocessed to become a source of raw materials, as opposed to virgin raw materials which include previously unused metal or metal ore, any undeveloped resource, or new technology which will become a source of raw material. None of the above shall be interpreted to mean that the use of used or rebuilt products are allowed, unless otherwise specified.

3.5.1 Steel.

3.5.1.1 Steel sheets. Components fabricated from sheets shall conform to ASTM A366.

3.5.1.2 Steel tubing. All steel tubing shall be cold-rolled steel equipped with electrically butt-welded joints conforming to ASTM A513.

3.5.1.3 Steel angles. Steel angles shall be in accordance with ASTM A36. Edges shall slightly rounded to avoid sharpness.

3.5.2 Springs. Gages referred to herein are the United States Steel Wire Gage.

3.5.2.1 Helical springs. Helical springs shall be formed of 12-gage high carbon spring wire having a tensile strength range of 205,000 to 235,000 p.s.i. Helicals shall have the number of turns necessary for the intended use, and shall be approximately 3/4-inch in diameter. Springs shall be finished with one coat of baked-on black enamel.

3.5.2.2 Sinuous springs. Sinuous springs shall be formed from 9-gage high carbon furniture spring wire having a tensile strength range of 220,000 to 250,000 p.s.i. Each strand shall be one piece, terminating with Z-hook ends. Springs shall be provided with a protective coating from the supplier and finished with one coat of baked-on black enamel.

3.5.3 Sound-deadening material. Sound-deadening material shall be composed of mineral base materials, organic base materials, or asphalt impregnated minerals which adhere tenaciously to the metal for an indefinite period of time. The material shall be resistant to climatic heat, moisture, and insects, and must not chip, flake, or soften at temperatures up to 120°F. The sound-deadening material shall not emit any objectionable odor.

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:29Z
Check the source to verify that this is the current version before use.

3.5.4 Laminated plastic. Laminated plastic sheets for tops shall be in accordance with NEMA LD 3, Grade GP 50. Color, pattern, and finish shall be as specified (see 6.1).

3.6 Accessories.

3.6.1 Glides. Glides shall be round body, die-formed steel, chromium or nickel-plated, rubber cushion type. The base of glide shall be not less 0.030-inch thick case hardened steel. The diameter of the glide shall be not less than the width of the square bearing plate of the adapter (see 3.6.3), except 1-1/16-inch diameter glides may be used for 1-1/8-inch square tubing. All furniture items shall be furnished with glides, except when casters are specified for beds.

3.6.2 Casters. When required (see 6.1), casters shall furnished for beds in lieu of glides and shall have a 2-inch diameter wheel of hard rubber fiber composition or of a phenolic resin compound, having a minimum tread of 3/4-inch. The fork shall be of one piece of steel suitably embossed, ribbed, or formed to ensure ample strength. The stem shall be fastened in the swivel head of caster to permit independent rotation. The swivel bearing shall be of the antifriction type, so designed that in swiveling under load, all forces will be transmitted through the balls. For stem and adapter, see 3.6.3.

3.6.3 Adapters. The adapters for securing glides for use with 1-1/4-inch and 1-1/2-inch square tubing shall be of steel spring construction with leg washer or leg mount. For 1-1/8-inch square tubing, the adapter shall be a spring steel member having substantially an umbrella shape, with leg washer or leg mount. Umbrella type adapters shall not be used for tubing larger than 1-1/8-inch square.

3.6.4 Drawer locks. Drawer locks for case goods, when specified (see 6.1), shall be a regular drawer type cylinder lock and key. The lock shall be installed with the face of cylinder not more than 1/4-inch beyond the exterior surface of drawer front.

3.6.5 Knob pulls. Knob pulls shall be wrought metal, not less than 2-inches in diameter, and project 3/4- to 1-inch from the drawer front. Unless otherwise specified (see 6.1), pull finish shall be satin brass.

3.6.6 Mirror standards. Mirror standards, when specified (see 6.1), shall be used to attach mirrors to furniture cases. The standard shall be an approved commercial type having one or more upright members of either one-inch diameter steel tubing with wall thickness of not less than 20-gage, or flat steel not less than one inch wide by 1/4-inch thick. All necessary parts for attachment of both mirror to standard and standard to case shall be included. Standard shall provide vertical adjustment of mirror height, and forward and back tilting adjustment. All methods of securing the various components shall result in a strong rigid assembly.

3.6.7 Mirrors. Mirror glass shall be 7/32-inch thick and shall conform to DD-G-451, type 1, class 1, mirror glazing quality. All four corners shall be rounded to a one inch radius and all edges shall be clean cut and polished. Mirrors shall be mounted on a backing of 3/16-inch hardboard, and shall be secured thereto by cushioned clips. Suitable means for securing cords for hanging shall be provided on backs.

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:29Z
Check the source to verify that this is the current version before use.

3.7 Construction.

3.7.1 General construction. The main assembly of each furniture item listed in 1.2 shall be constructed of steel. Each part shall be die-formed to provide strength and insure uniformity. Main assemblies shall be secured, reinforced, and braced throughout; the component parts being permanently joined, by the most applicable methods of welding. No bolts, screws, or rivets shall be used unless indicated herein. All components shall be placed in jigs and rigidly held during welding assembly. All items shall be built on legs. Overall dimensions for each item shall be as shown on applicable figures 1 through 12. Materials and accessories shall be specified in 3.5 and 3.6. Finish shall be specified in 3.8.

3.7.1.1 Welding. Spot welds shall not be closer to the edge of either adjoining member than one-half of the greatest dimension of the spot weld, nor shall they be centered closer together than twice the greatest dimension. Squeeze time, weld time, and hold time shall be controlled to produce uniform welds. Exposed spot welds shall be filled and ground smooth when exposed surface is visibly distorted or dimpled. Projection welds shall be ground flush with matching surfaces.

3.7.1.2 Sound deadening material application. The material shall be applied to unexposed side of the sheet steel components. A minimum of 50 percent of the area of the underside of all tops, except night tables shall be treated with the sound-dead material. Night tables shall have a minimum of 25 percent of the top area so treated. A minimum of 45 percent of the area of sides of chests, and a minimum of 25 percent of the area of dresser sides shall be treated. Double-panel desk sides extending more than 6-1/2-inches below top shall have a minimum of 20 percent treated. Sides of night tables extending not more than 6-1/2-inches below top shall not require sound deadening. All sound-deadening material shall be applied to provide the maximum elimination of sound of metallic vibration.

3.7.2 Detailed construction. The top all items shall be of 20-gage sheet steel with top surface painted or covered with a decorative laminated plastic sheet as specified. Front corners of dresser, chest, and night table tops shall have corners rounded to a minimum radius of 1/2-inch. All four corners of table desk and vanity desk tops shall be rounded to a minimum radius of 1/2-inch. Tops shall extend 5/16-inch at front and at each side on all items. In addition, the vanity and table desk tops shall extend 5/16-inch at the rear. The top and top edging shall be neatly formed into a single unit that shall be assembled to the body by interlocking the front of the top with the front of the case or sub-top and securing the back with sheet metal screws and suitable lockwashers. When specified (see 6.1), laminated plastic sheet shall be bonded to the top in accordance with 3.8.4. The main frame of the cases shall consist of a rigid structural framework of vertical and horizontal steel channels and shapes, completely assembled by appropriate methods of welding so as to be free from weave or distortion. All members of this frame work shall be of minimum 18-gage steel. The uppermost part shall include channels from front to rear, to stiffen and support the removable tops, two channels being required for desks and chests, and three channels for dressers and vanities, where width of top exceeds 38-inches. It shall also include a horizontal channel member between front posts at bottom, designed to receive the forward end of the case bottom and also the finished piece which completes

Source: https://assist.dla.mil - Downloaded: 2026-10-18T05:29Z
Check the source to verify that this is the current version before use.

the front of the case. Channel members shall be of 20-gage steel and shall be mechanically alined in rigid jigs for accurate welding. The items shown in figures 8 through 12 shall be constructed with one-piece leg posts extending from the floor to the under side of the top. Side panels shall be securely welded to the posts. Side panels of rigid frame cases shall be minimum 20-gage steel with vertical corners rounded to approximately 3/8-inch radius to match tops and legs. Panels shall be formed with returned flanges so as to intermember with vertical posts and create hidden joints at front. Case and drawer runners of rigid frame cases shall be of minimum 16-gage steel. Case runner shall be formed into a T-section with vertical flanges spot welded to front and rear vertical frame members. Drawer runners shall be die-formed to channel shape, with a flange at right angles for welding to drawer side. An embossed rib shall run the full length of runner to act as sliding surface and minimize friction. Drawer runner shall form a pocket with drawer front for securely attaching a rubber bumper to permit closing drawer quietly and flush with case. Stiffening provision shall be used to secure the mirror standard to the case rigidly so as to prevent any possible distortion of the case.

3.7.2.1 Drawers. Drawers shall be of box-type construction having plain-face front of 20-gage steel joined to sides, back, and bottom of 24-gage steel, by electric spot welding. The top edge of drawer, sides, and back shall be flanged at right angles and then returned under the flange to produce a smooth edge on the inside drawer top perimeter. Side top flanges shall be approximately 3/4-inch and front and back top flanges shall be approximately 1 inch. The hem (return bend flattened) shall be 1/4-inch all top flanges. Sides and back to have bottom flanges approximately 5/8-inch. End flanges of front and back panels to be approximately 3/8-inch. Drawers sides to be offset to provide flush surface when drawer guide is spot welded in place. Drawer front panel shall be formed with lower lip to conceal female drawer runner and with reverse flange for support and spot weld assembly of bottom. The drawer bottom shall be a plain steel sheet supported by spot welding to the bottom flanges of sides, back and front panels. Front of drawer panel shall be punched for installing drawer pull. To maintain rigidity and squareness of drawer assembly top flanges of sides back and front shall be spot welded all four corners. Center dividers shall consist of single sheet of 24-gage steel formed in a continuous U shape with open ends flanged outward. Partition shall extend the full depth of drawer, with flanges electrically spot welded to the drawer bottom. All drawers shall provided with a stopping arrangement designed to prevent drawers from being accidentally removed while in use, but may be released for intentional removal. Drawer body shall extend to within 1-1/2-inch of the rear of the case. The design and construction shall be such as to insure smooth, true, and even operation without binding. Ends of drawer runnres shall fitted with suitable rubber bumpers. Top drawers of chests and dressers shall be fitted with center dividing partitions previously described.

3.7.2.2 Locking mechanism. Locking mechanism, when specified (see 6.1), shall lock all drawers in a furniture unit. The top center drawer shall have a lock conforming to 3.6.4, and this drawer shall control a concealed locking mechanism for all the drawers in the unit. If one drawer is left ajar and the top drawer is locked, the open drawer shall lock when pushed closed. This shall be done without opening the top drawer. Locking mechanism shall work smoothly and accurately without failure.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:29Z
Check the source to verify that this is the current version before use.

3.7.3 Item construction details.

3.7.3.1 Type Ia beds. Twin and full-size beds shall have minimum dimensions and design similar to the item shown in figure 1. The beds shall be of full panel construction, with top corners of head and footboards having a minimum radius of 3/4-inch. The framework shall consist of two vertical posts and a horizontal top rail of 1-1/2-inch square tubing of 18-gage wall thickness. When assembled, the posts shall support the top rail, the abutted joints thus formed shall be welded, and the top corners trimmed to conform to panel radius at these points. At the bottom of head and footboard panels, a 7/8-inch minimum square tube rail shall extend between posts to form a 16-inch panel for both headboard, and footboard. The panels shall be made from single sheets of 20-gage steel. The panels shall be formed at sides and top with suitable flanges to cover posts and rails at these points.

3.7.3.1.1 Bedsprings. Bedsprings shall be of the sinuous type with full angle frame. The riser corners shall be steel box or malleable iron construction with double button engagement in end-corner locks. The fabric shall be attached to end angles by close wound helicals.

3.7.3.2 Type Ib bed. Size 1, single and twin size dormitory beds shall have minimum dimensions and design similar to item shown on figure 2. The framework of this bed shall consist of two vertical posts and a horizontal top rail of 1-1/2-inch square tubing. The head and footboard shall be similar and shall have a 6-inch minimum intermediate panel member, the top of which shall line up with the top of the bedspring. All construction and spring data shall be similar to type Ia beds listed above.

3.7.3.3 Type Ic headboard. The headboard shall have dimensions and design similar to the twin bed headboard of the type Ia bed. The headboard shall be full-panel type, with construction and material similar to the type Ia bed, except it shall be a single headboard only without glides, and provided with two holes in each post properly spaced for attaching headboard to bed dolly so that headboard post clear the floor by approximately 1/2-inch. Each headboard shall be furnished with a dolly (see 3.7.3.3.1).

3.7.3.3.1 Bed dolly. The bed dolly shall be adjustable in width to accomodate conventional standard full-size and twin-size bedding in accordance with SPR R2-62. The dolly shall be of the open-end design to accomodate both conventional standard length bedding and oversize length, including 84-inches. The dolly frame shall consist of sides and end rails of minimum 1-1/2- by 1-1/2- by 1/8-inch high-carbon steel angles. The four legs or risers shall be equipped with minimum 2-inch diameter steel glides with nylon floor contact surfaces. Glide stems shall be minmum 7/16-inch diameter. Side rails shall be minimum of 71-inches long and the foot end of the vertical angle of side rails shall be rounded. The height from the floor up to the top surface of the side angle, where the box spring rests, shall be from 7-1/4-inches to 7-9/16-inches. The head end of the dolly shall have plates or brackets for attaching headboards; all nuts, bolts, and lockwashers shall be furnished. All legs shall be inset toward the center. The frame shall be adequately braced to provide a firm and rigid support. Construction throughout shall be by rivets, except that the headboard plate or bracket may be welded. Metal frame parts shall be the manufacturer's commercial standard color. Finish shall be a minimum of one coat of high grade enamel, applied by dipping and baked-on. Sheet of printed assembly instructions shall be packed in each shipping container.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:29Z
Check the source to verify that this is the current version before use.

3.7.3.4 Type Id bed. Minimum dimensions and design shall be as shown on figure 12. Corner posts shall be 1-1/2-inch square steel tubing with 0.065-inch wall thickness. Cross stretcher between posts of each head and foot section shall be one-inch square steel tubing, with 0.035-inch wall thickness, welded or brazed around entire perimeter of joints at both ends. The stretcher tube ends shall be centered on the 1-1/2-inch post width. Head and foot panels shall be of 0.039-inch thick sheet steel flanged at sides and formed over minimum 7/8-inch square 0.0359 inch thick steel stiffeners at top and bottom. The stiffener section and panel formation shall produce a neatly closed square section at panel top and bottom. Panel and stiffeners shall be welded by the most applicable methods, and the entire reinforced panel unit securely welded to corner posts. Bed corner locks to receive bedsprings shall be double hook design, notched and shaped to provide a driving wedge fit with engagement buttons of bedsprings. These locks shall be of 5/32-inch thick steel angle with minimum 2- by 1-3/8-inch flanges, 5-1/4-inches high. The locks shall be securely riveted to corner posts through tube wall and a steel inner liner reinforcement or welded to the corner post. The reinforcement shall be at least 3/16-inch thick, 3/4-inch wide, and 5-inches high. The top of each posts shall be fitted with a snap-on heavy gage stamped steel cap. The cap shall be designed to hold securely in use, yet be removed without tools when double decking is required.

3.7.3.4.1 Adapters. When specified (see 6.1), adapters shall be furnished to permit double decking two beds. The adapters shall be furnished in sets of four. Each adapter shall consist of an outer section of the same tubing as corner posts, fitted with an inner sleeve at least 16-1/2-inches long. The inner sleeve shall have 0.059-inch wall thickness. Four inches of the inner sleeve shall extend beyond each end of the outer section without deformation. These parts shall be spot welded with not less than four spot welds on all four sides. The sleeve extensions shall fit tightly into corner posts to join two beds rigidly into a solid unit, and shall make a smooth, continuous appearance when joined.

3.7.3.4.2 Bedsprings. Each bed shall be furnished with a fully framed sinuous fabric spring. The frame shall consist of minimum 1-1/2- by 2-inch, 5/32-inch thick steel angle side and end rails. Two-inch flanges shall be vertical. Horizontal flanges of side rails shall overlay horizontal flanges of ends at corners and be assembled by riveting together or welding. Each corner shall be braced by a diagonal cross strap at least one inch wide and 1/8-inch thick gusset plate, riveted or welded to each angle. Two stretcher braces shall span the frame width, placed to furnish maximum support to the frame and fabric. Stretcher braces shall be located approximately one-third of frame length toward center from each end. The braces shall be of one-by one-inch, 0.1196-inch thick rerolled rail angle or one inch outside diameter steel tubing, with 0.065-inch wall thickness, formed and offset to clear spring depression under load and shall be riveted or welded to the side rails. Bedspring corner locks shall be of double button design to provide a driving wedge fit with bed locks. The lock plate shall be minimum 1/8-inch thick high carbon steel fitted with two oversize shouldered rivets or steel studs riveted thereto to engage with bed locks. The plates shall be securely riveted or welded to the sides rails. The fabric shall consist of 18 equally spaced transverse strands of sinuous fabric. Each strand shall be connected to adjacent strands with at least four wire connecting links, clinched over the springs. Strand ends shall be inserted in holes in horizontal flanges of side rails in a manner to

Source: https://assist.dla.mil - Downloaded: 2026-10-18T05:29Z
Check the source to verify that this is the current version before use.

provide secure retention free from scratching and tearing hazards. Each end strand shall be attached to the end angles with five helical springs.

3.7.3.5 Type IIa chest. Type IIa chest shall have dimensions and design similar to the item shown on figure 3. Height of legs to underside of case shall be not less than 5-1/2-inches and not more than 7-3/4-inches. The top drawer shall have center partition.

3.7.3.5.1 Type IIb chest. Type IIb chest shall have dimensions and design similar to the item shown on figure 4. Height of legs to underside of case shall be not less than 5-1/2-inches and not more than 7-3/4-inches. The top drawer shall have center partition.

3.7.3.6 Type IIIa dresser. The dresser shall have dimensions and design similar to item shown on figure 5. The top drawer shall have center partition.

3.7.3.6.1 Type IIIb dresser. The dresser shall have dimensions and design similar to item shown figure 6. The top drawer shall have center partition.

3.7.3.7 Type IVa table, vanity. The vanity table shall have dimensions and design similar to item shown on figure 7 except that right or left hand kneehole space shall be specified (see 6.1). This item shall have three drawers.

3.7.3.7.1 Type IVb desk, center kneehole. The desk shall have dimensions and design similar to item shown on figure 8. This item shall have three drawers and a bookshelf at each end.

3.7.3.7.2 Type IVc desk, left or right kneehole. Desk shall have dimensions and design similar to item shown on figure 9, except that right or left hand kneehole space shall be specified (see 6.1). This item shall have one long top drawer and a bookshelf at end section.

3.7.3.8 Type V desk, flat top. The desk shall have dimensions and design similar to item shown on figure 10. This item shall have one long drawer.

3.7.3.8.1 Kneehole height for all desk and vanity items shall be minimum of 24-inches from the floor.

3.7.3.9 Type VIa table, night. The night table shall have dimensions and design similar to item shown on figure 11, type VIa. This item shall have a top drawer and shelf below.

3.7.3.9.1 Type VIb table, night. The night table shall have dimensions and design similar to item shown on figure 11, type VIb. This item shall have a compartment in top in lieu of drawer and shall have shelf below.

3.7.3.10 Mirrors. Unless specified in the contract or order (see 6.1), mirrors shall have rounded corners. Mirrors shall conform to 3.6.7.

Source: https://assist.dla.mil - Downloaded: 2026-10-18T05:29Z
Check the source to verify that this is the current version before use.

3.8 Treatment and finish. All surfaces of items, except bed dolly and accessories, shall be painted. Application of primer and finish coat shall produce smooth and uniform surfaces without runs, wrinkles or areas of thin or no film, and free from objectionable defects.

3.8.1 Surface preparation. All surfaces to be painted shall be treated in accordance with Type I or II of TT-C-490.

3.8.2 Primer. All surfaces shall receive a primer coat in accordance with TT-P-659. Primer shall be neutral color compatible with shade of finish coat. The primer shall be baked-on in accordance with the time-temperature cycle recommended by the primer manufacturer.

3.8.3 Finish. All primed surfaces shall be finished with a minimum of one coat of enamel in accordance with class B of TT-E-491. Colors and types of finish (wood graining, solid color or combination of colors) shall be specified (see 6.1). The contractor shall submit 2 color samples of each color specified (see 6.3). Enamel shall be baked-on in accordance with the time-temperature cycle recommended by the enamel manufacturer. Special attention shall be given to the bottom and interiors to insure that all surfaces are adequately protected against corrosion.

3.8.4 Case item top. When specified (see 3.7.2 and 6.1), laminated plastic shall be bonded to the top surface in accordance with the recommendations of NEMA LD-3.

3.9 Workmanship. A high quality of workmanship shall be evident throughout and shall meet the standards prevalent among manufacturers who normally produce furniture of the type specified herein.

3.9.1 Steel fabrication. The units shall be stable; without torque, deflection, warp or twist. Bends, forming corners, shall be square and true free of kinks, uniform in size and shape. Exposed edges shall be straight and smooth, without protrusions. There shall be no sharp edges or corners exposed in the finished work which could be judged potentially harmful to wearing apparel or to the user.

3.9.2 Welding. Exposed welds on casegoods, as viewed from the exterior of the item, shall be extended to the full width of the joining edges and shall be ground smooth and flush, matching the adjacent surfaces. Unexposed welds do not require finish grinding, but shall have good uniform appearance. Parts shall be properly prepared to insure soundness and maximum strength, alined in correct position by jigs or fixtures. Jigs shall be designed to permit expansion and contraction of the metal during the welding process to minimized buckling and distortion. All welds shall be thoroughly fused and sound, and shall be free form cracks, fissures, pits, holes, gas pockets porosity, and undercutting. Spot welds shall be properly spaced, of sufficiently large diameter, and free from pits and flashes.

3.9.3 Riveted connections. Rivet holes shall be accurately punched or drilled and have all burrs removed. Rivets shall completely fill the holes and rivet heads on exposed surfaces shall be flush. Rivet heads shall be full, neatly made, concentric with rivet holes, and in full contact with the surface of the member.

Source: https://assist.dla.mil -- Downloaded: 202640-18T05:29Z
Check the source to verify that this is the current version before use.

3.10 Identification marking. Each item shall be marked for identification in accordance with MIL-STD-130. The markings shall be placed on the back of case items and the bottoms of table tops.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Inspection of materials and components. In accordance with 4.1, the contractor is responsible for insuring that materials and components used were manufactured, examined, and tested to the extent specified, in accordance with requirements of referenced subsidiary specifications and standards, if any.

4.2 Inspection lot. All items offered to the Government at one time, shall be considered a lot for purposes of inspection.

4.3 Classification of inspections. The inspection requirement specified herein are classified as follows:

(a) First article inspection.
(b) Quality conformance inspection.

4.3.1 First article inspection. First article inspection shall be performed on one unit of each furniture item when first artilce samples are required (see 3.2). This inspection shall include the examination of 4.5 and tests of 4.6.

4.3.2 Quality conformance inspection. Quality conformance inspection shall include the examination of 4.5 the tests of 4.6.

4.4 Sampling.

4.4.1 Sampling for examination. A random sample of items shall selected from each lot in accordance with MIL-STD-105 at inspection level II. In terms of defects per 100 units, the acceptable quality levels shall be 2.5 for major defects and 4.0 for minor defects.

4.4.2 Sampling for tests. A random sample of items shall be selected from each lot offered to the Government in accordance with MIL-STD-105 at inspection level S-4. In terms of defects per 100 units, the acceptable quality level shall be 6.5.

Source: https://assist.dla.mil Downloaded: 2026-10-18T05:29Z
Check the source to verify that this is the current version before use.

4.5 Examination. Each random sample shall be examined to verify compliance with this specification. Examination shall be conducted as specified in Table I.

TABLE I. Classification of defects.

Categories	Defects	Requirement
Critical:	None define.	
Major:		
101	Design and construction not as specified.	3.1
102	Overall dimensions not as specified.	3.1
103	Parts not manufactured to interchangeable standards.	3.3
104	Bed dimensions not as specified.	3.4
105	Steel not as specified.	3.5.1
106	Springs not as specified.	3.5.2
107	Sound deadening material not as specified.	3.5.3
108	Laminated plastic not of grade specified.	3.5.4
109	Accessories not as specified.	3.6
110	General construction requirements not as specified.	3.7.1
111	Location of spot welds not as specified.	3.7.1.1
112	Spot weld visibly distorting or dimpling exposed surfaces not filled and ground smooth.	3.7.1.1
113	Exposed projection weld not ground flush as specified.	3.7.1.1
114	Application of sound deadening material not as specified.	3.7.1.2
115	Case tops not as specifed.	3.7.2
116	Case frame construction not as specified.	3.7.2
117	Leg construction not as specified.	3.7.2
118	Case drawer runners not as specified.	3.7.2
119	Drawers not of box-type construction.	3.7.2.1
120	Drawer sheet steel not of thickness specified.	3.7.2.1
121	Drawer flanges not of dimensions specified.	3.7.2.1
122	Stops for drawers not provided.	3.7.2.1
123	Drawer body does not extend to within 1-1/2-inches of case rear.	3.7.2.1
124	Drawer center divider not provided, when required.	3.7.2.1
125	Drawer locking mechanism not of type specified.	3.7.2.2
126	Construction details of individual	

Source: https://assist.dla.mil - Downloaded: 2026-10-18T05:29Z
Check the source to verify that this is the current version before use.

TABLE I. Classification of defects continued.

Categories	Defects	Requirement
	items not as specified.	3.7.3
127	Finish coat not as specified.	3.8
128	Surface preparation not as specified.	3.8.1
129	Primer coat not as specified. (production inspection)	3.8.2
130	Top case item not covered with laminated plastic sheet, when specified.	3.8.4
131	Workmanship: steel fabrication welding, and riveted connections not as specified.	3.9
Minor:		
201	Laminated plastic not of color, pattern, or finish specified.	3.5.4
202	Drawers not close against rubber bumpers.	3.7.2
203	Finish coat not color specified.	3.8.2
204	Identification marking missing or not located as specified.	3.10

4.6 Performance tests. Each of the sample case items selected in accordance with 4.4.2 shall be tested as specified below.

4.6.1 Tables and desks. Tables and desks shall be set upon a true level surface. Pressures shall be applied to each corner separately to detect support point not making contact.

4.6.2 Drawers. Drawers shall loaded and shall be moved the full travel distance to detect rough surfaces and binding or looseness.

4.6.3 Spot welds. Spot welds shall pass the peel test specified in MIL-W-12332.

4.7 Packaging inspection. The preservation-packaging, packing, and marking of the items shall be inspected to determine conformance to the requirements of section 5 of this specification.

5 PACKAGING

5.1 Preservation-packaging. Preservation-packaging shall be level A or C, as specified (see 6.1).

5.1.1 Level A. All finished exterior surfaces of the furniture shall be protected by being wrapped with kraft paper having a minimum basic weight of 60 pounds, or plastic film having a minimum thickness of 4 mils. Wraps shall be secured in place with tape or twine. To prevent marring and

Source: https://assist.dla.mil - Downloaded: 2026-10-18T05:29Z
Check the source to verify that this is the current version before use.

puncturing furniture surfaces, components such as corner locks on bedsprings and end panels shall be cushioned with cellulosic cushioning material and securely fastened in place. Loose hardware shall be placed in paperboard or fiberboard boxes, and any loose hardware items subject to damage by direct contact with each other shall either be placed in cotton drawstring bags, plastic bags, or wrapped in kraft paper prior to being placed in the boxes. Bed dolly container shall include assembly instructions (see 3.7.3.3.1). Drawers shall be securely fastened in the closed position to prevent movement and possible damage. When adapters are to be furnished with the bunk bed (see 3.7.3.4.1), they shall be cushioned, wrapped, and secured in an appropriate location with the bed spring unit. Mirrors shall be packaged in fiberboard boxes. The mirrors shall be protected within the fiberboard boxes with the cellulosic cushioning material specified above and with single wall corrugated fiberboard sheets scored to form cell spacers and spring pads to provide an air space on all sides of the mirrors.

5.1.2 Level C. The furniture shall be packaged in accordance with the supplier's standard practice.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.1).

5.2.1 Level A. The packaged furniture shall be packed in close-fitting wood-cleated plywood boxes conforming to PPP-B-601 (overseas type) or nailed wood boxes conforming to PPP-B-621 (class 2). The furniture items shall be packed individually except in instances where two or more like items may be packed together to effect a reduction in shipping cube without loss of physical protection for the items. The mirrors shall be packed together in quantities which will not exceed the weight limitations of the applicable box specification. The boxes shall be provided with waterproof case liners conforming to MIL-L-10547 and sealed in accordance with the appendix thereto. Contents of boxes shall be blocked and braced to prevent movement within the boxes. All furniture item shipped with legs installed shall have the item suspended within the shipping container so that the legs do not support the item. Suspension shall provided by fiberboard forms, wood framing, or corner pads positioned to bear on structural frame members of the furniture item. Clearance between any part of the legs and any adjacent surfaces shall be at least 3/4-inch. The blocking, bracing, suspensioning, and supporting shall be accomplished in a manner which will not damage surfaces and frame members of the furniture. The boxes shall be closed and strapped in accordance with the applicable box specification.

5.2.2 Level B. The packaged furniture shall be packed in close-fitting wood-cleated fiberboard, wood-cleated plywood, nailed wood, or triple wall fiberboard boxes conforming to PPP-B-591 (domestic type), PPP-B-601 (domestic type), PPP-B-621 (class 1), and PPP-B-640 (class 1), respectively. The furniture items shall be shipped individually except in instances where two or more like items may be packed together to effect a reduction in shipping cube without loss of physical protection for the items. The mirrors shall be packed together in quantities which will not exceed the weight limitations of the applicable box specification. Contents of boxes shall be blocked and braced to prevent movement within the boxes. All furniture items shipped with legs installed shall have the item suspended within the shipping container so that the legs do not support the item.

Source: https://assist.dla.mil Downloaded: 2026-10-18T05:29Z
Check the source to verify that this is the current version before use.

Suspension shall be provided by fiberboard forms, wood framing, or corner pads positioned to bear on structural frame members of the furniture item. Clearance between any part of the legs and any adjacent surfaces shall be at least 3/4-inch. The blocking, bracing, suspensioning, and supporting shall be accomplished in a manner which will not damage surfaces and frame members of the furniture. The boxes shall be closed and strapped in accordance with the appendix to the applicable box specification.

5.2.3 Level C. The furniture shall be packed in manner which will insure arrival at destination in satisfactory condition and which will be acceptable to the carrier at lowest rates. Containers and packing shall comply with Uniform Freight Classification Rules or National Motor Freight Classification Rules, and the details therein for the appropriate package number utilized. All furniture items shipped with legs installed shall have the item suspended or supported, as required for the package number utilized. In no case shall legs be permitted to rest on the bottom of the container.

5.3 Marking. Exterior shipping containers shall be marked in accordance with MIL-STD-129, and marking shall include the fragile item and arrow handling markings specified therein.

6. NOTES

6.1 Ordering data. Procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) Type and size of furniture required (see 1.2).
(c) When first articles are not required (see 3.2).
(d) Color, pattern, and finish of laminated plastic for tops (see 3.5.4, 3.7.2, and 3.8.4).
(e) When casters are required for beds (see 3.6.2).
(f) When knob pull finish other than satin brass is required (see 3.6.5).
(h) When mirror standards are required (see 3.6.7).
(i) When locking mechanism is required (see 3.7.2.2).
(j) When adapter shall be furnished to permit double decking two beds (see 3.7.3.4.1).
(k) Whether right or left hand kneehole is required (see 3.7.3.7 and 3.7.3.7.2).
(l) When other than rounded corners are required for mirrors (see 3.7.3.10).
(m) Specify color and type of finish required for metal parts (see 3.8.3).
(n) Level of preservation and level of packing required (see 5.1 and 5.2).

6.2 First article. When first articles are required, they shall be tested and approved under the appropriate provisions of paragraph 7-104-55 of the Defense Acquisition Regulations (DAR) (formerly ASPR). The first article should be a preproduction sample, a first production item, or it may be standard production item from the contractor's current inventory as specified in 4.3.1. The contracting officer should include specific instructions in all procurement instruments, regarding arrangements for assembly examinations, and approval of the first article.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:29Z
Check the source to verify that this is the current version before use.

6.3 Finish. The contractor, successful bidder, shall submit to the contracting officer, for approval, 3-inch by 5-inch minimum size samples of paint finish he intends to furnish on same material and surface to be used in production.

6.4 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue, due to the extensive changes.

Custodians:
Navy - YD
Air Force - 99
Army - GL

Review Activities
ARMY - MD
NAVY - MS

Preparing activity:
Navy - YD
Project No. 7105-0243

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:29Z
Check the source to verify that this is the current version before use.

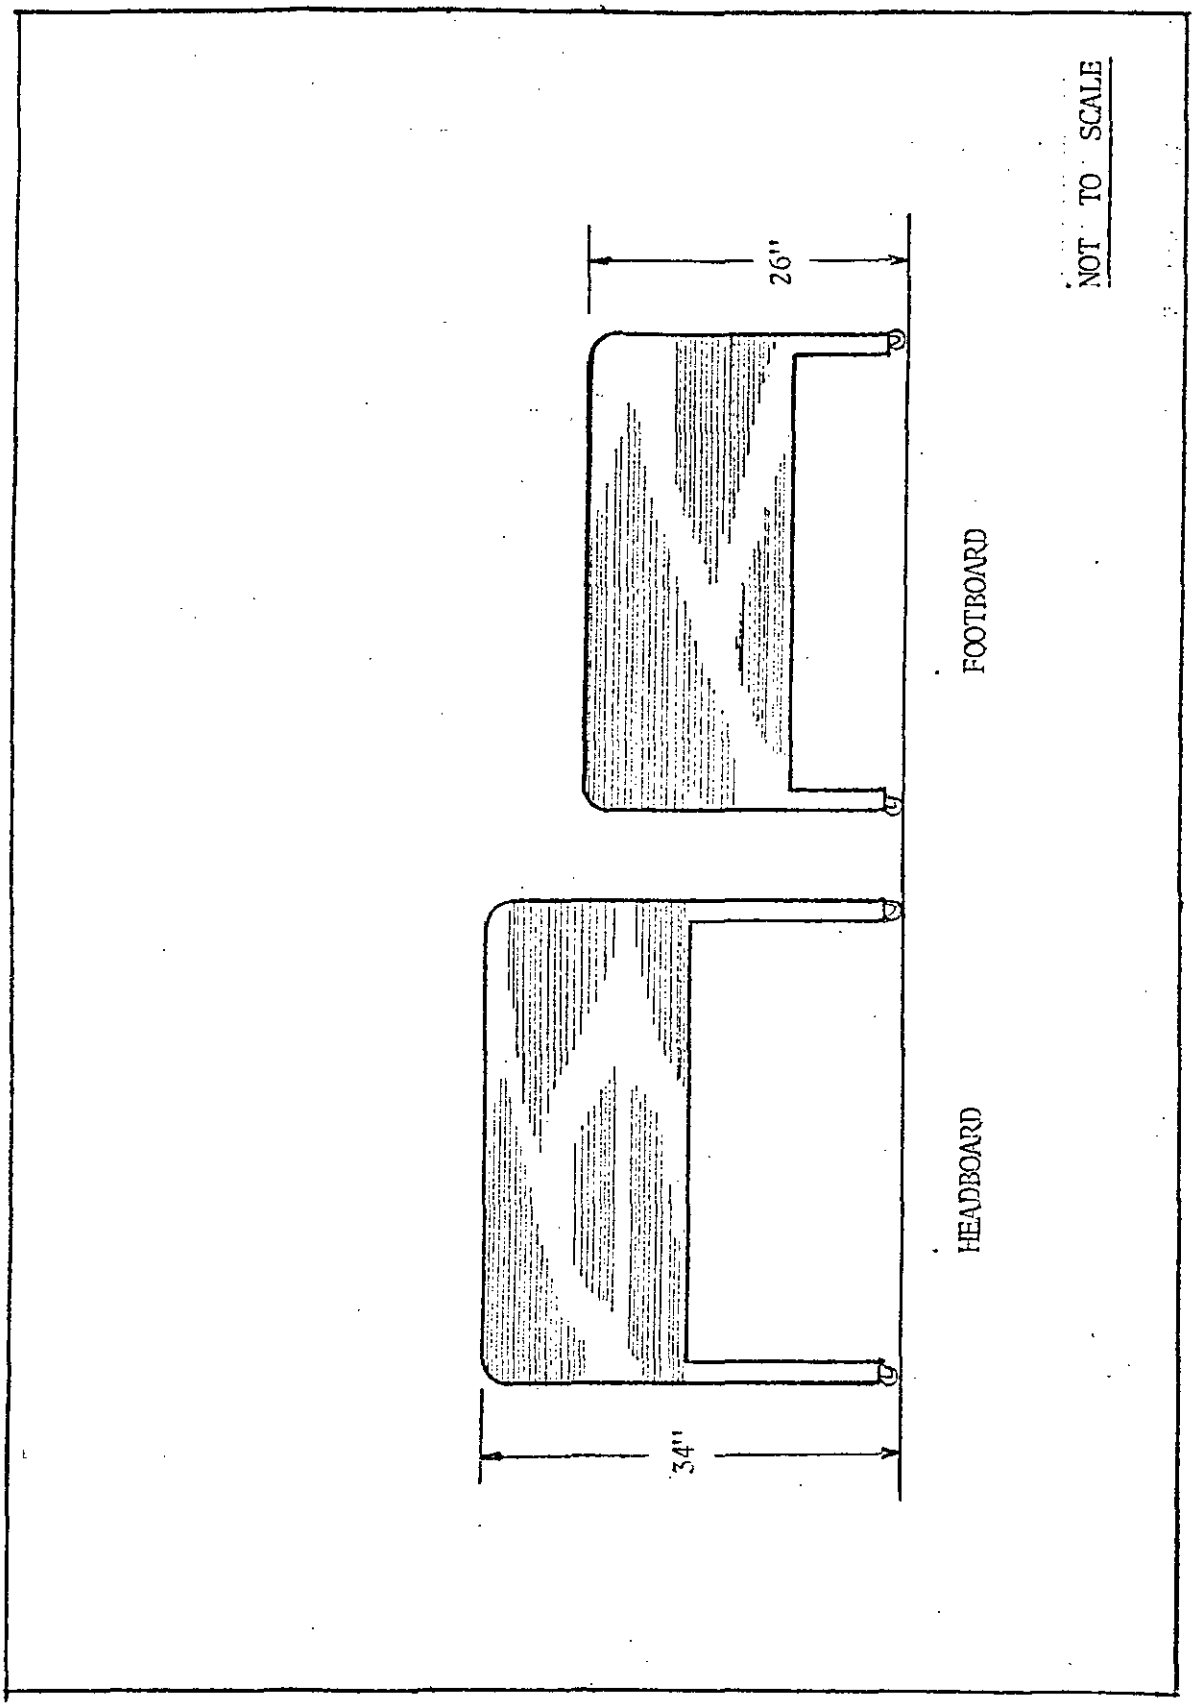


FIGURE 1. Type Ia - Beds, panel, twin and full sizes.

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:29Z
Check the source to verify that this is the current version before use.

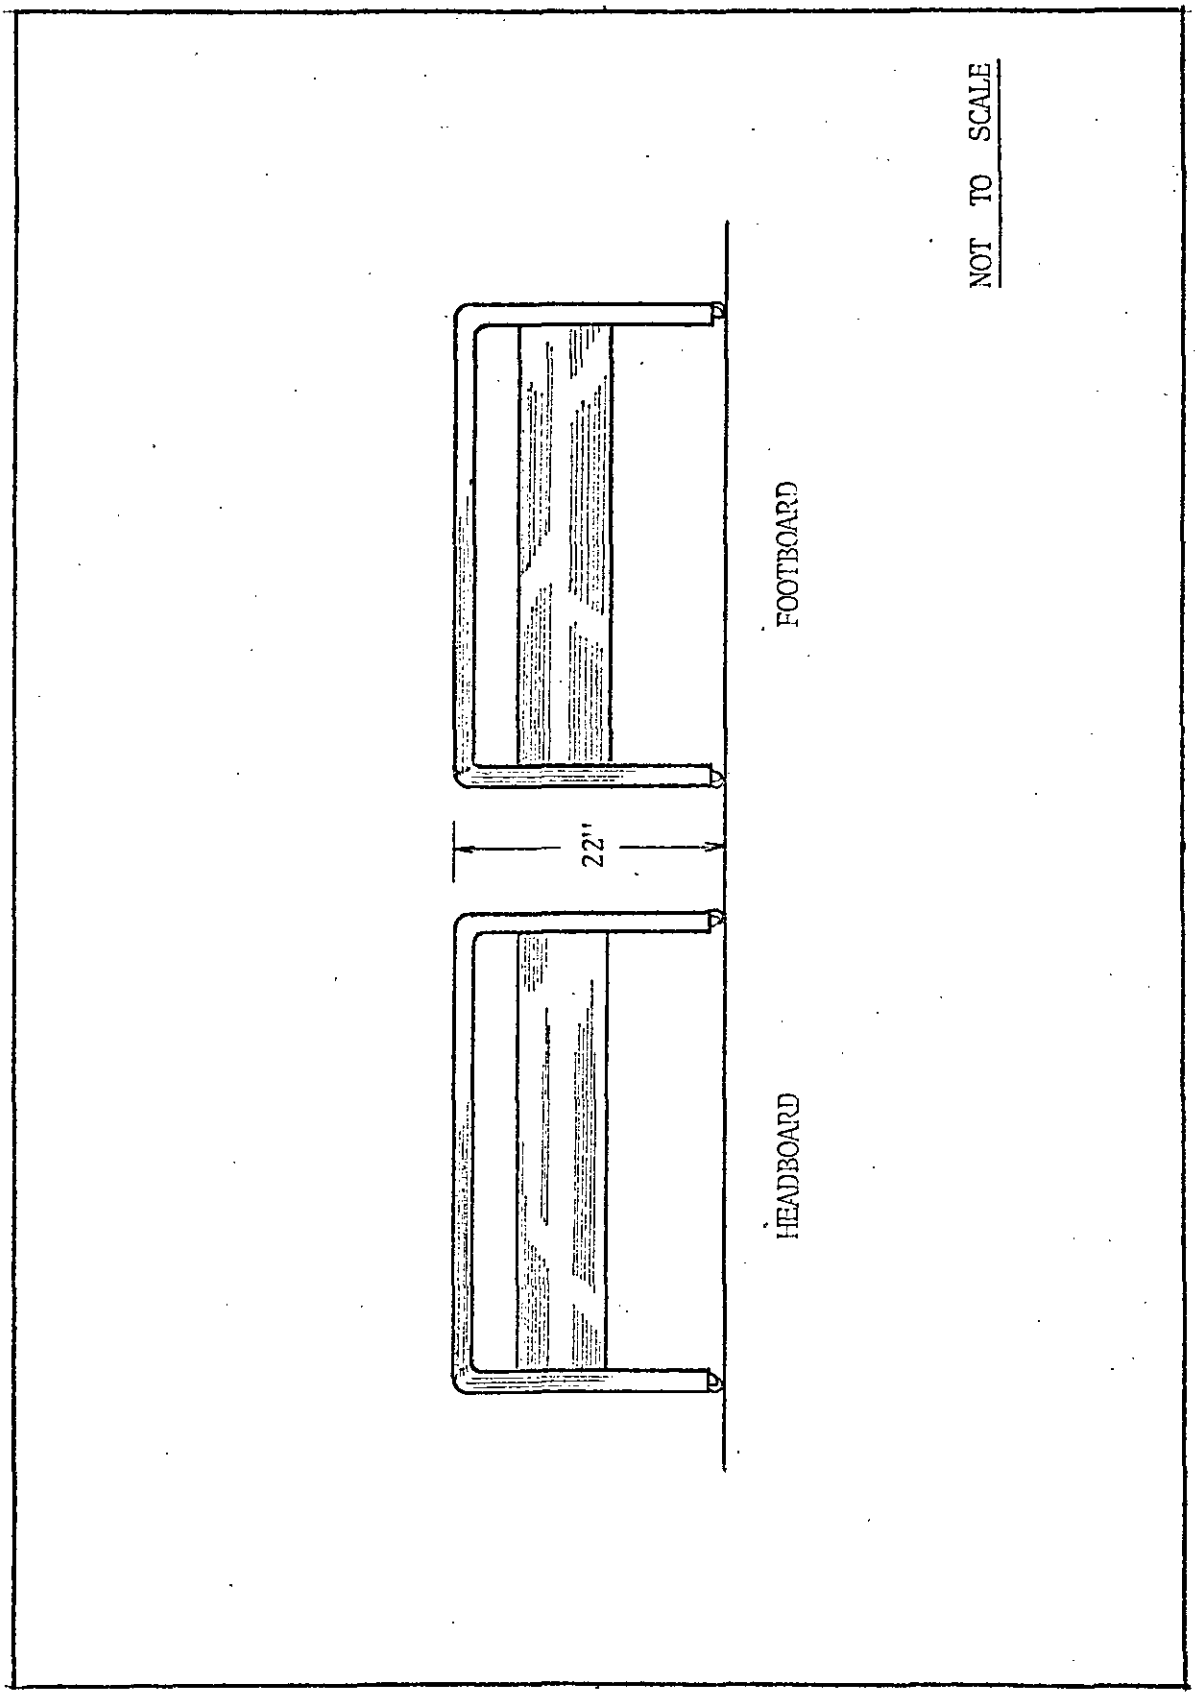


FIGURE 2. Type Ib - Beds, dormitory, 3/0and twin sizes.

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:29Z
Check the source to verify that this is the current version before use.

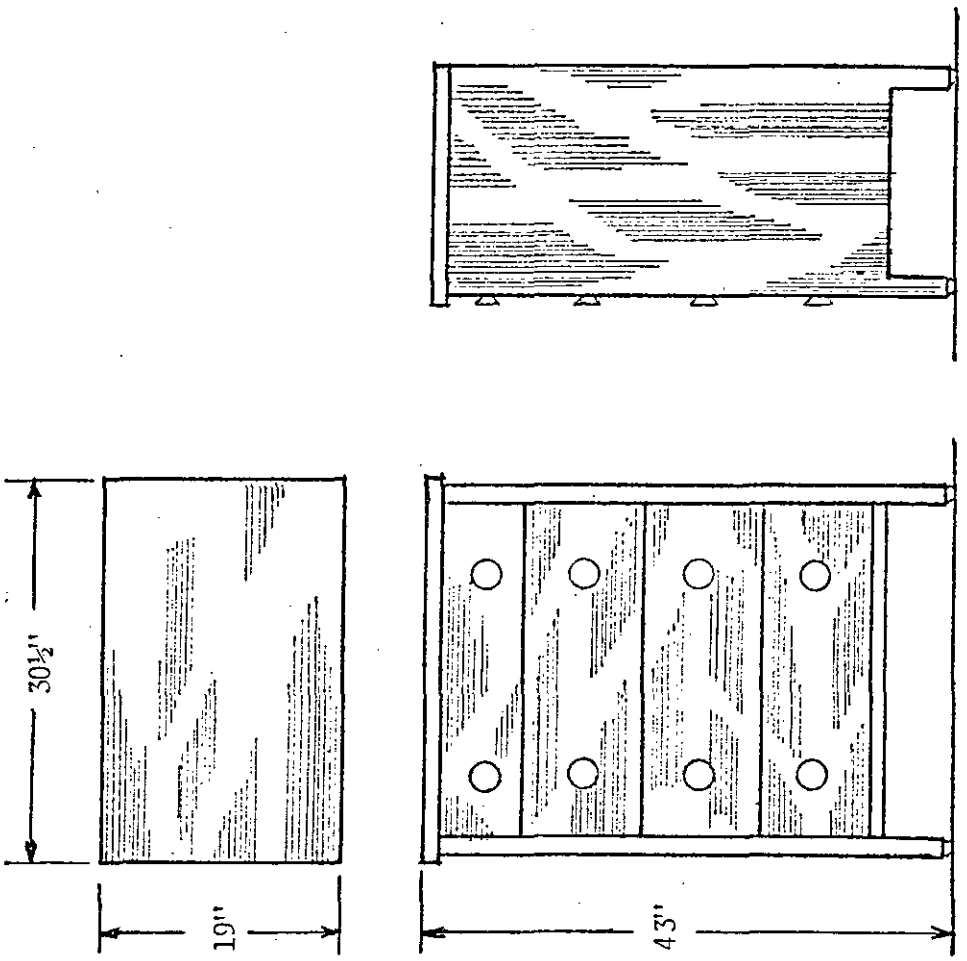


FIGURE 3. Type IIa - Chest, small.

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:29Z
Check the source to verify that this is the current version before use.

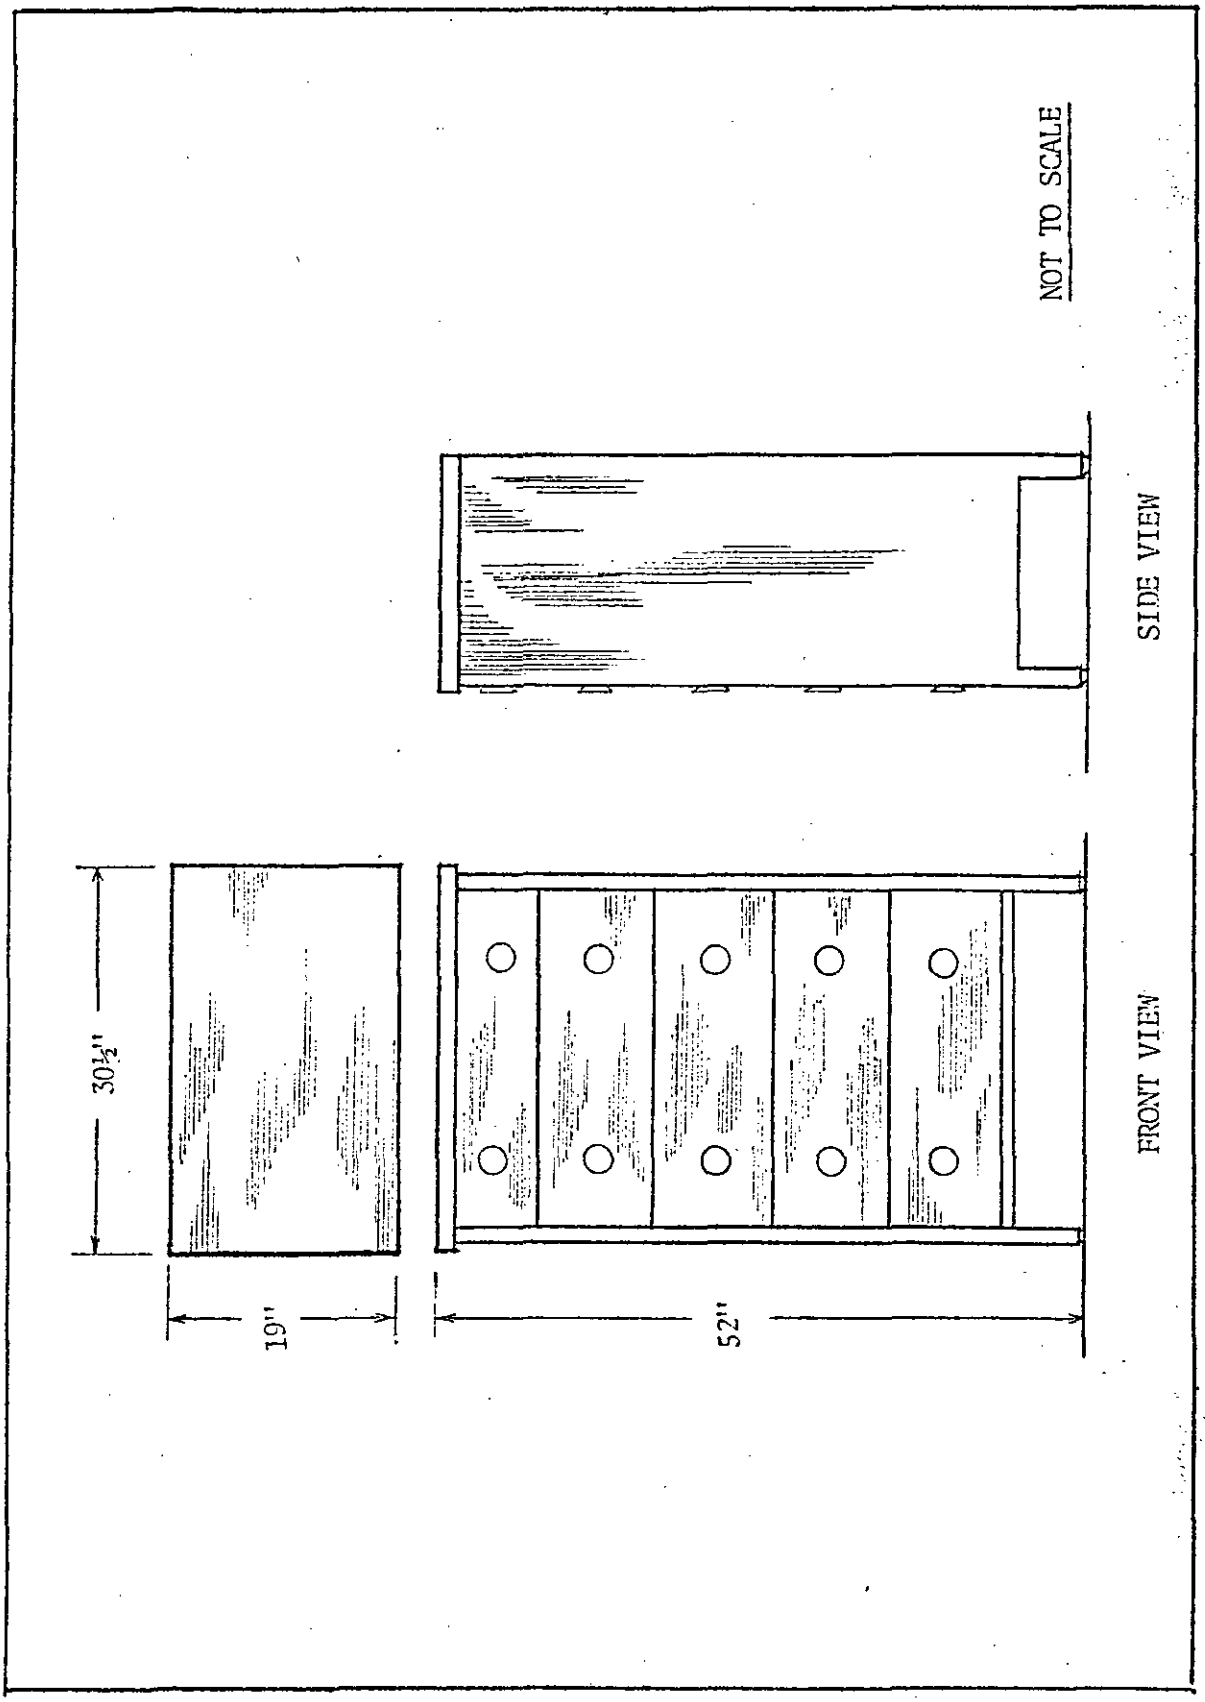


FIGURE 4. Type IIb - Chest, large.

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:29Z
Check the source to verify that this is the current version before use.

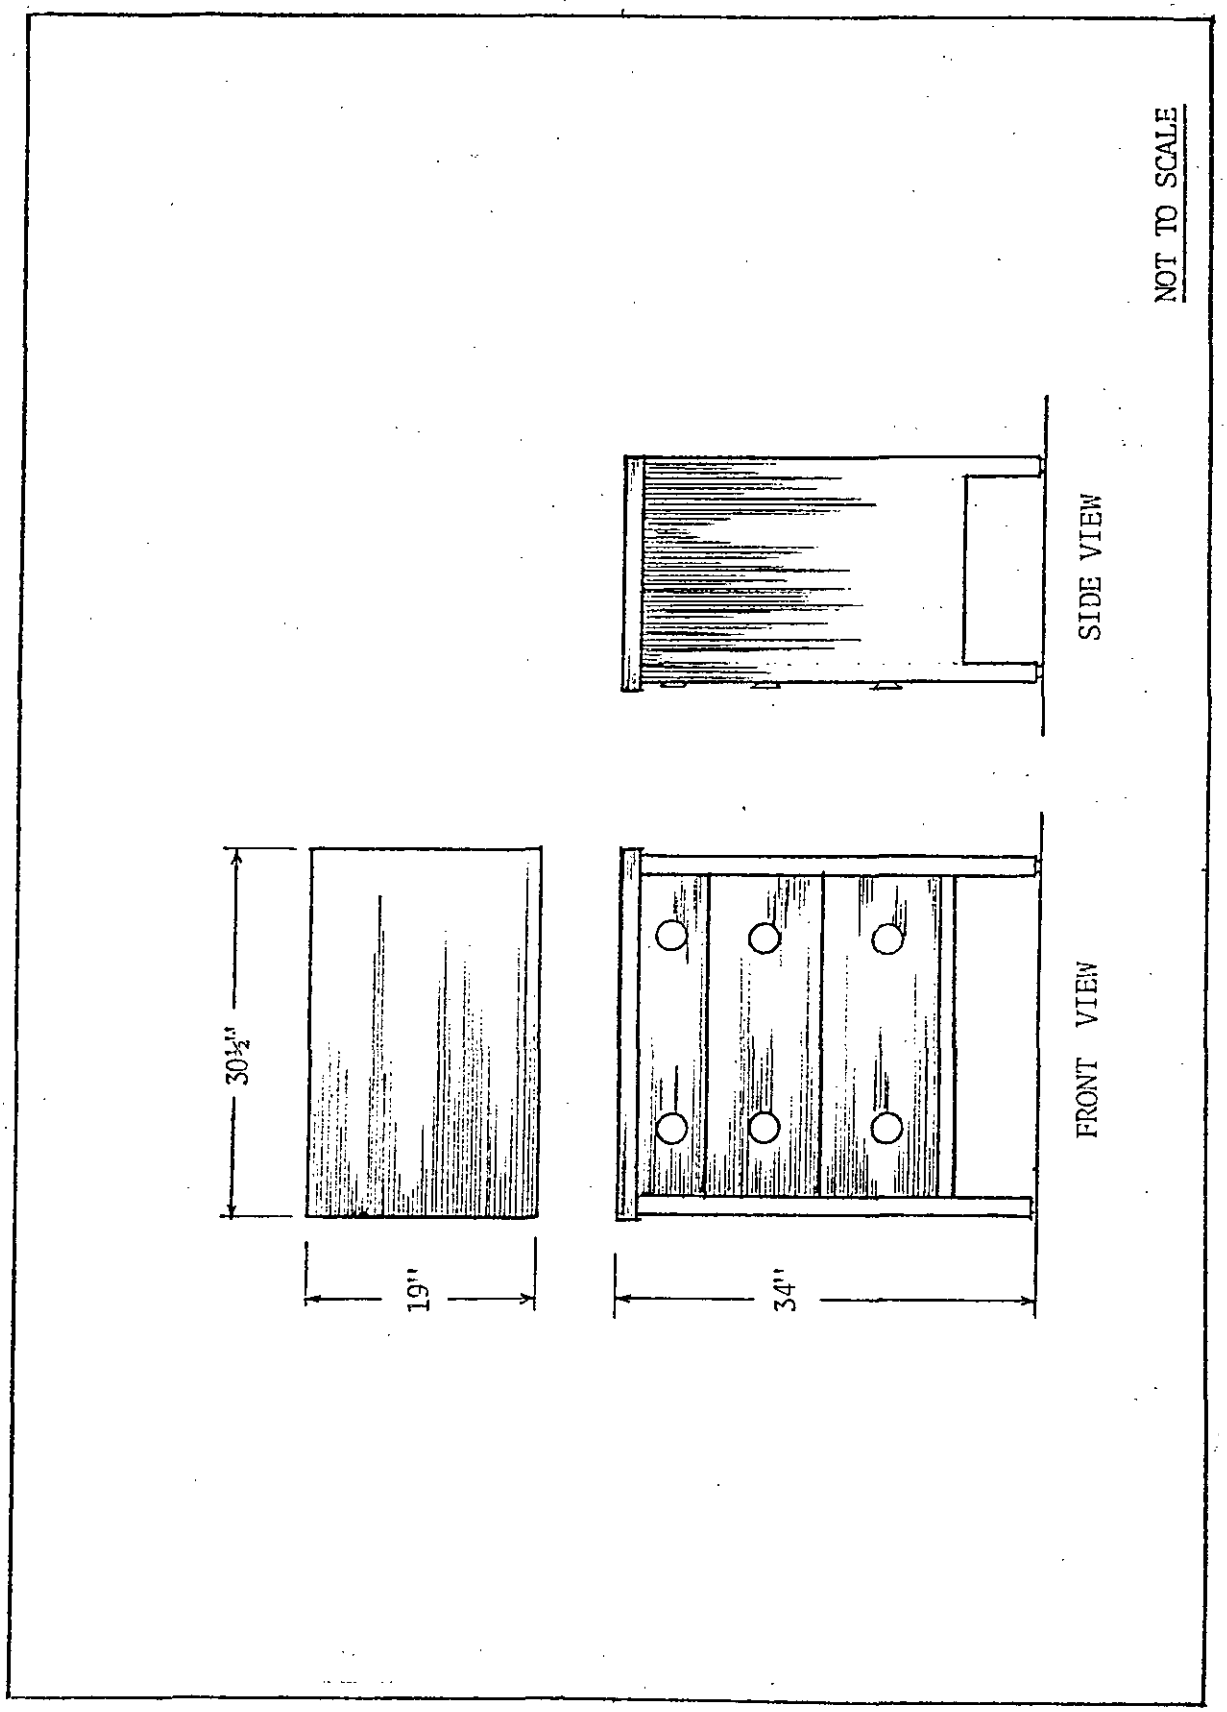


FIGURE 5. Type IIIa - Dresser, small.

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:29Z
Check the source to verify that this is the current version before use.

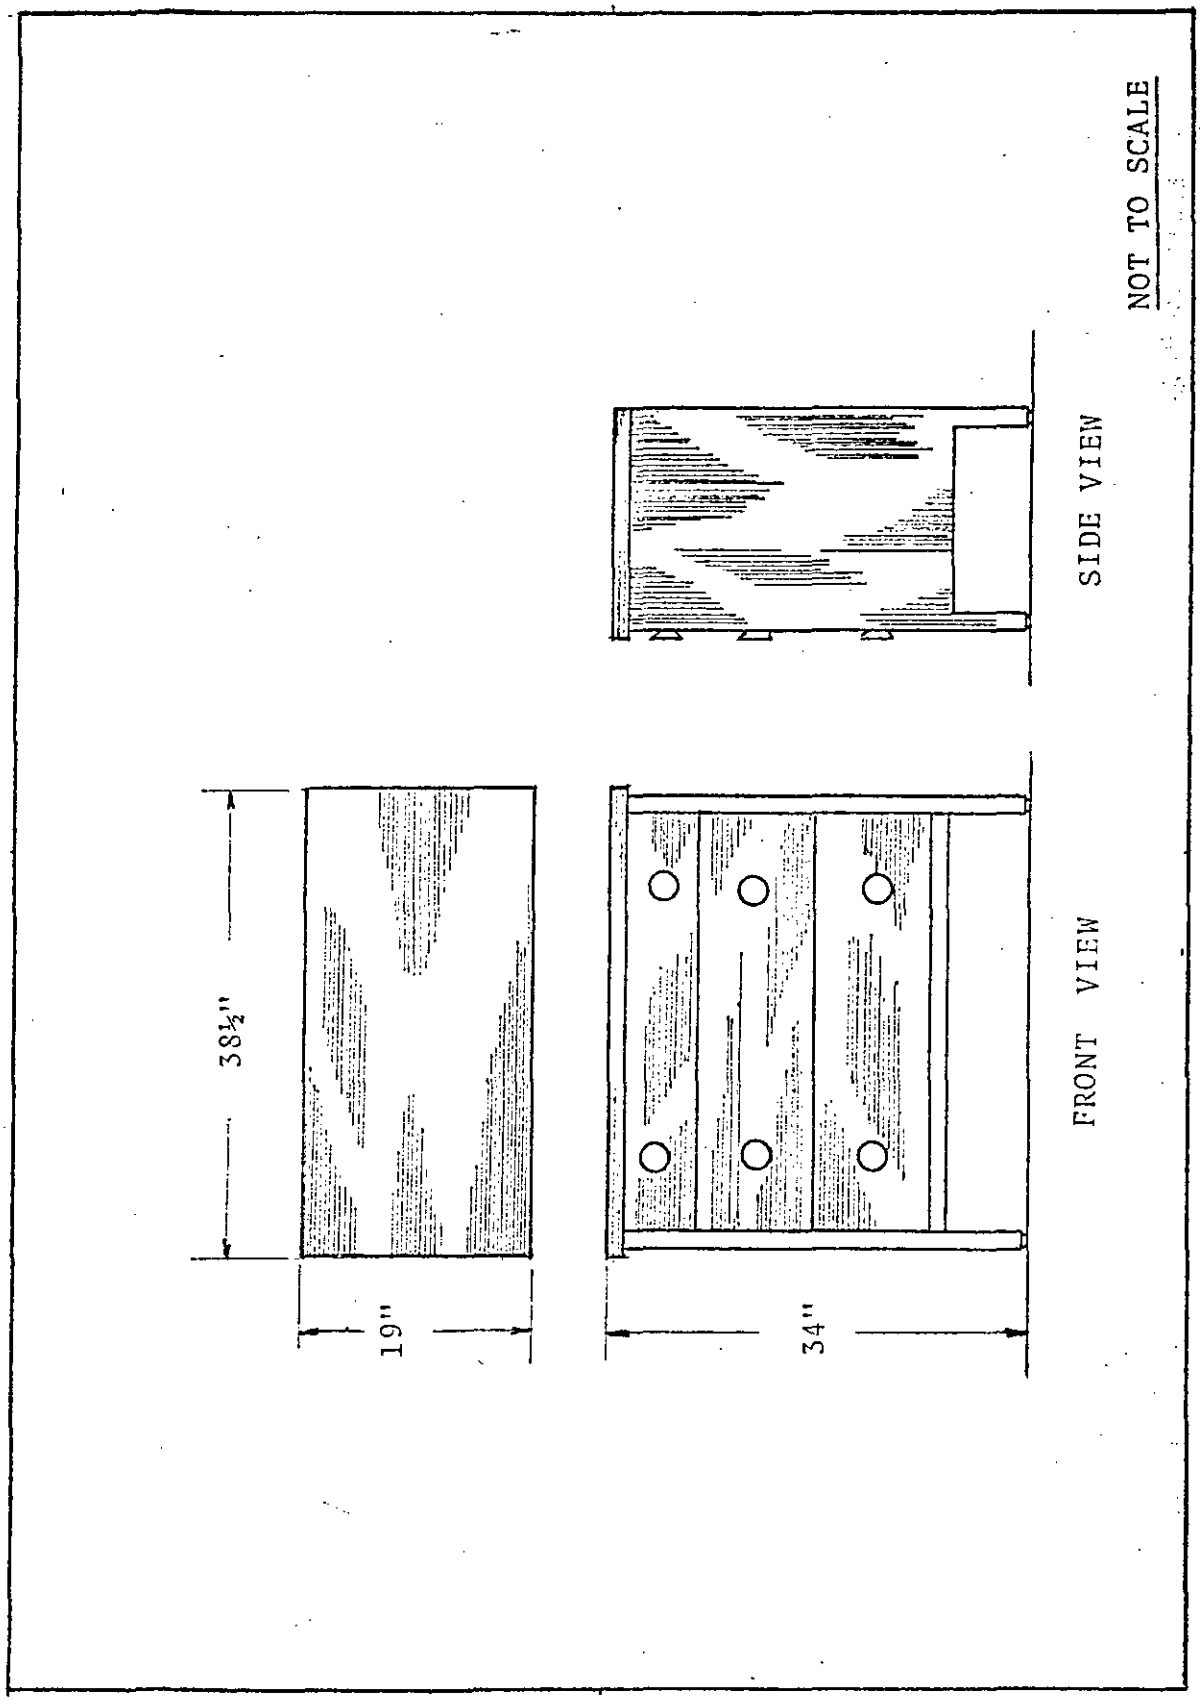


FIGURE 6. Type IIIb Dresser, Large.

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:29Z
Check the source to verify that this is the current version before use.

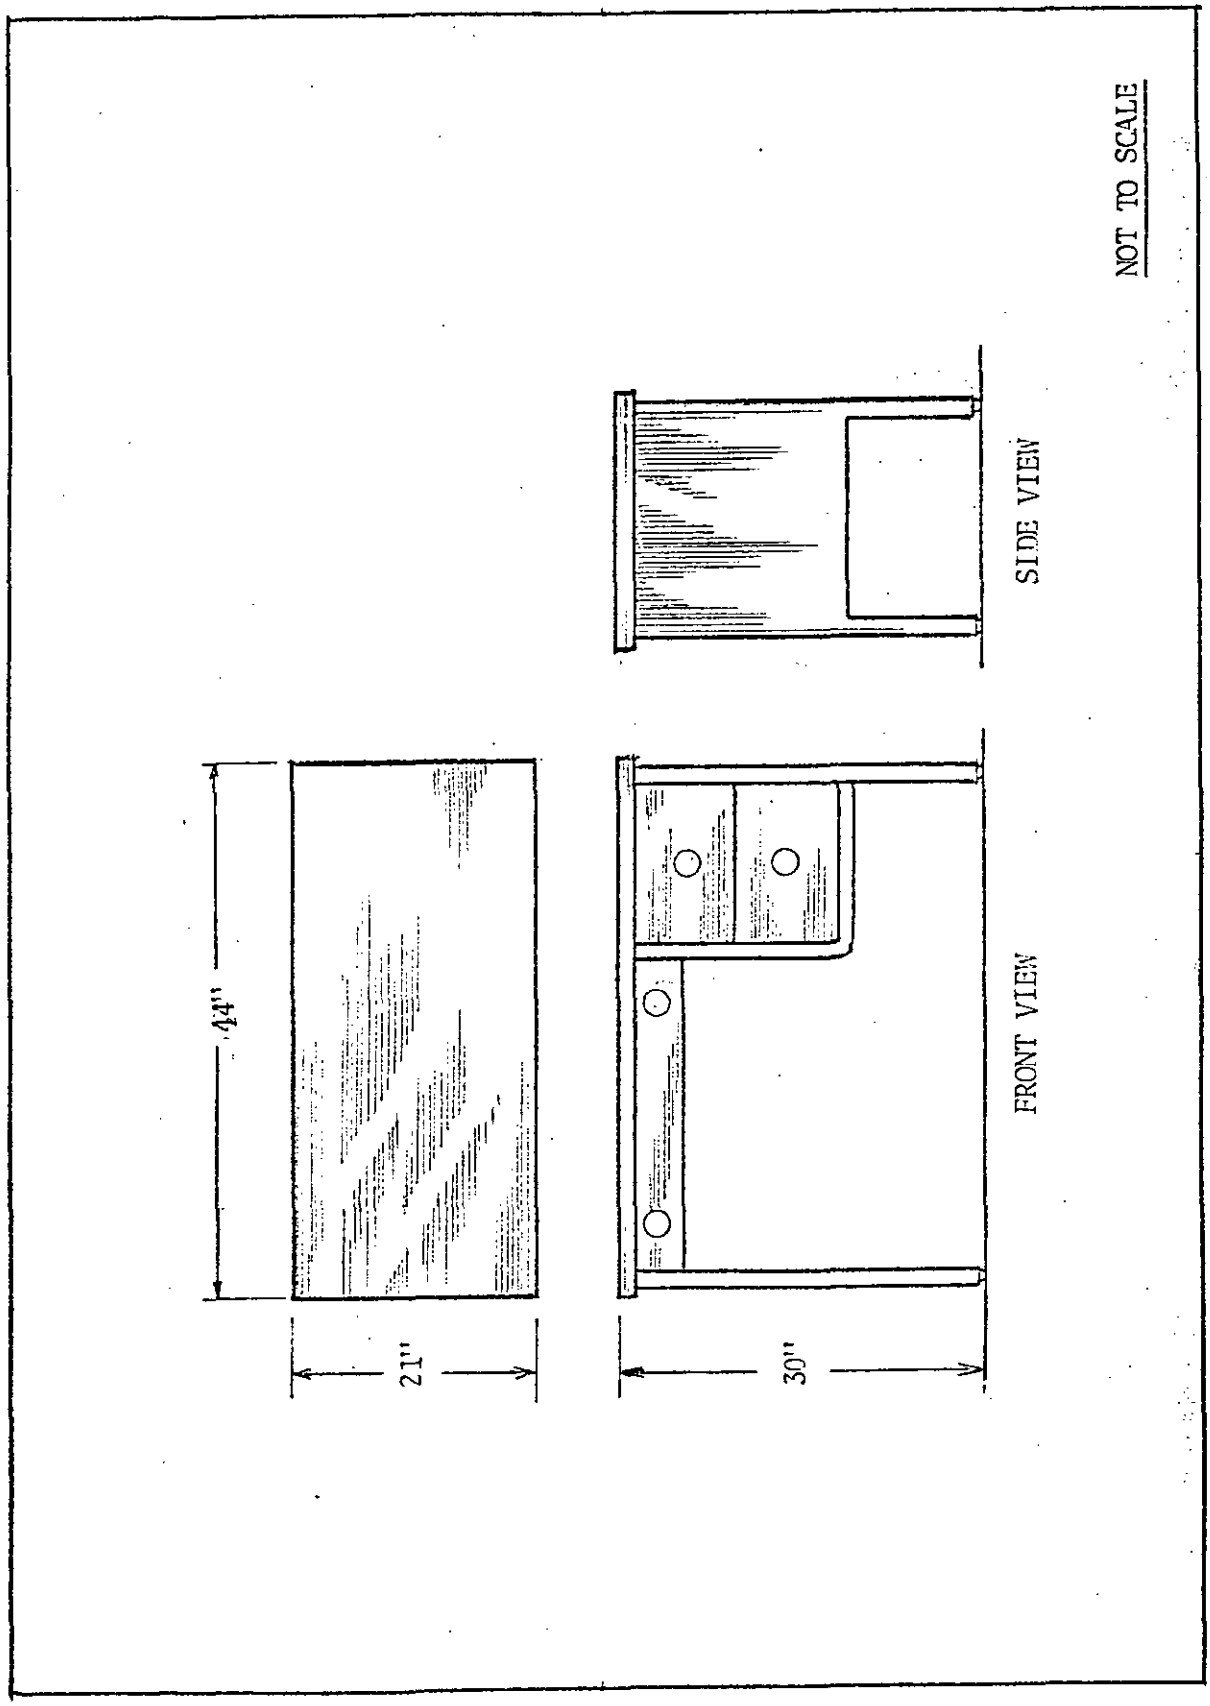


FIGURE 7. Type IVa - Table vanity, left or right knee hole.

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:29Z
Check the source to verify that this is the current version before use.

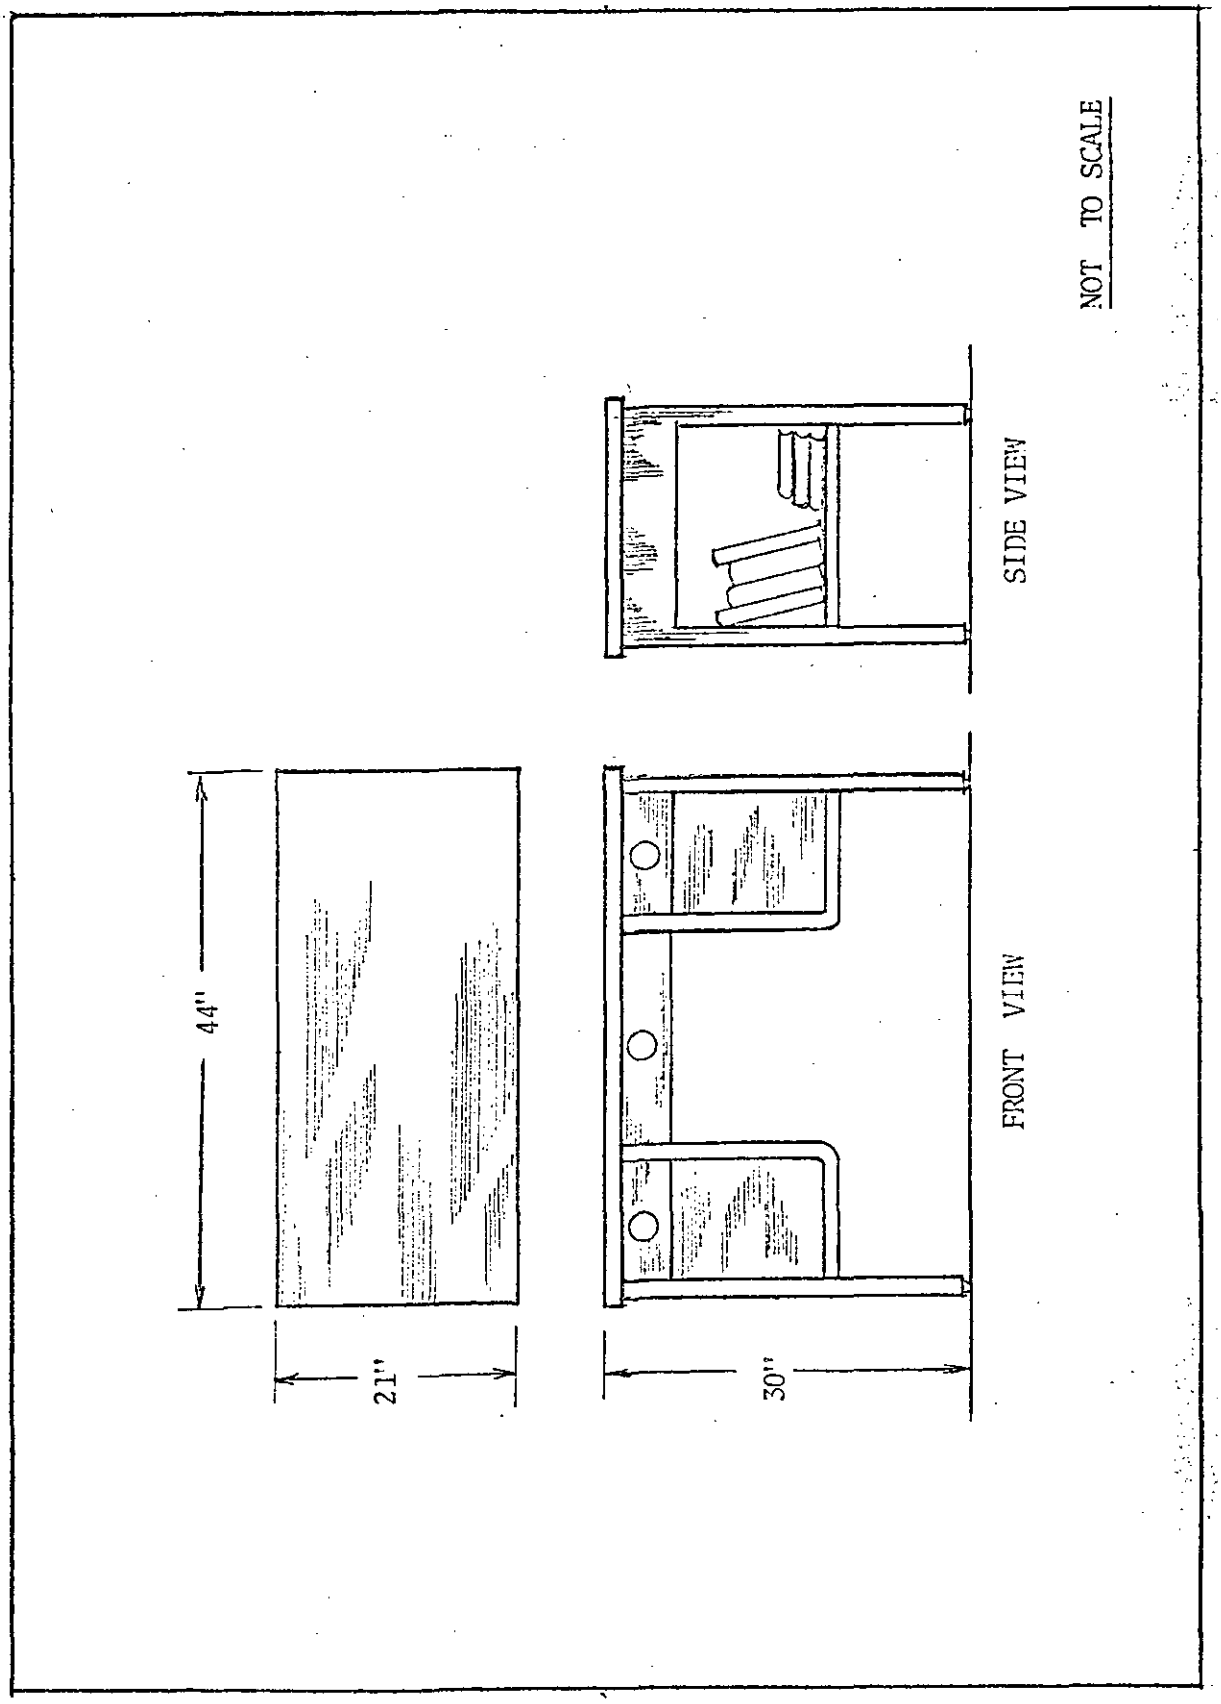


FIGURE 8. Type IVb - Desk, center kneehole.

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:29Z
Check the source to verify that this is the current version before use.

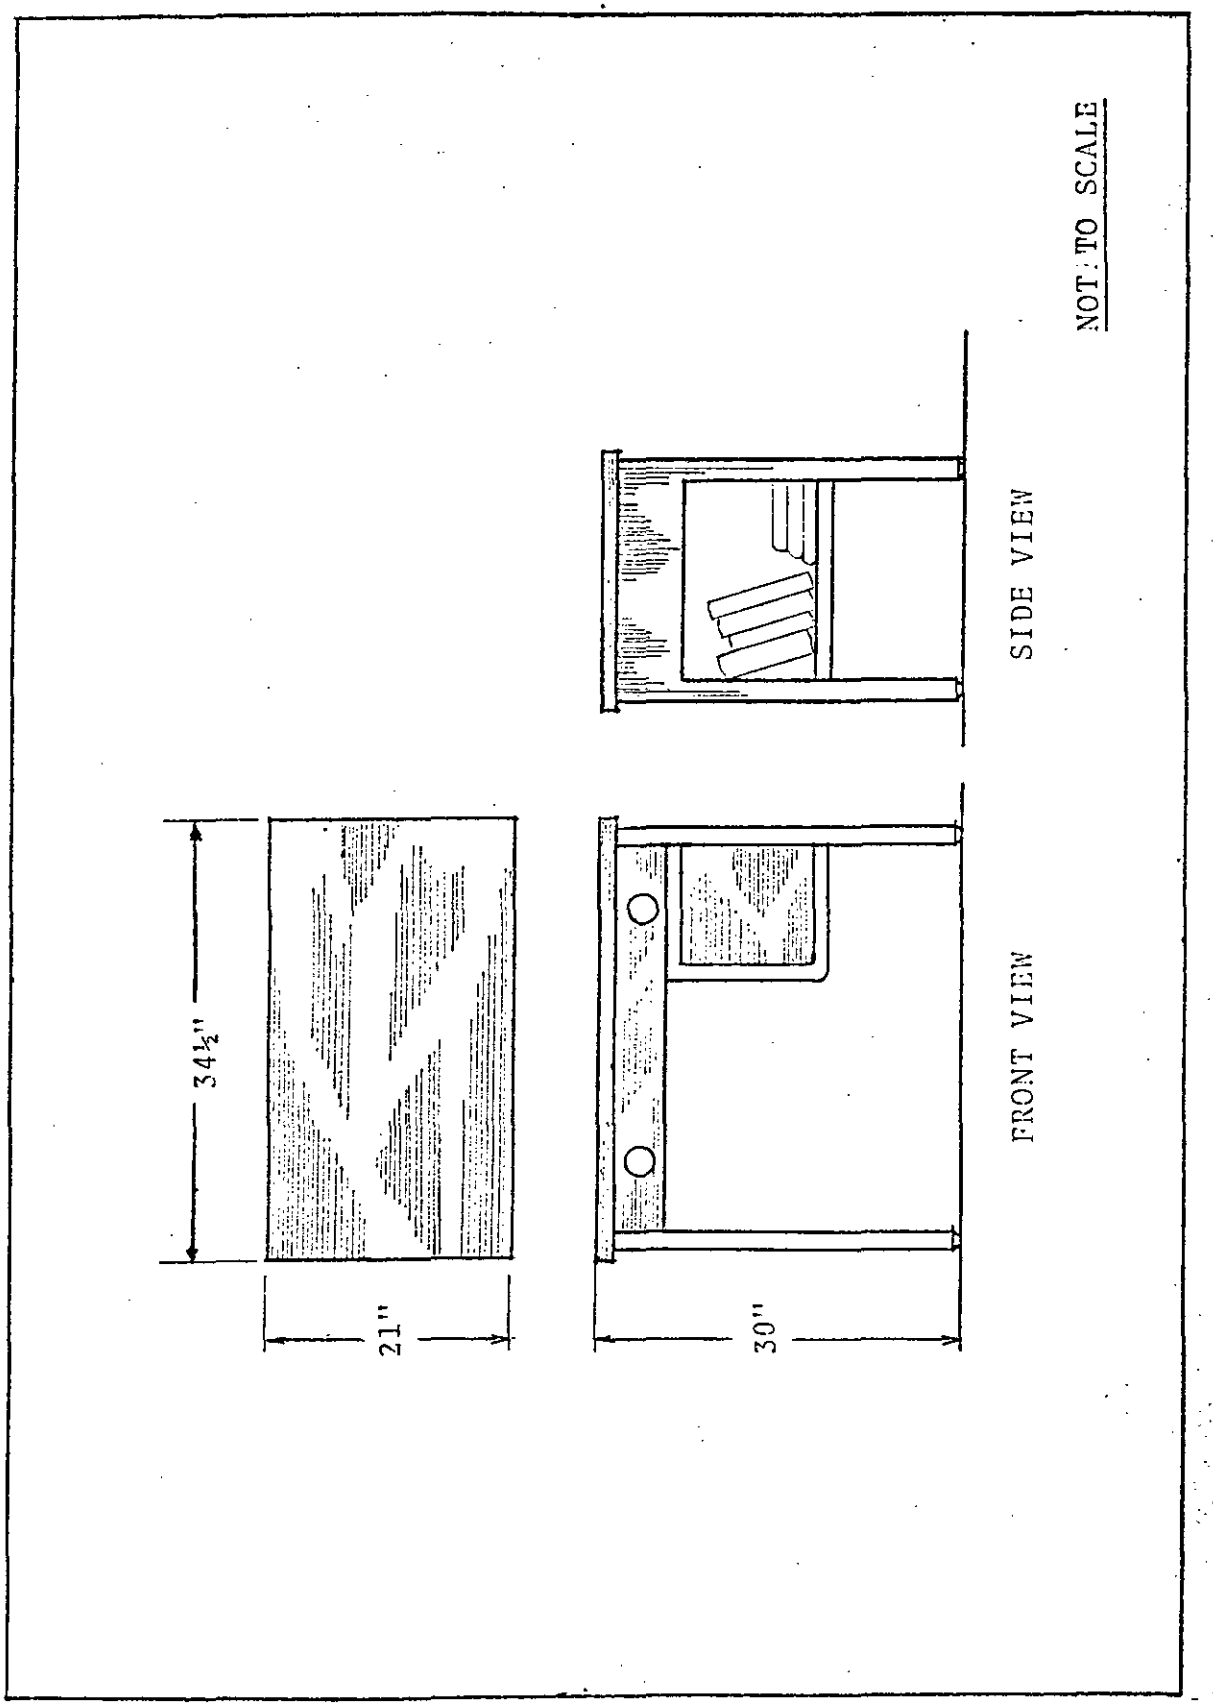


FIGURE 9. Type IVc - Desk, left or right kneehole.

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:29Z
Check the source to verify that this is the current version before use.

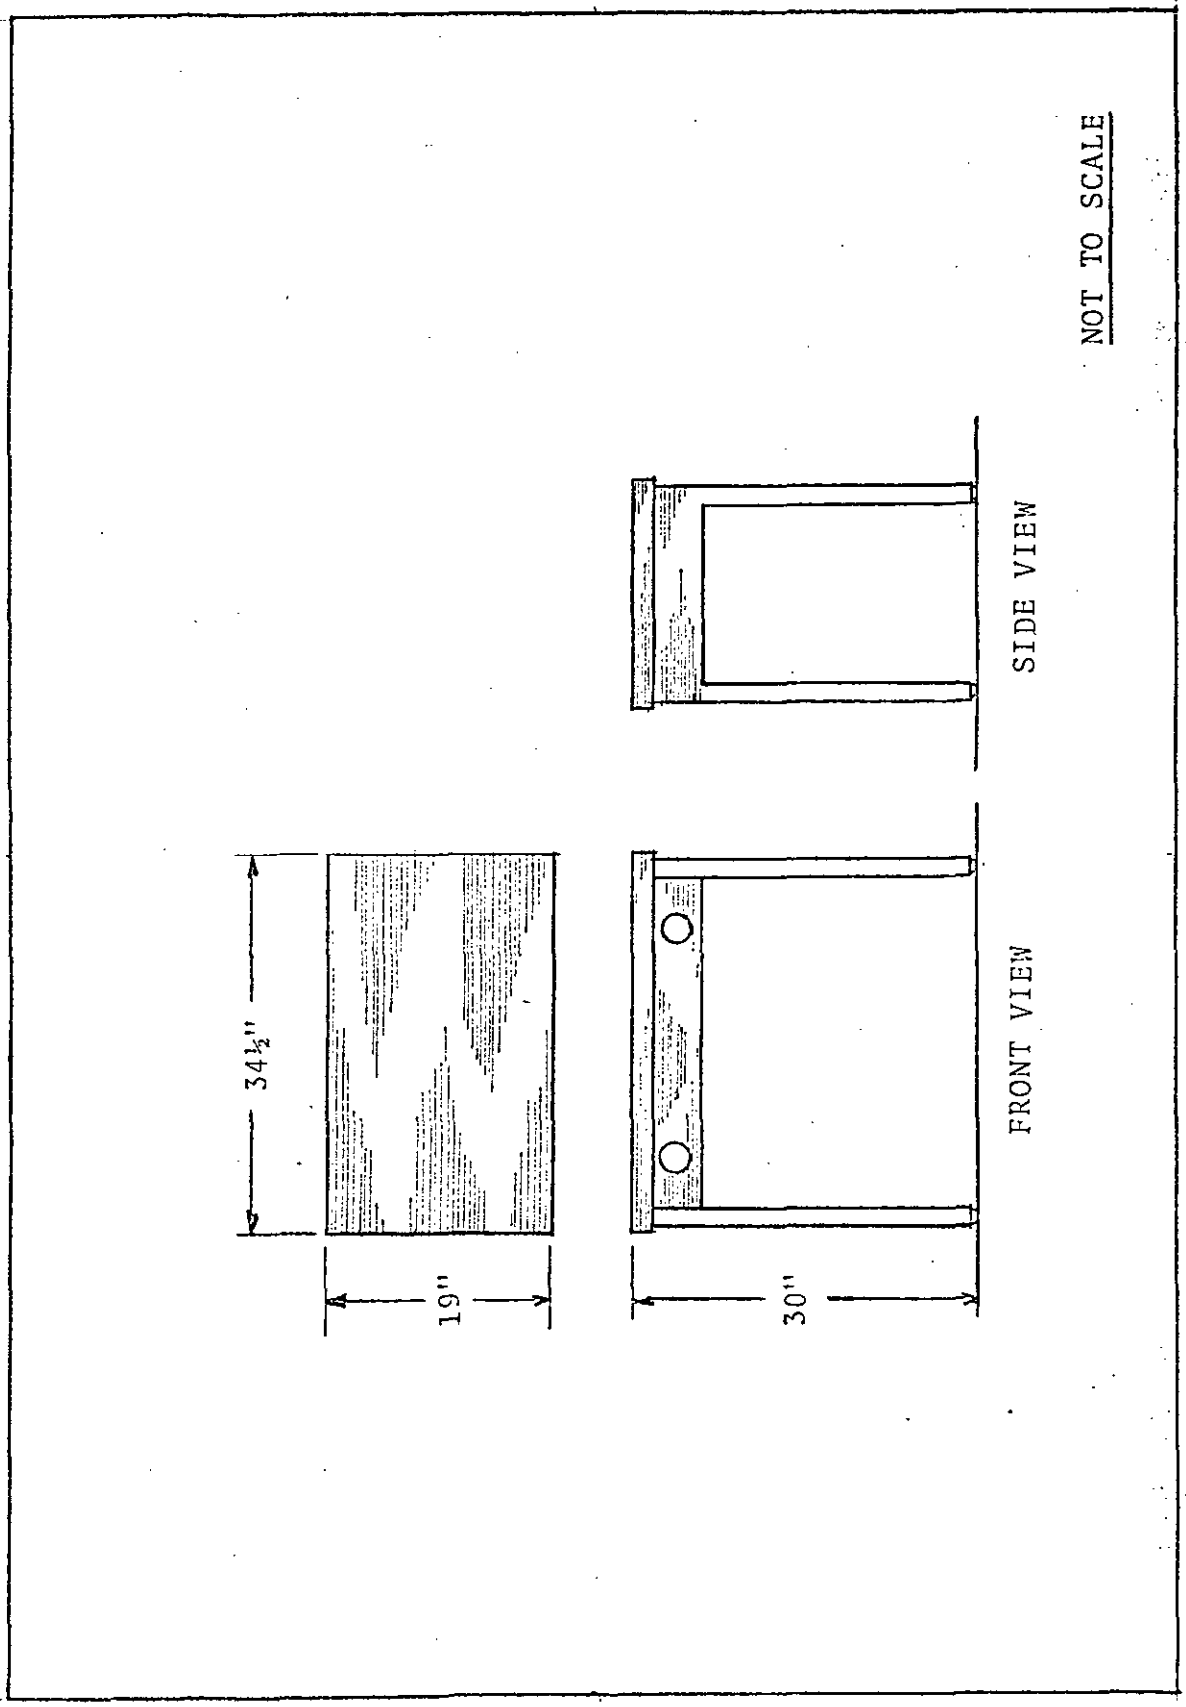


FIGURE 10. Type V - Desk, flat top.

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:29Z
Check the source to verify that this is the current version before use.

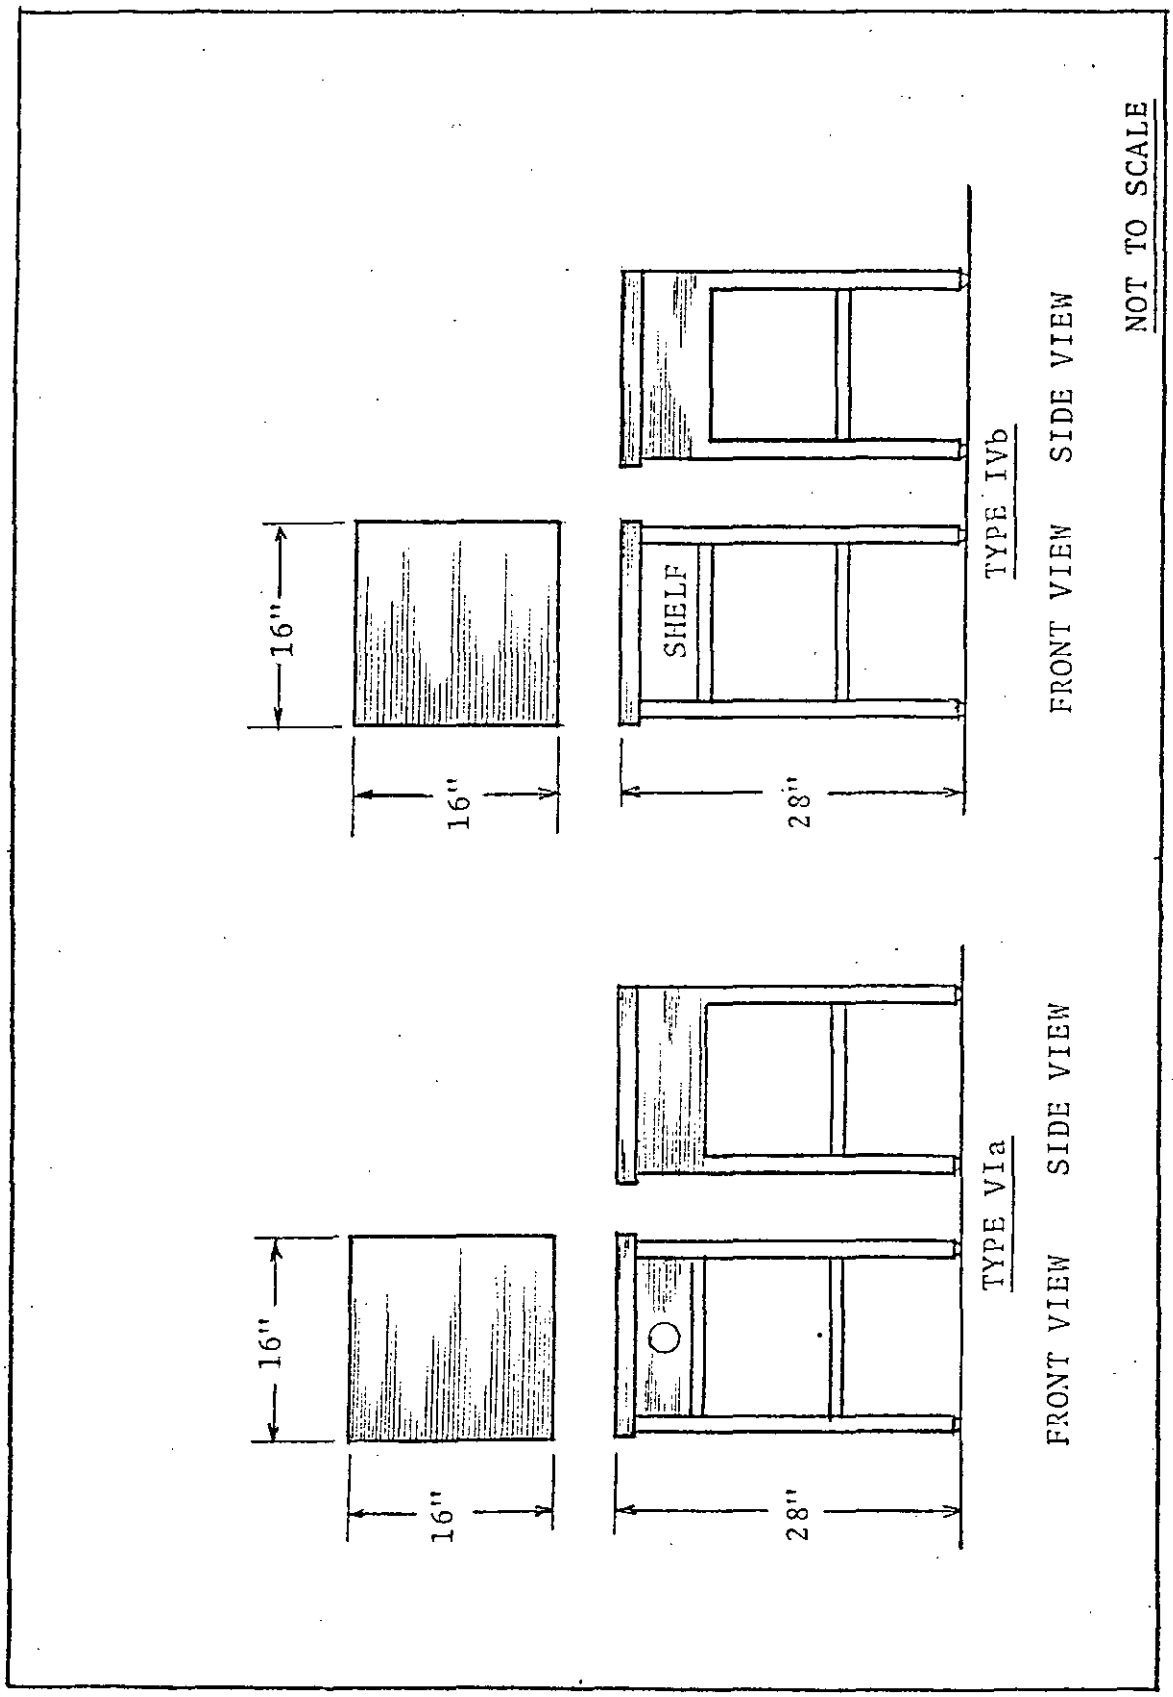


FIGURE 11. Type VIa - Table, night, with drawer.
Type VIb - Table, night, with compartment.

Source: https://assist.dla.mil -- Downloaded: 202640-18T05:29Z
Check the source to verify that this is the currentversion before use.

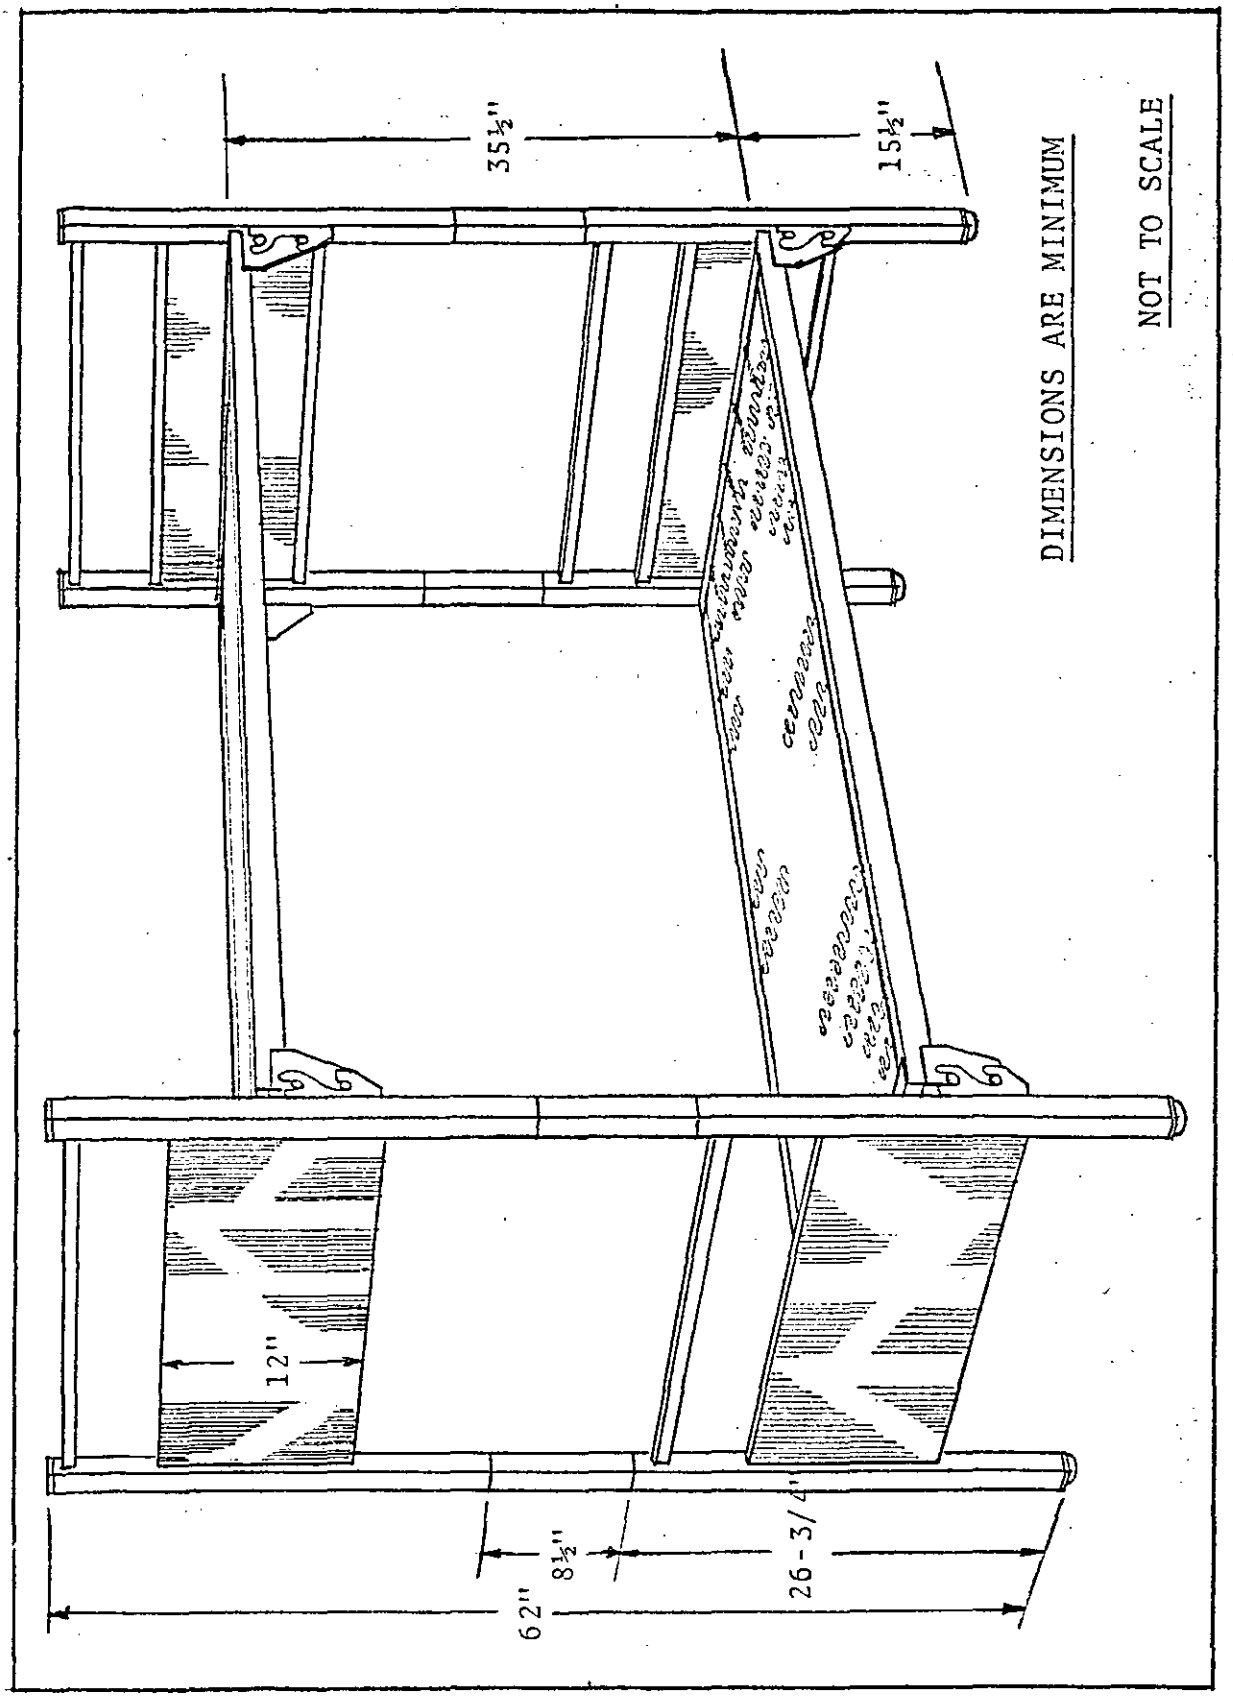


FIGURE 12. Type Id - Bed,bunk (Convertible type), single and double deck, size single, semi-panel style.

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:29Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commanding Officer
Naval Construction Battalion Center (Code 156)
Port Hueneme, CA 93043

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:29Z
Check the source to verify that this is the current version before use.