MIL-R-15058G(SHIPS)
AMENDMENT-2
13 November 1967

SUPERSEDING 1/
Amendment-1
22 April 1966

MILITARY SPECIFICATION

RUBBER, SHAFT COVERING MATERIALS

(FOR MARINE PROPELLER SHAFTS)

This amendment forms a part of Military Specification MIL-R-15058G(SHIPS), 18 February 1965

Page 1 paragraph 1.2, first line: Delete "specificed" and substitute "specified".

Pages 1 and 2, Section 2: Delete and substitute:

"2. APPLICABLE DOCUMENTS

"2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of the specification to the extent specified herein.

SPECIFICATION

MILITARY

MIL-D-16791 - Detergents, Liquid, Nonionic.

STANDARD

FEDERAL

FED-STD-601 - Rubber: Sampling and Testing.

1/ CHANGES FROM PREVIOUS ISSUE. THE OUTSIDE MARGINS OF THIS DOCUMENT HAVE BEEN MARKED "#" TO INDICATE WHERE CHANGES (DELETIONS, ADDITIONS, ETC.) FROM THE PREVIOUS ISSUE HAVE BEEN MADE. THIS HAS BEEN DONE AS A CONVENIENCE ONLY AND THE GOVERNMENT ASSUMES NO LIABILITY WHATSOEVER FOR ANY INACCURACIES IN THESE NOTATIONS. BIDDERS AND CONTRACTORS ARE CAUTIONED TO EVALUATE THE REQUIREMENTS OF THIS DOCUMENT BASED ON THE ENTIRE CONTENT AS WRITTEN IRRESPECTIVE OF THE MARGINAL NOTATIONS AND RELATIONSHIP TO THE LAST PREVIOUS ISSUE.

FSC 5330

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:26Z
Check the source to verify that this is the current version before use.

"(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

"2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

UNIFORM CLASSIFICATION COMMITTEE

Uniform Freight Classification Rules.

(Application for copies should be addressed to the Uniform Classificaion Committee, 202 Union Station, 516 West Jackson Boulevard, Chicago, Illinois 60606.)

INTERSTATE COMMERCE COMMISSION REGULATIONS

49 CFR 71-78 - Rules and Regulations for the Transportation of Explosives and Other Dangerous Articles.

(The Interstate Commerce Commission Regulations are now a part of the Code of Federal Regulations, available from the Superintendent of Documents, Government Printing Office, Washington, D. C. 20402.)

MANUFACTURING CHEMISTS ASSOCIATION, INC.

Manual L-1 - A Guide for Preparation of Warning Labels for Hazardous Chemicals.

(Application for copies should be addressed to the Manufacturing Chemists Association, Inc., 1825 Connecticut Avenue, N. W. Washington, D. C. 20006.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)"

Page 2, paragraph 3.1, second line: Delete "butediene-acrylonitrile"; substitute "butadiene-acrylonitrile".

Page 2, Table I, sixth line: Delete and substitute: "Adhesion to shaft, sleeves, and between".

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:26Z
Check the source to verify that this is the current version before use.

Page 2, paragraph 3.2.1, first sentence: Delete and substitute: "Bearing sleeves, on either end of the surfaces to be covered, shall have a tapered undercut surface as shown on figure 1."

Page 2, paragraph 3.2.2: Delete first line and substitute:

"3.2.2 Shafts.- Shafts and sleeves of bearing, in the areas to be covered, shall be prepared".

Page 3, paragraph 3.2.3: Delete and substitute:

"3.2.3 Test jigs to represent the shaft and the bearing sleeves.- Two test jigs of the metal in the shaft and two test jigs of that in the bearing sleeves will be required for each shaft. The metals used in the test jigs shall be the same used in the sleeves and shaft they represent. Unless otherwise specified (see 6.1), the test jigs shall be supplied by the contractor. The test jigs shall be at least four inches in diameter and at least six inches long. The jigs may be suitable pipe sections to represent either solid or hollow shafts. The ends of the pipe sections shall be closed except for suitable pipe connections. The test jigs shall be covered at the same time as the shaft and bearing sleeves, using the same materials and techniques."

Page 3, paragraph 3.3.3, second sentence: Delete.

Pages 4 and 5: Delete figures 1 and 2 and substitute attached figure 1.

Page 6, paragraph 3.4, second line: Delete "steel" and delete "bronze or monel".

Page 7, paragraph 4.4, second line: Delete "that" and substitute "than".

Page 7, paragraph 4.4.4, line 6: Delete "unitl" and substitute "until".

Preparing activity:
Navy - SH
(Project 5330-N005)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:26Z
Check the source to verify that this is the current version before use.

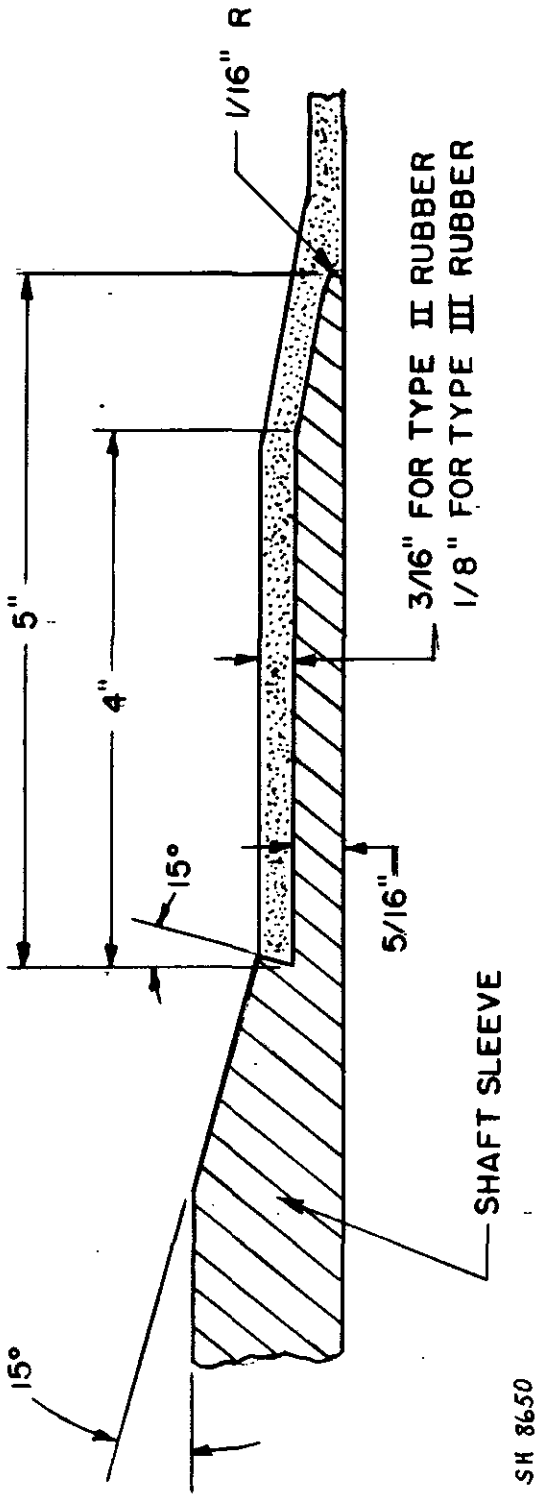


FIGURE 1 - TAPER AND UNDERCUT ON SLEEVES FOR TYPE II AND TYPE III SHAFT COVERING.

☆U.S. GOVERNMENT PRINTING OFFICE: 1967-301-514/2996

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:26Z
Check the source to verify that this is the current version before use.