MIL-C-40100C

2 October 1973

SUPERSEDING
MIL-C-40100B
25 January 1967

MILITARY SPECIFICATION

CABINET, DOUGH PROOFING, PORTABLE, INSULATED, 12-PAN CAPACITY

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers a gasoline heated, portable, field dough proofing cabinet.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids, or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

HH-G-156	-	Gasket Material, General Purpose; Rubber Sheets, Strips, and Special Shapes.
QQ-A-200/8	-	Aluminum Alloy Bar, Rod, Shapes, Tube and Wire, Extruded, 6061.
QQ-A-200/9	-	Aluminum Alloy Bar, Rod, Shapes, Tube, and Wire, Extruded 6063.
QQ-A-225/8	-	Aluminum Alloy Bar, Rod, Wire, and Special Shapes, Rolled, Drawn, or Cold Finished 6061.
QQ-A-250/8	-	Aluminum Alloy, 5052, Plate and Sheet.
QQ-B-654	-	Brazing Alloys, Silver.
QQ-S-634	-	Steel, Bar, Carbon, Cold Finished, (Standard Quality).
QQ-S-635	-	Steel Plate, Carbon.
QQ-S-698	-	Steel, Sheet and Strip, Low-Carbon.
QQ-T-830	-	Tube, Steel, (Carbon, Mechanical; Seamless and Welded).
QQ-W-470	-	Wire, Steel, Carbon, Spring, Music.
QQ-Z-325	-	Zinc Coating, Electrodeposited, Requirements for.
RR-C-271	-	Chains and Attachments, Welded, Weldless, and Roller Chain.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:15Z
Check the source to verify that this is the current version before use.

TT-E-529 - Enamel, Alkyd, Semigloss.
TT-P-1757 - Primer Coating, Zinc Chromate, Low-Moisture-Sensitivity.
UU-P-268 - Paper Kraft, Untreated, Wrapping.
MMM-A-1617 - Adhesive, Rubber Base, General Purpose.
PPP-B-601 - Boxes, Wood, Cleated Plywood.
PPP-B-621 - Boxes, Wood Nailed and Lock-Corner.
PPP-B-636 - Box, Fiberboard.
PPP-T-60 - Tape: Packaging, Waterproof.

MILITARY

MIL-P-116 - Preservation, Methods of.
MIL-B-121 - Barrier Material, Grease-Proofed, Waterproofed, Flexible.
MIL-P-551 - Pipe and Elbows, Air Conditioning-Heating.
MIL-H-639 - Hooks (for Belts, Straps, and Equipage Items).
MIL-C-5541 - Chemical Conversion Coatings On Aluminum and Aluminum Alloys.
MIL-H-10868 - Hose Assembly, Rubber, Utility, Gasoline (1/4-inch Inside Diameter).
MIL-C-10872 - Cap, Flue, 4-inch, Cylindrical.
MIL-A-10957 - Adapter Kit, Gravity Feed, Military Gasoline Can.
MIL-C-11133 - Crate, Wood, Open, Wirebound.
MIL-H-12340 - Heater, Space (Yukon, M-1950, With Accessories).

STANDARDS

FEDERAL

FED-STD-595 - Colors.

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.
MIL-STD-130 - Identification Marking of U.S. Military Property.
MIL-STD-1186 - Cushioning, Anchoring, Bracing, Blocking, and Waterproofing; With Appropriate Test Methods

DRAWINGS

ARMY NATICK LABORATORIES

5-11-944 - Cabinet, Dough Proofing, Portable, Insulated 12-Pan; Assembly Complete.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:15Z
Check the source to verify that this is the current version before use.

5-11-945 - Frame Assembly.
5-11-946 - Door Assemblies.
5-11-947 - Panel Assemblies and Section.
5-11-948 - Tray Assemblies.
5-11-949 - Miscellaneous Details (Sheet A).
5-11-950 - Miscellaneous Details (Sheet B).
5-11-951 - Miscellaneous Details (Sheet C).

(Miniature copies of Drawings 5-11-944 through 5-11-951, identified as figures 1 through 8, respectively are attached for information purposes only.)

(Copies of specifications, standards, drawings and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activtiy or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal, shall apply:

American Society for Testing and Materials (ASTM)

Designation A-276 - Stainless and Heat-Resisting Steel Bars, and Shapes.
Designation A-511 - Seamless Stainless Steel Mechanical Tubing.
Designation D-1056 - Sponge and Expanded Cellular Rubber Products.
Designation D-1565 - Tests for Flexible Foams Made From Polymers or Copolymers or Vinyl Chloride.
Designation D-1621 - Test for Compressive Strength of Rigid Cellular Plastics.
Designation A-167 - Stainless and Heat-Resisting Chromium-Nickel Steel Plate Sheet and Strip.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, Pennsylvania 19103.)

National Motor Freight Traffic Association, Inc., Agent

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Associations, Inc., Tariff Order Section, 1616 P Street, N.W., Washington, DC 20036.)

Source: https://assist.dla.mil -- Downloaded: 2026l0-21T19:15Z
Check the source to verify that this is the currentversion before use.

Uniform Classification Committee, Agent

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606.)

(Technical society and technical association specifications, and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), the supplier shall furnish a sample of the item to be procured under this specification for first article inspection and approval (see 4.3 and 6.3).

3.2 Materials and components. Materials and components shall be as specified herein and on the applicable referenced drawings. Materials not definitely specified shall be of the quality normally used by the manufacturer in his standard commercial dough proofing cabinets provided the completed items comply with all provisions of this specification.

3.2.1 Aluminum.

3.2.1.1 Plate and sheet 5052. Aluminum alloy plate and sheets 5052 shall conform to temper H32 of QQ-A-250/8.

3.2.1.2 Bar, rods and shapes, 6061. Aluminum alloy bars, rods, and shapes 6061, shall conform to temper T6 of QQ-A-225/8.

3.2.1.3 Bars, rods and shapes, 6062. Aluminum alloy bar, rods, and shapes 6062, shall conform to temper T6 of QQ-A-200/8.

3.2.1.4 Extrusions, 6063. Aluminum alloy extrusions 6063, shall conform to temper T5 of QQ-A-200/9.

3.2.2 Steel, carbon.

3.2.2.1 Sheet or strip. Carbon steel sheet or strip steel shall be cold rolled, commercial quality (CRCO) conforming to QQ-S-698.

3.2.2.2 Plate. Carbon steel plate shall conform to QQ-S-635.

3.2.2.3 Bar stock. Carbon steel bar stock shall be cold drawn conforming to QQ-S-634.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:15Z
Check the source to verify that this is the current version before use.

3.2.2.4 Tubing. Carbon steel tubing shall be seamless, condition CD MT 1020 of QQ-T-830.

3.2.2.5 Wire. Carbon steel wire shall conform to QQ-W-470.

3.2.3 Stainless and corrosion-resisting steel.

3.2.3.1 Plate and sheet. Stainless steel plate and sheet unless otherwise specified herein shall conform to classes 302 or 304 of ASTM A-167.

3.2.3.2 Bar. Stainless steel bar shall conform to ASTM A-276.

3.2.3.3 Tube. Stainless steel tube shall conform to composition MT 304 or MT 316 of ASTM A-511.

3.2.4 Hooks. Hooks shall conform to type XII, class 2, size B of MIL-H-639.

3.2.5 Sponge rubber. The sponge rubber shall conform to SCO-12 of ASTM D-1056.

3.2.6 Rubber gasket. Rubber gasket material used in the thermometer assembly shall conform to class B of HH-G-156.

3.2.7 Insulation. The insulation shall be expanded closed cell rubber hardboard conforming to the requirements listed below:

		(ASTM Designation)
Water absorption percent, maximum	10	D-1056
Density, (pounds per cubic foot)	5 ± 1	D-1565
Compressive strength, (pounds per square inch) (p.s.i.) minimum	40	D-1621

3.2.8 Adhesive. Adhesive for cementing the rubber insulating cores to the metal panels shall conform to type I of MMM-A-1617.

3.2.9 Glazing putty. Standard commercial glazing putty shall be used on panels and joints as specified on Drawing 5-11-944.

3.2.10 Sealing compound. Sealing compound shall be commercial type, non-toxic, translucent, nontinted silicone rubber and shall have no adverse effect on the health of personnel. Questions pertinent to this effect shall be referred by the procuring activity to the appropriate departmental medical service who will act as an advisor to the procuring agency (see 4.5).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:15Z
Check the source to verify that this is the current version before use.

3.2.11 Silver solder. Silver solder shall conform to grade V of QQ-B-654.

3.2.12 Primer. Primer shall conform t· TT-P-1757.

3.2.13 Enamel. The enamel shall conforr to TT-E-529. The color shall be olive drab conforming to Number X24087 of FED-STD-595.

3.2.14 Fasteners. Fasteners used in assembling various parts of the dough proofing cabinet, shall be commercial, of the material, kind, and size, specified on the drawings, and if required to be zinc plated shall be plated as specified in 3.6.3.1.

3.2.15 Chain, twist link. The twist link chains used in the chain assembly shall be welded steel electrogalvanized conforming to type I, grade C, class 5 of RR-C-271.

3.2.16 Alternate components. Components offered as equivalent to components specified hereinafter and on the referenced drawings as specified manufacturer's part number or equal shall be functionally equal, of equal or better quality, with the manufacturer's part number identified. The incorporation and inclusion of such a component in the design of the specified end product shall not require modification or change to any other specified component, and shall not reduce ease of maintenance to it or any other components, unless such modification or change is specifically approved by the contracting officer. Prior to the manufacture of the first article, or if none is required, prior to commencing production, the contractor shall submit for the contracting officers approval a list identifying each proposed alternate component, together with proof that each listed component complies with requirements specified herein. The contracting officer, at his option, may require a physical sample of the proposed substitution. Approval of the submitted listing, together with necessary supporting data, authorizes the commencement of the first article or production manufacture, as applicable but does not relieve the contractor of the responsibility that these components perform in accordance with specified requirements when incorporated into the end product.

3.3 Design and construction. The designed construction of all components and assemblies of the dough proofing cabinet shall be in accordance with the requirements of Drawings 5-11-944 through 5-11-951 and as specified herein. Insulation shall contact all edges. Door gaskets shall be fabricated of sponge rubber specified in 3.2.5. Adhesive for cementing the gasket to the door metal shall be as specified in 3.2.8. When tested as specified in 4.6.1, the dough proofing cabinet shall be capable of maintaining 80 to 100 percent relative humidity with a cabinet temperature of 90 to 100 degrees Fahrenheit (F). and all doors, locking devices and controls shall operate without use of undue force and evidence of failure.

Source: https://assist.dla.mil -- Downloaded: 202610-21T19:15Z
Check the source to verify that this is the currentversion before use.

3.4 Marking for identification. Marking for identification shall be in accordance with MIL-STD-130. The marking shall be on plate of material specified in 3.2.3.1 with the letters "US" in characters 2 inches high. The name plate shall be attached to the outside right or left front panel.

3.5 Instruction plate. Each dough proofing cabinet shall be provided with an instruction plate fabricated of stainless steel specified in 3.2.3.1. The plate shall be located adjacent to the identification marking plate (see 3.4). The plate shall contain the following information, etched, embossed or die stamped thereon in legible characters. The words "CABINET, DOUGH PROOFING, PORTABLE, INSULATED, 12-PAN CAPACITY" shall be in characters not less than 3/16 inch high. The "OPERATING INSTRUCTIONS" shall be in characters not less than 1/8 inch high. All other characters shall be not less than 3/32 inch high.

CABINET, DOUGH PROOFING, PORTABLE, INSULATED, 12-PAN CAPACITY

OPERATING INSTRUCTIONS

1. Doors must be closed.
2. Open fuel supply to radiator burner. Ignite burner and adjust flow of fuel to maintain temperature of 90° to 100°F.
3. Open fuel supply to steam coil burner. Ignite burner and adjust flow of water to steam coil to maintain highest degree of relative humidity.
4. If necessary, readjust burners to comply with above requirements.
5. If necessary, adjust top cover to allow excess heat and humidity to escape, but close immediately when this has been accomplished to prevent dust and dirt from entering the cabinet.

3.6 Finish.

3.6.1 Primer. All exposed outside metal surfaces of the dough proofing cabinet shall be cleaned in accordance with MIL-C-5541 and then given a coat of metal primer conforming to 3.2.12. The dry film thickness of primer shall be 0.6 to 1.0 mils.

3.6.2 Finish coat. After primer is dry, one coat of enamel conforming to 3.2.13 shall be applied. The combined dry film thickness of primer and enamel shall be 1.2 to 2.0 mils. The enamel shall level out to produce a smooth and uniform film without orange peel effect, wrinkles, drops or streaks.

3.6.3 Zinc plating. All fasteners and other parts so specified on applicable drawings shall be zinc plated in accordance with type II, class 2 of QQ-Z-325.

3.7 Government furnished property. The following items in the quantities indicated will be furnished by the Government (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:15Z
Check the source to verify that this is the current version before use.

Item No.	Description	Item (part) number Drawing 5-9-944 and 5-9-949	Quantity
1	Adapter kit, gravity feed, Military gasoline can.	MIL-A-10957	1
2	Cap, flue, 4-inch cylindrical.	32	2
3	Burner.	15-1	2
4	Pipe, air-conditioning, heating, 4-inch diameter.	30	8
5	Elbow, air-conditioning, heating, nonadjustable, 4-inch diameter.	31	1
6	Hose assembly, 6-foot length.	15-2	3
7	Hose assembly, 12-foot length.	15-5	1

3.8 Workmanship. All components and assemblies of the dough proofing cabinet shall be free from dirt and other harmful extraneous material, burrs, slivers, rough die, tool and grind marks, dents and cracks. Castings, molded parts and stampings, if used, shall be free of sand, fins, pits, blow holes and sprues. External surfaces shall be free of sharp edges and corners, except when corners are required.

3.8.1 Metal fabrication. Metal used in the fabrication of the dough proofing cabinets shall provide for original quality surface finish and shall be free from kinks and unspecified bends. Forming and shearing shall not cause damage to the metal and shall be done neatly and accurately. Corners shall be square and true and all bends of a major nature shall be made with dies or fixtures to assure uniformity of size and shape.

3.8.2 Welding and brazing. The surfaces of parts to be welded or brazed shall be free from rust, scale, paint, grease and other foreign matter. Welds and brazes shall be smooth and free of cracks, burn holes, undercut or incompleted fusion. All scale and flux shall be removed from finished welded or brazed areas.

3.8.3 Soldering. Joints to be soldered shall be completely filled and wiped smooth after soldering. No flux shall remain on the joint or surrounding area after soldering is completed.

3.8.4 Fastening devices. Threaded fastener and rivet holes shall be accurately punched or drilled and shall have burrs removed. Threaded fasteners shall not be broken, cracked or stripped and shall be securely torqued. Rivets shall fill the holes completely and the heads and peened ends shall be in full contact with the surfaces of the joined members.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:15Z
Check the source to verify that this is the current version before use.

3.8.5 Putty, adhesive and sealing compound. Preparation and application of putty adhesive and sealing compound shall be done in a uniform manner.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3).
2. Quality conformance inspection (see 4.4).

4.3 First article inspection. When a first article is required, it shall be examined for defects in table I, dimensions specified, and tested as specified in 4.6.1. The presence of any defect or of any dimension specified requirement or the failure of any test shall be cause for rejection of the first article.

4.4 Quality conformance inspection. Except as otherwise specified herein, sampling for inspection shall be performed in accordance with the provisions set forth in MIL-STD-105.

4.4.1 Components and material inspection. In accordance with 4.1 above, components and material shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

4.4.1.1 Insulation. The insulation shall be tested for water absorption, in accordance with ASTM D-1056, density in accordance with ASTM D-1565, and compressive strength in accordance with ASTM D-1621 to determine compliance with the requirement of 3.2.7. All tests shall be performed on each sample unit. The lot size shall be the number of square feet of insulation offered for inspection at one time. The sample unit shall be three square feet of insulation. The inspection level shall be S-1. Any nonconformance with specified requirements shall be cause for rejection of the lot.

4.4.2 In-process inspection. Examination shall be made of the following fabrication processes to establish conformance with specified requirements. Whenever non-conformance is noted, correction shall be made to the affected items and process:

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:15Z
Check the source to verify that this is the current version before use.

a. Application of the insulation as specified on the drawings and as specified in 3.2.7
b. Cleaning of the metal and application of primer specified in 3.6.1
c. Primer is dry prior to application of enamel finish coat specified in 3.6.2
d. Welding or brazing which cannot be examined after complete assembly of the item is accomplished as specified on Drawing 5-11-948 and Drawing 5-11-949, as specified in 3.8.2
e. Sealing of panel joints as specified on Drawing 5-11-944

4.4.3 End item inspection. The inspection lot shall be all dough proofing cabinets offered for inspection at one time.

4.4.3.1 Visual examination. The dough proofing cabinets shall be examined for the defects in table I. The inspection level shall be level II with acceptable quality level (AQL) of 2.5 for major defects and 6.5 for total defects, expressed in terms of defects per hundred units.

TABLE I. Classification of defects

Examine	Defect	Classification Major	Classification Minor
Finish	Not finished where required.	X	
	Finish not continuous, smooth, uniform, wrinkles, streaks, or drops.		X
	Surface coarse, not free from grit, orange peel, runs, wrinkles, or drops.		X
	Thin film (primer shows through).		X
Construction and workmanship	Part missing or not specified type or size.	X	
	Fractured, split, punctured, dented, deteriorated, bowed, malformed, or out of shape.	X	
	Sharp burrs, sliver or splinter.	X	
	Any part not securely attached.	X	
Doors	Doors when opened and closed bind.	X	
	Locking device does not operate.		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:15Z
Check the source to verify that this is the current version before use.

TABLE I. Classification of defects (cont'd)

Examine	Defect	Classification Major	Minor
Hinges	Hinges not plain and continuous.	X	
Welding and brazing (when applicable)	Not type specified.	X	
	Missing, incomplete, burn holes, cracks, fractured or not fused, slag inclusion, undercut, not smooth and uniform. Scale or flux deposits not removed.	X	
Solder (when applicable)	Not clean surfaces, not smooth, scale or flux deposits not removed, or pin holes in the solder.	X	
Sealing compound (when applicable)	Missing not adherent, or incomplete.	X	
	Not type specified.	X	
Rivets	Missing not type specified.	X	
	Rivets not ground flush when required.		X
	Not sufficiently peened, not drawn tight, excessively peened.		X
Threads	Missing, broken, stripped or fractured.	X	
Thread fasteners	Missing, loose, or broken.	X	
Gages and instruments	Not mounted in specified manner.		X
	Graduations not legible.	X	
Instruction plate	Missing, incomplete, illegible.	X	
Marking identification	Omitted, missing, incomplete, illegible, or not in proper location.	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:15Z
Check the source to verify that this is the current version before use.

4.4.3.2 Dimensional examination. The dough proofing cabinets shall be examined for compliance with dimensions specified. Any dimension not within the specification tolerance shall be a defect. The inspection level shall be S-2 with an AQL of 4.0 defects expressed in terms of defects per hundred units.

4.4.3.3 End item testing. When a first article is not required, the first produced dough proofing cabinet shall be tested as specified in 4.6.1. Each sample dough proofing cabinet shall be tested as specified in 4.6.1. The inspection level shall be S-2. Failure of the test shall be cause for rejection of the first article, first produced item or the sample unit and lot as applicable.

4.4.4 Inspection of preparation for delivery. An inspection shall be made to determine that packaging, packing and marking as required by section 5 of this specification are complied with. Defects shall be as indicated in table II. The sample unit shall be one shipping container fully prepared for delivery. The lot shall be the number of containers offered for inspection at one time. The inspection level shall be S-4 with an AQL of 6.5 expressed in terms of defects per hundred units.

TABLE II. Examination of preparation for delivery

Examine	Defect
Marking	Missing; incorrect; illegible; of improper size, location, sequence or method of application.
Preservation	Preservative improperly applied or missing.
Materials	Component missing, damaged or otherwise defective.

4.4.4.1 Examination of shipping containers. When shipping containers are required to be in accordance with PPP-B-601, PPP-B-621 or MIL-C-11133, examination for defects in closure and strapping shall be in accordance with the applicable container specification. Examination for defects in blocking, bracing, and waterproofing shall be in accordance with MIL-STD-1186.

4.5 Toxicological data and formulations. The supplier shall furnish the toxicological data and formulations required to evaluate the safety of the sealing compound for its proposed use (see 3.2.10).

4.6 Tests.

4.6.1 Operational test. The dough proofing cabinet shall be operated for four hours with twelve empty bread pans in place. During the operation period

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:15Z
Check the source to verify that this is the current version before use.

all doors, locks, and operating controls shall be operated to determine compliance with the operational requirements of 3.3. The temperature and relative humidity shall be measured using a Hygrothermoph instrument (Bendix Aviation Corporation No. 160 or equal) to determine compliance with the temperature and relative humidity requirements of 3.3.1. Any nonconformance with specified requirements shall constitute failure of this test.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging. Preservation and packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A.

5.1.1.1 Disassembly. All exterior components of the cabinet, except the lifting handles, steam inlet elbow, retainer, and other permanently attached protruding parts, shall be removed from the cabinet. The heating pipes and heat shields shall be disassembled. The burner assemblies shall be removed from the combustion chamber and the hoses disconnected from the valve assembly and the gravity feed adapter kit. The water hose shall be removed from the water box assembly and the combustion chamber.

5.1.1.2 Preservation. Cleaning, drying, and preservation shall be in accordance with the process, method, and material requirements of MIL-P-116 as hereinafter specified.

5.1.1.2.1 Draining, cleaning, and drying. Each complete cabinet shall be drained of all water and fuel, cleaned according to process C-1, and thoroughly dried prior to application of preservative.

5.1.1.2.2 Application of preservative. All exposed uncoated ferrous metal surfaces of the interior of the cabinet, except corrosion-resisting steel surfaces, shall be coated with type P-14 preservative. The radiator shall be coated internally and externally with type P-14 preservative. Each burner assembly shall be preserved according to method IC-1. Each flue cap shall be preserved in accordance with the level A requirements of MIL-C-10872. The interior of the combustion chambers, and interior and exterior of the heating pipe elbow, and each of the eight heating pipes shall be coated with type P-7 preservative.

5.1.1.3 Painted surfaces. All defective painted surfaces, where paint has been scratched or scraped or otherwise removed, shall be refinished as specified for the original finish.

5.1.1.4 Packaging.

5.1.1.4.1 Heating pipe. Eight lengths of heating pipe, preserved as specified in 5.1.1.2, shall be nested one within another and packaged method IC-1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:15Z
Check the source to verify that this is the current version before use.

5.1.1.4.2 Heating pipe elbow. Each heating pipe elbow, preserved as specified in 5.1.1.2, shall be completely wrapped in barrier material, conforming to type II, grade A of MIL-B-121. The wrap shall be secured with cotton tape or twine or tape conforming to PPP-T-60 or heat sealed when heat sealable barrier material is used.

5.1.1.4.3 Combustion chamber. Each combustion chamber shall have the steam outlet protected with cushioning material or single-face corrugated fiberboard. The chain shall be wrapped and securely taped to the combustion chamber with tape specified in 5.1.1.4.2.

5.1.1.4.4 Gravity feed adapter kit. Each gravity feed adapter kit shall be packaged in accordance with the level A requirements of MIL-A-10957.

5.1.1.4.5 Flue cap. Each flue cap shall be packaged in accordance with the level A requirements of MIL-C-10872.

5.1.1.4.6 Water box. The water hose shall be coiled and wrapped in one thickness of 30-pound kraft paper conforming to UU-P-268, and placed within the water box. The water box shall then be placed in a snug-fitting fiberboard box conforming to style RSC, type CF, variety SW, class domestic of PPP-B-636. Provisions shall be made to protect the attached fittings. The box shall be securely closed in accordance with method II of PPP-B-636.

5.1.1.4.7 Disassembled components. The two burner assemblies, preserved as specified in 5.1.1.2, the fuel hoses, the gravity feed adapter kit, and other disassembled components shall be packaged in a snug-fitting fiberboard box conforming to style RSC, type CF, variety SW, class domestic of PPP-B-636. The box shall be securely closed in accordance with method II of PPP-B-636.

5.1.1.4.8 Heat shields. The two heat shields shall be nested together so that the heating pipe brackets are adjacent to each other and staggered. The two heat shields shall then be securely taped together with tape specified in 5.1.1.4.2.

5.1.1.4.9 Cabinet. Detached components of one complete cabinet shall be placed, cushioned, blocked, and secured within the cabinet in a manner as to prevent movement or damage to the components or to the interior of the cabinet while in transit. Powdered talcum shall be generously applied to the door gaskets, the doors latched, and the latches secured with tape as specified in 5.1.1.4.2. All openings into the unit, except doors, shall be sealed with tape as specified herein. The thermometer shall be covered with cushioning material and secured with tape as specified herein.

5.1.2 Level C. Cabinets shall be preserved and packaged to afford adequate protection against corrosion, deterioration and damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets these requirements.

Source: https://assist.dla.mil -- Downloaded: 202610-21T19:15Z
Check the source to verify that this is the currenversion before use.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A. Each complete cabinet, preserved and packaged as specified in 5.1, shall be packed upright in a cleated plywood or nailed wood shipping container conforming to overseas type, type 3 load of PPP-B-601; or class 2, style 2 or 4, type 3 load of PPP-B-621, respectively. Each cabinet shall be secured with wood blocking and waterproofed in accordance with MIL-STD-1186, in a manner as to provide clearance for the handles and protruding parts. Each shipping container shall be provided with skids in accordance with the applicable container specification, except that skids shall be positioned in alignment with the four pads on the base of the cabinet. Closure and strapping shall be in accordance with the appendix of the applicable container specification.

5.2.2 Level B. Each complete cabinet, preserved, and packaged as specified in 5.1, shall be packed as specified in 5.2.1, except that shipping containers shall conform to type III, grade B of MIL-C-11133 with the outer skids of such width as to extend beyond the inner edge of the four pads on the base of the cabinet; domestic type, style A or B of PPP-B-601; or class 1, style 2 or 4, type 3 load of PPP-B-621.

5.2.3 Level C. Cabinets, preserved and packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination, at the lowest transportation rate for such supplies. Containers shall be in accordance with Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

5.3 Marking. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129. Special handling marking requirements applicable to arrows, and the word "UP", shall apply.

6. NOTES

6.1 Intended use. The dough proofing cabinet covered by this specification is intended for use as a component part of the Bakery Plant, Field Portable, specified in MIL-B-43322, and consisting of 170 components.

6.2 Ordering data. Purchasers should exercise any desired options offered herein, and procurement documents should specify the following:

6.2.1 Procurement requirements.

(a) Title, number, and date of this specification.
(b) When a first article is required (see 3.1, 4.3 and 6.3).
(c) Source of Government furnished property (see 3.7).
(d) Selection of applicable levels of preservation and packaging, and packing (see 5.1 and 5.2).

Source: https://assist.dla.mil -- Downloaded: 202610-21T19:15Z
Check the source to verify that this is the currentversion before use.

6.2.2 Contract data requirements. Any data items to be delivered under any contract for items covered by this specification should be specifically called for in the contract in accordance with the applicable regulations of the procuring activity.

6.3 First article. When a first article is required, it shall be inspected and tested under the appropriate provisions of ASPR 7-104.55. The first article should be a preproduction sample, initial production item or other specific item described under the definition of a first article in the ASPR. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should include specific instructions in all procurement instruments regarding arrangements for inspection and approval of the first article.

6.4 Asterisks are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodians:

Army - GL
Navy - MC
Air Force - 84

Preparing activity:

Army - GL

Project No. 7320-0445


Review activities:

Army - MD
Navy - MS
DSA - GS


User activities:

Navy - YD


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:15Z
Check the source to verify that this is the current version before use.

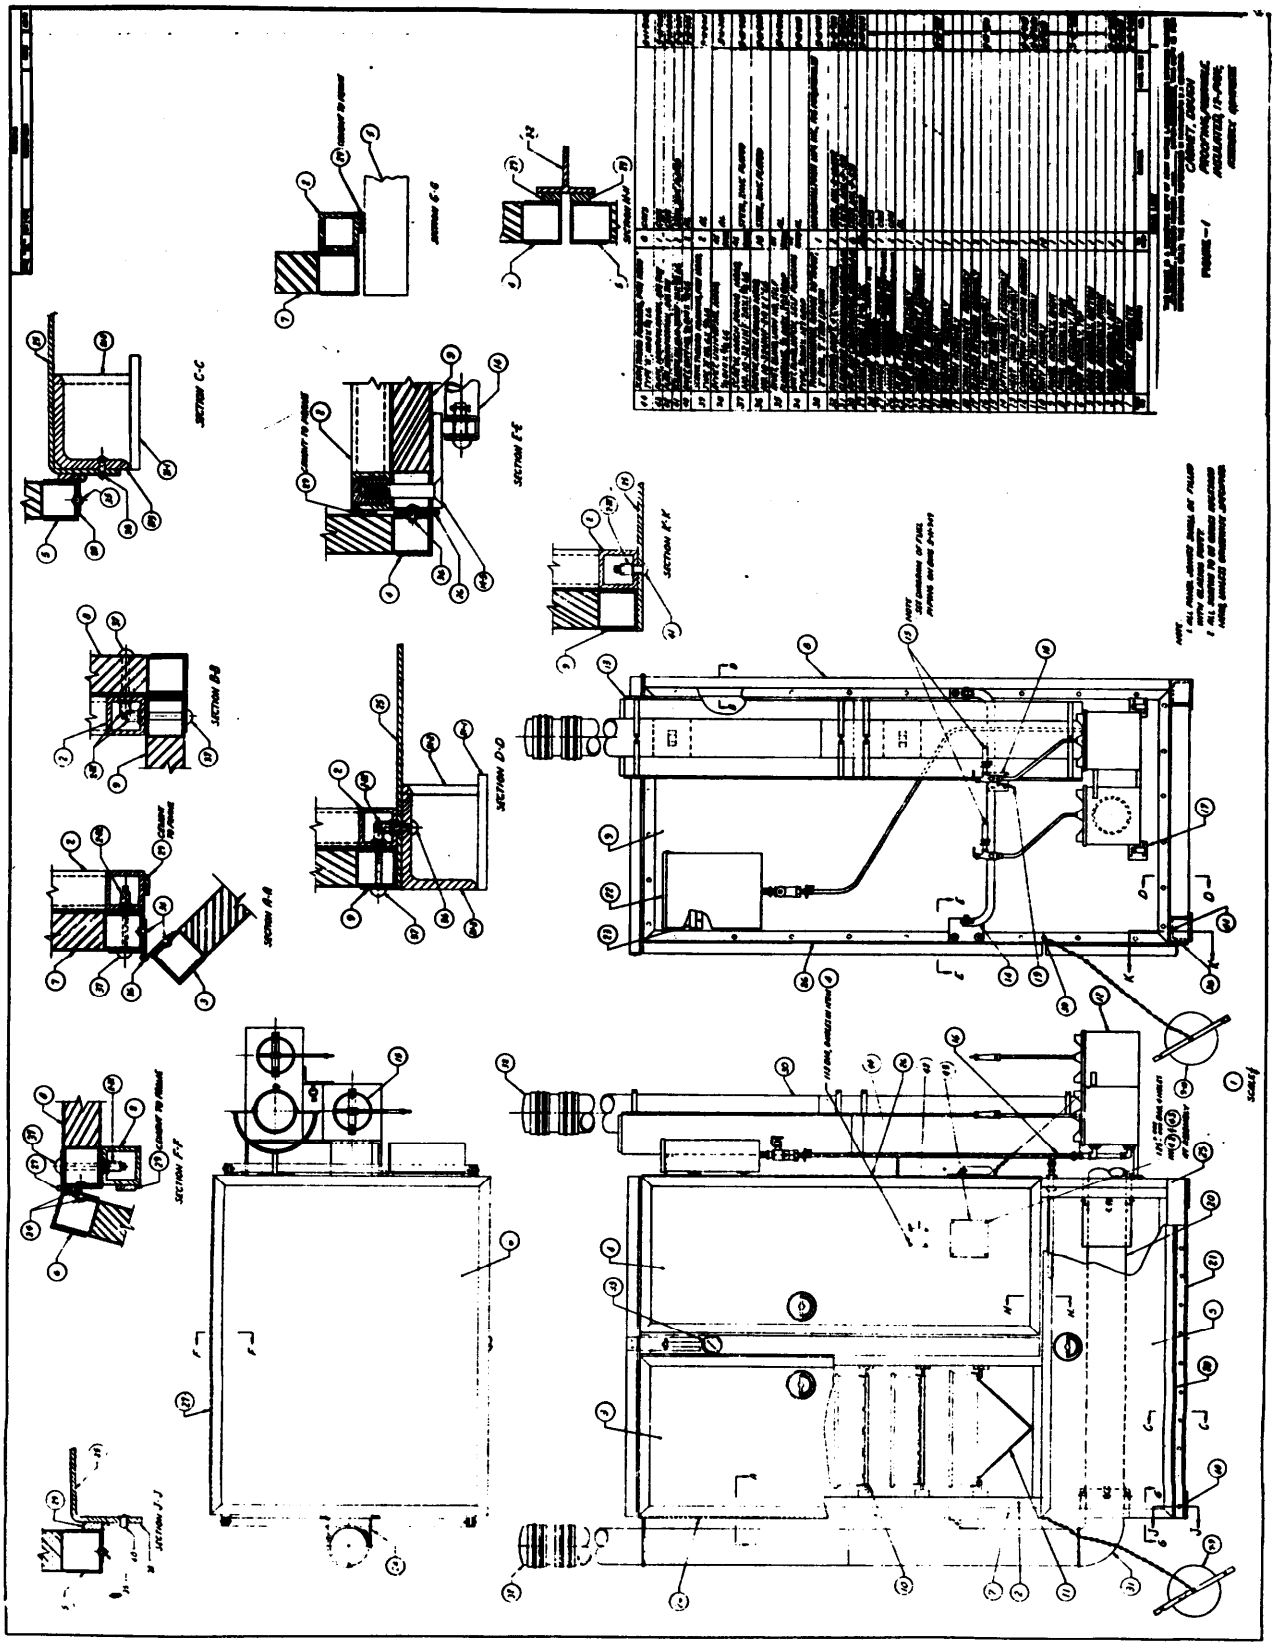


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:15Z
Check the source to verify that this is the current version before use.

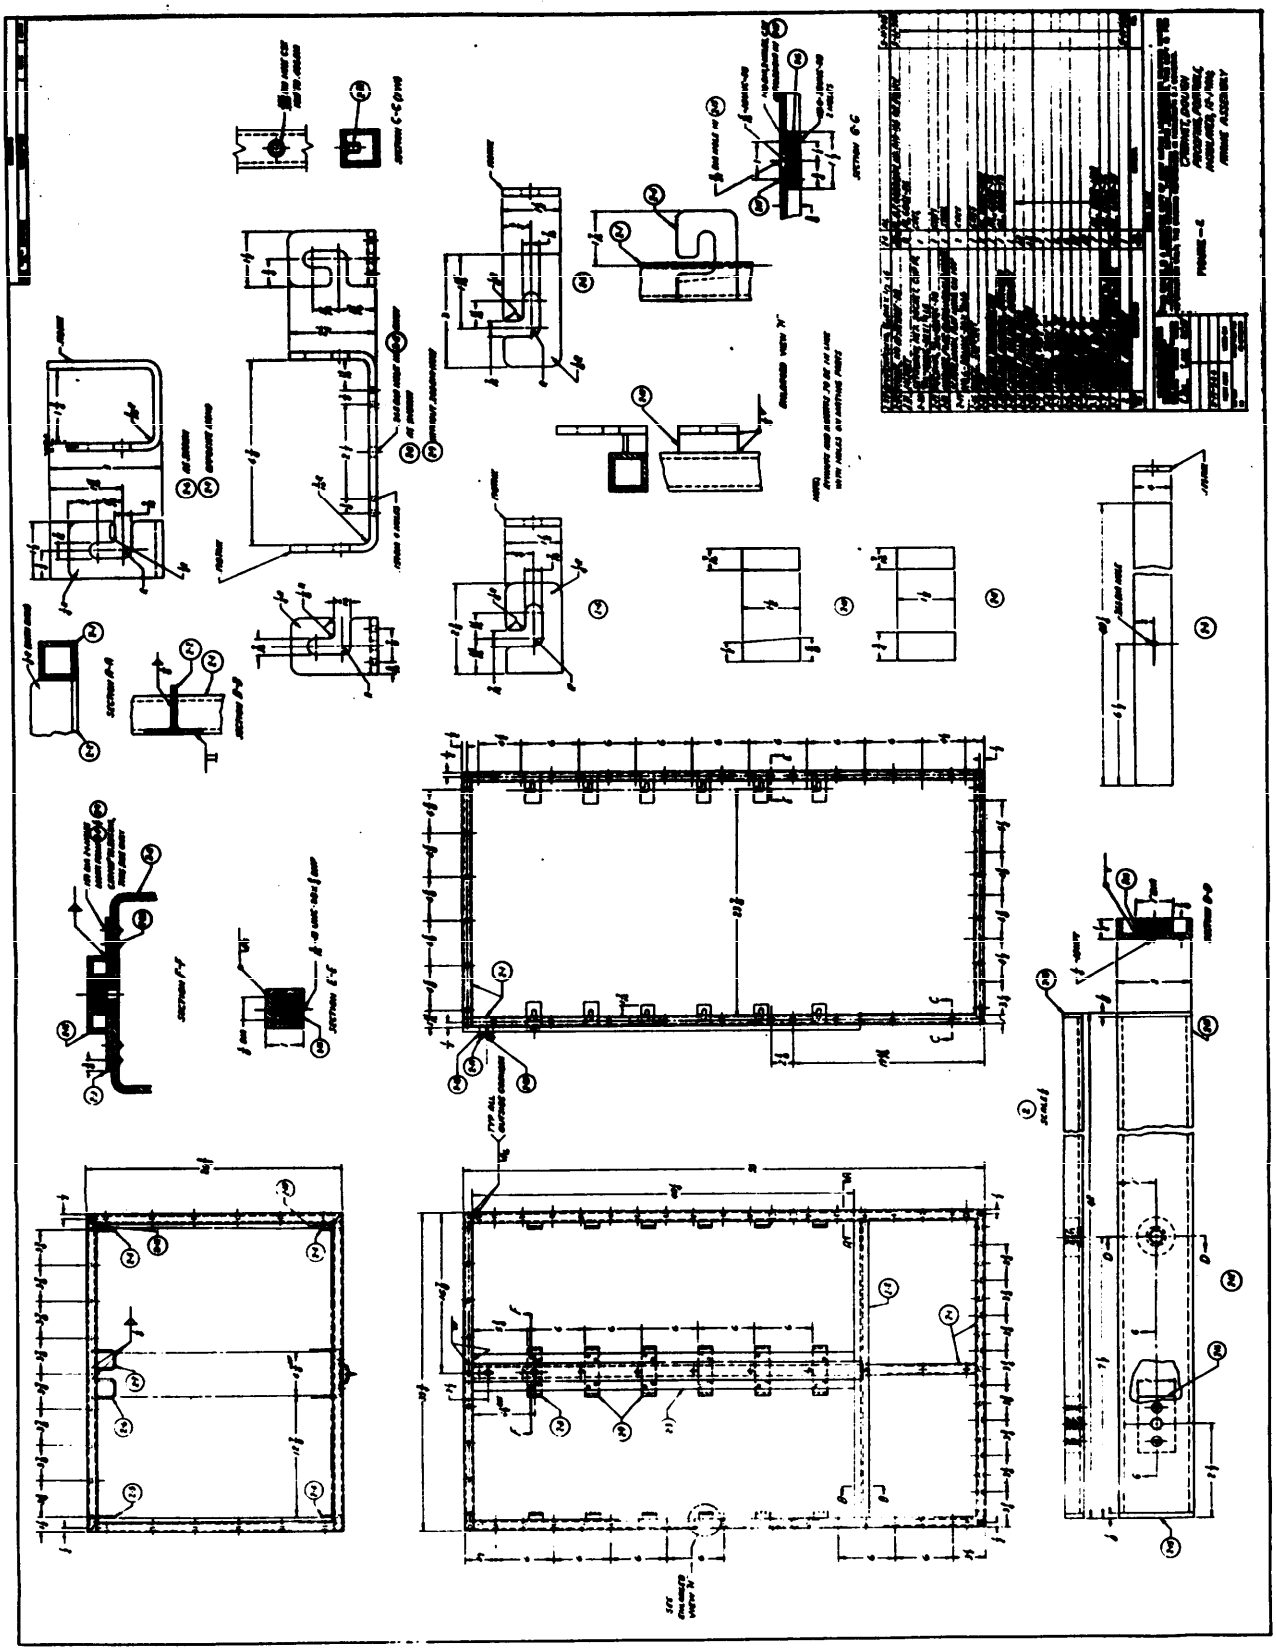


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:15Z
Check the source to verify that this is the current version before use.

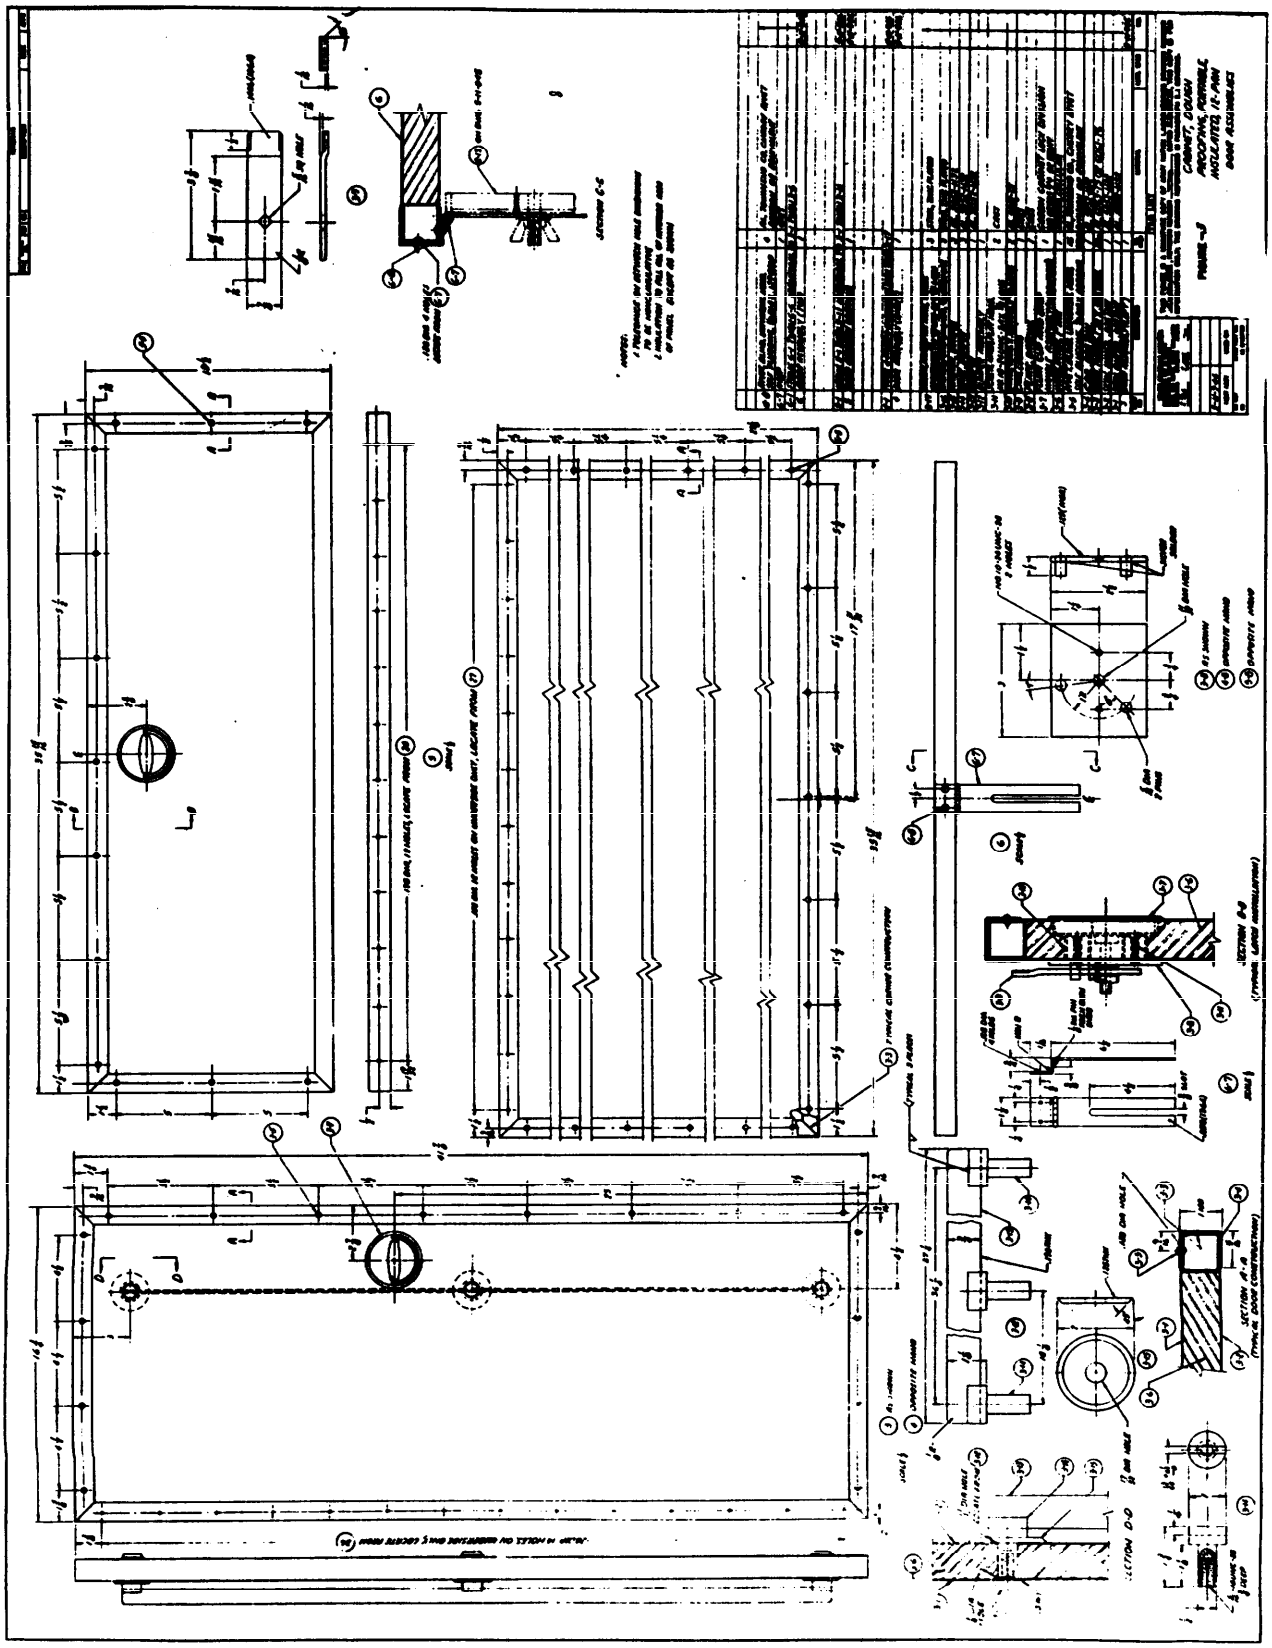


Source: https://assist.dla.mil -- Downloaded: 202610-21T19:15Z
Check the source to verify that this is the current version before use.

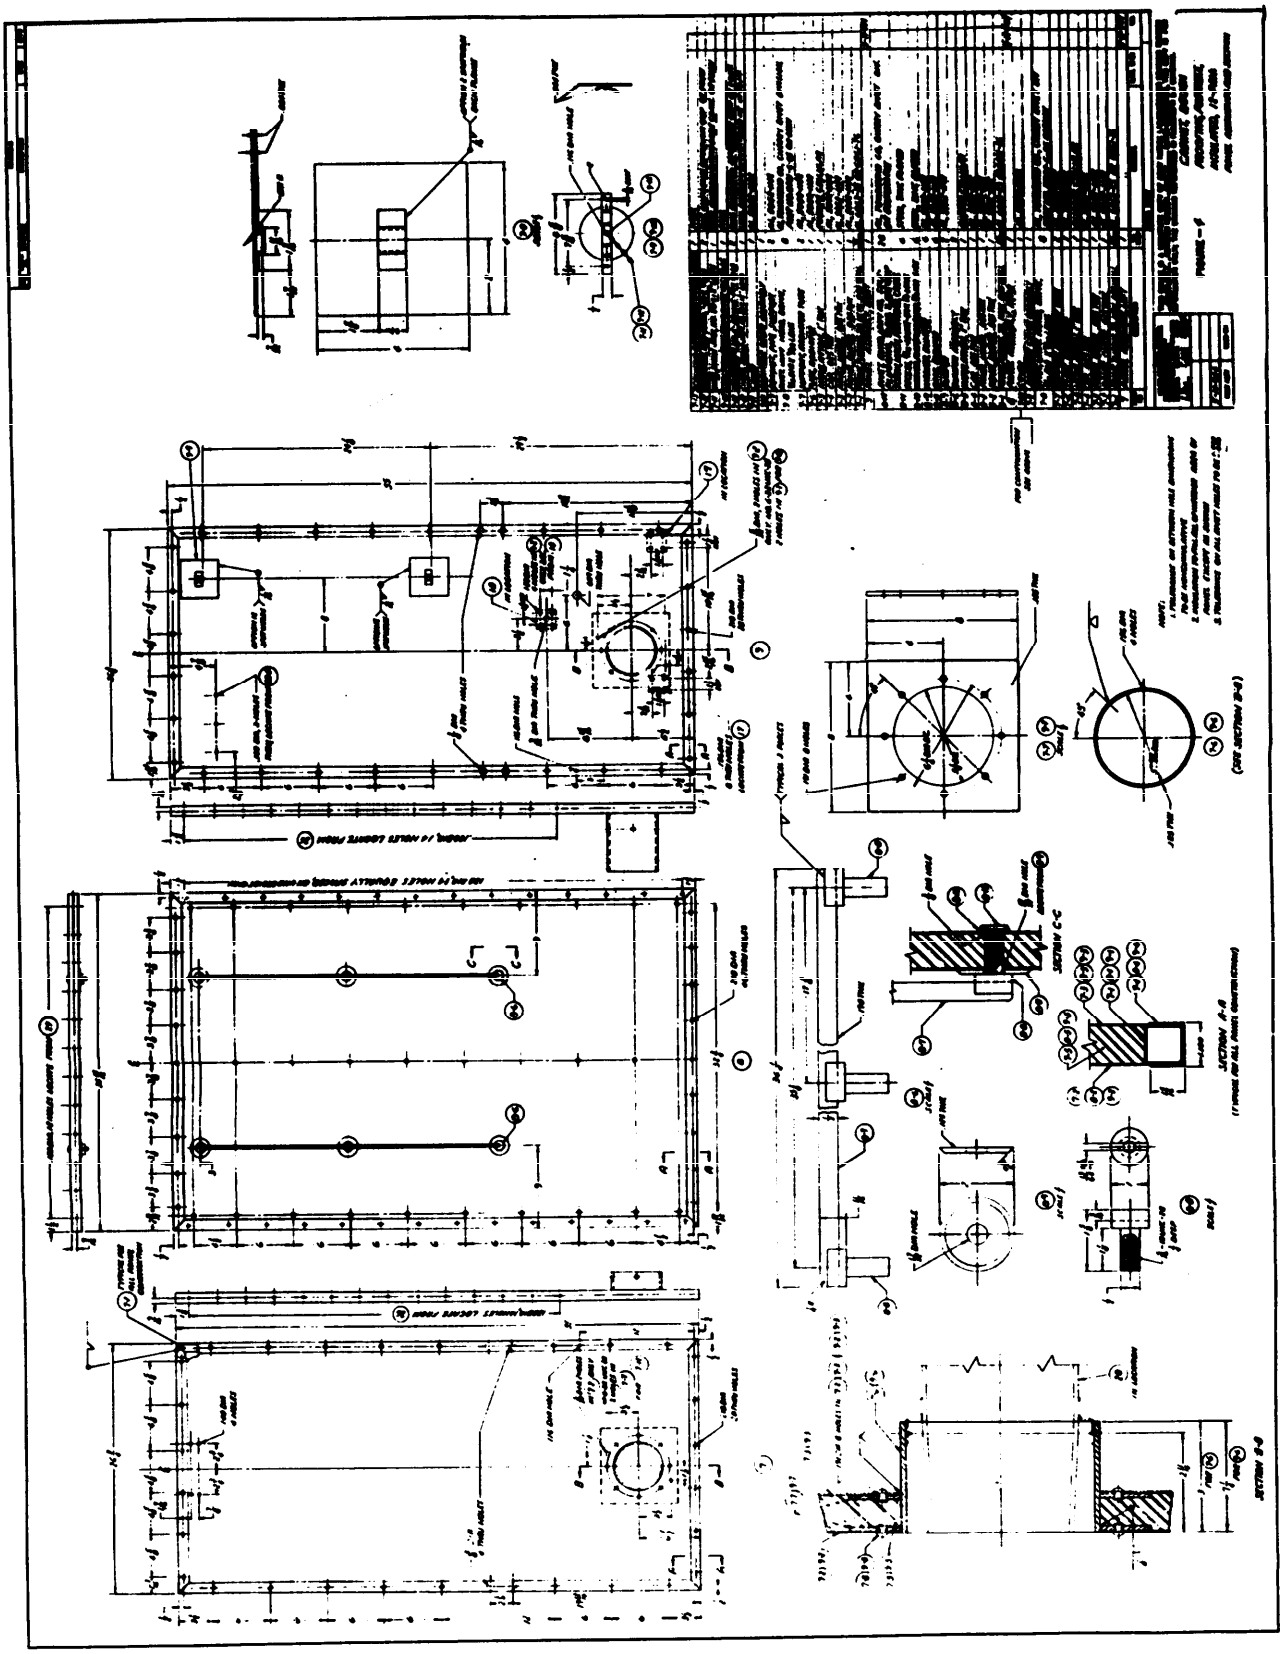


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:15Z
Check the source to verify that this is the current version before use.

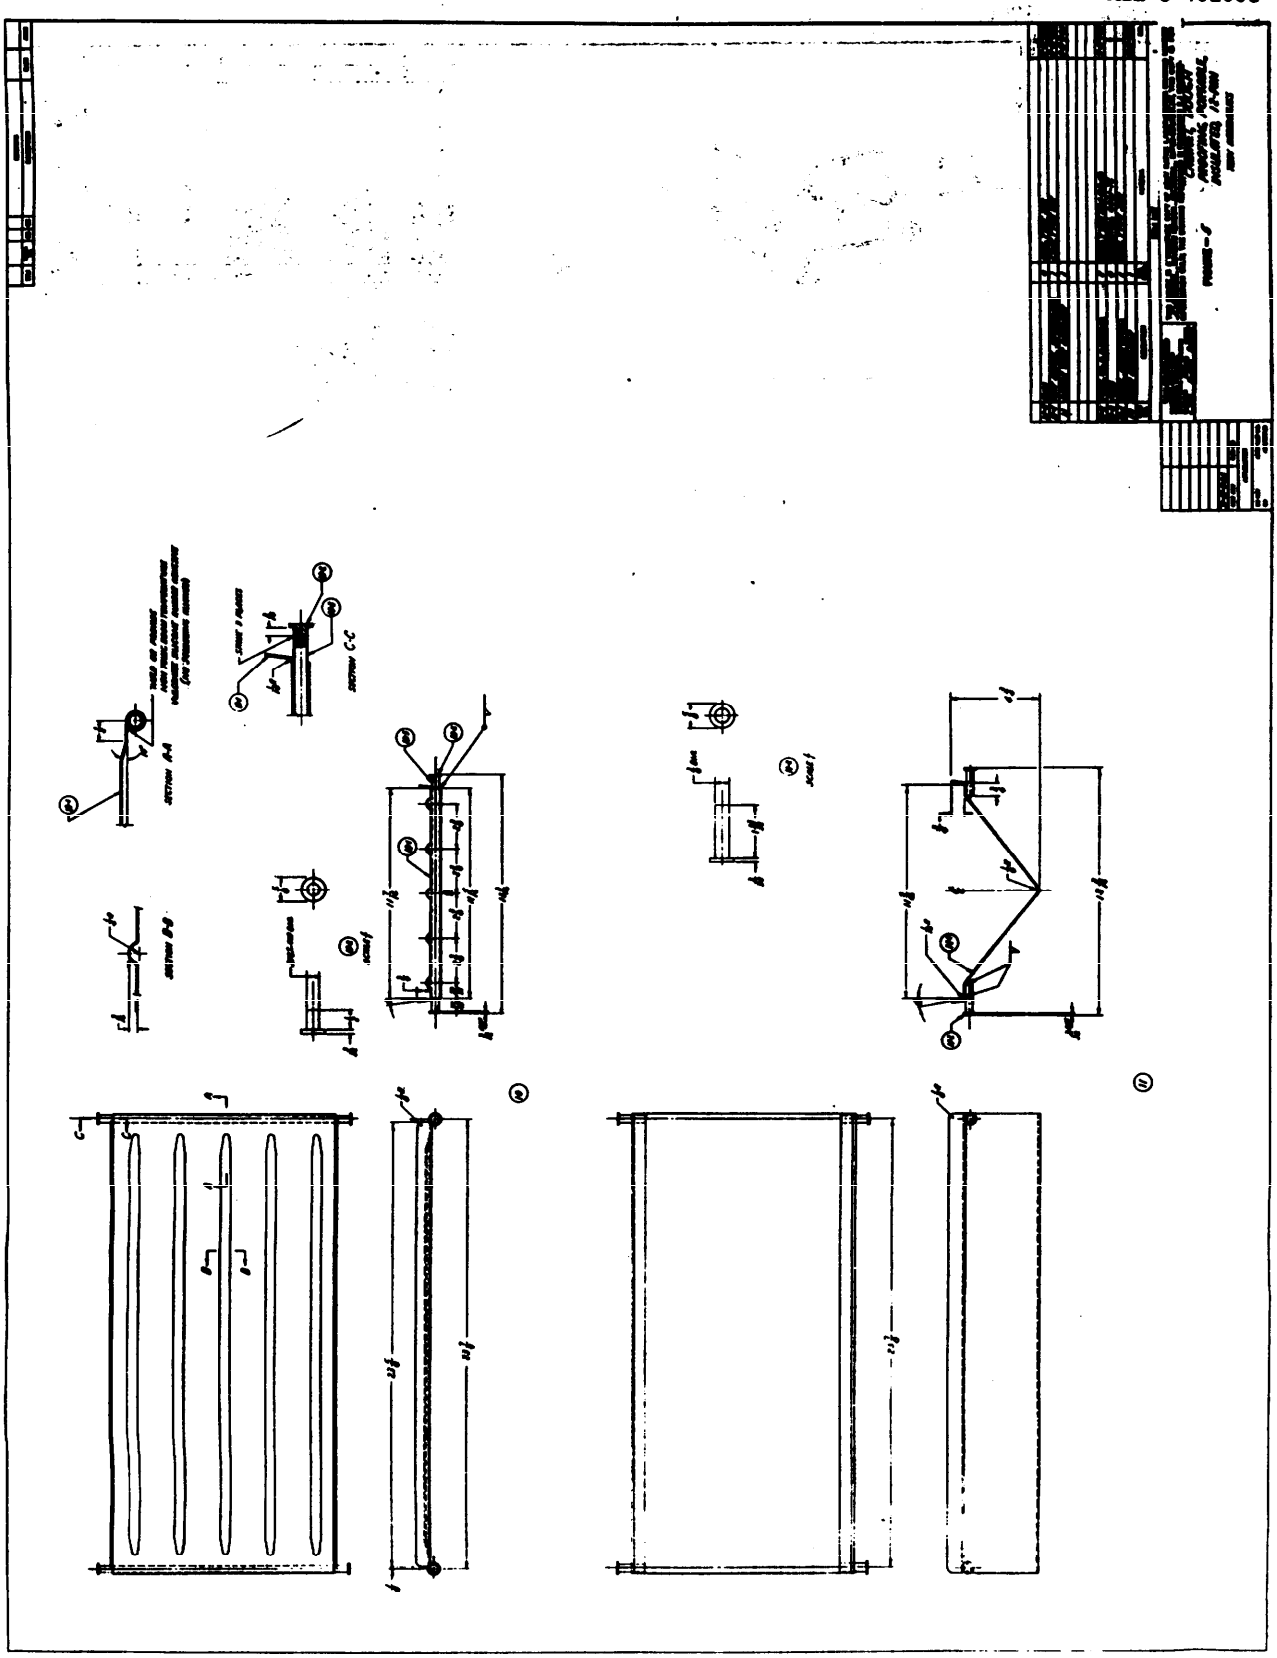


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:15Z
Check the source to verify that this is the current version before use.

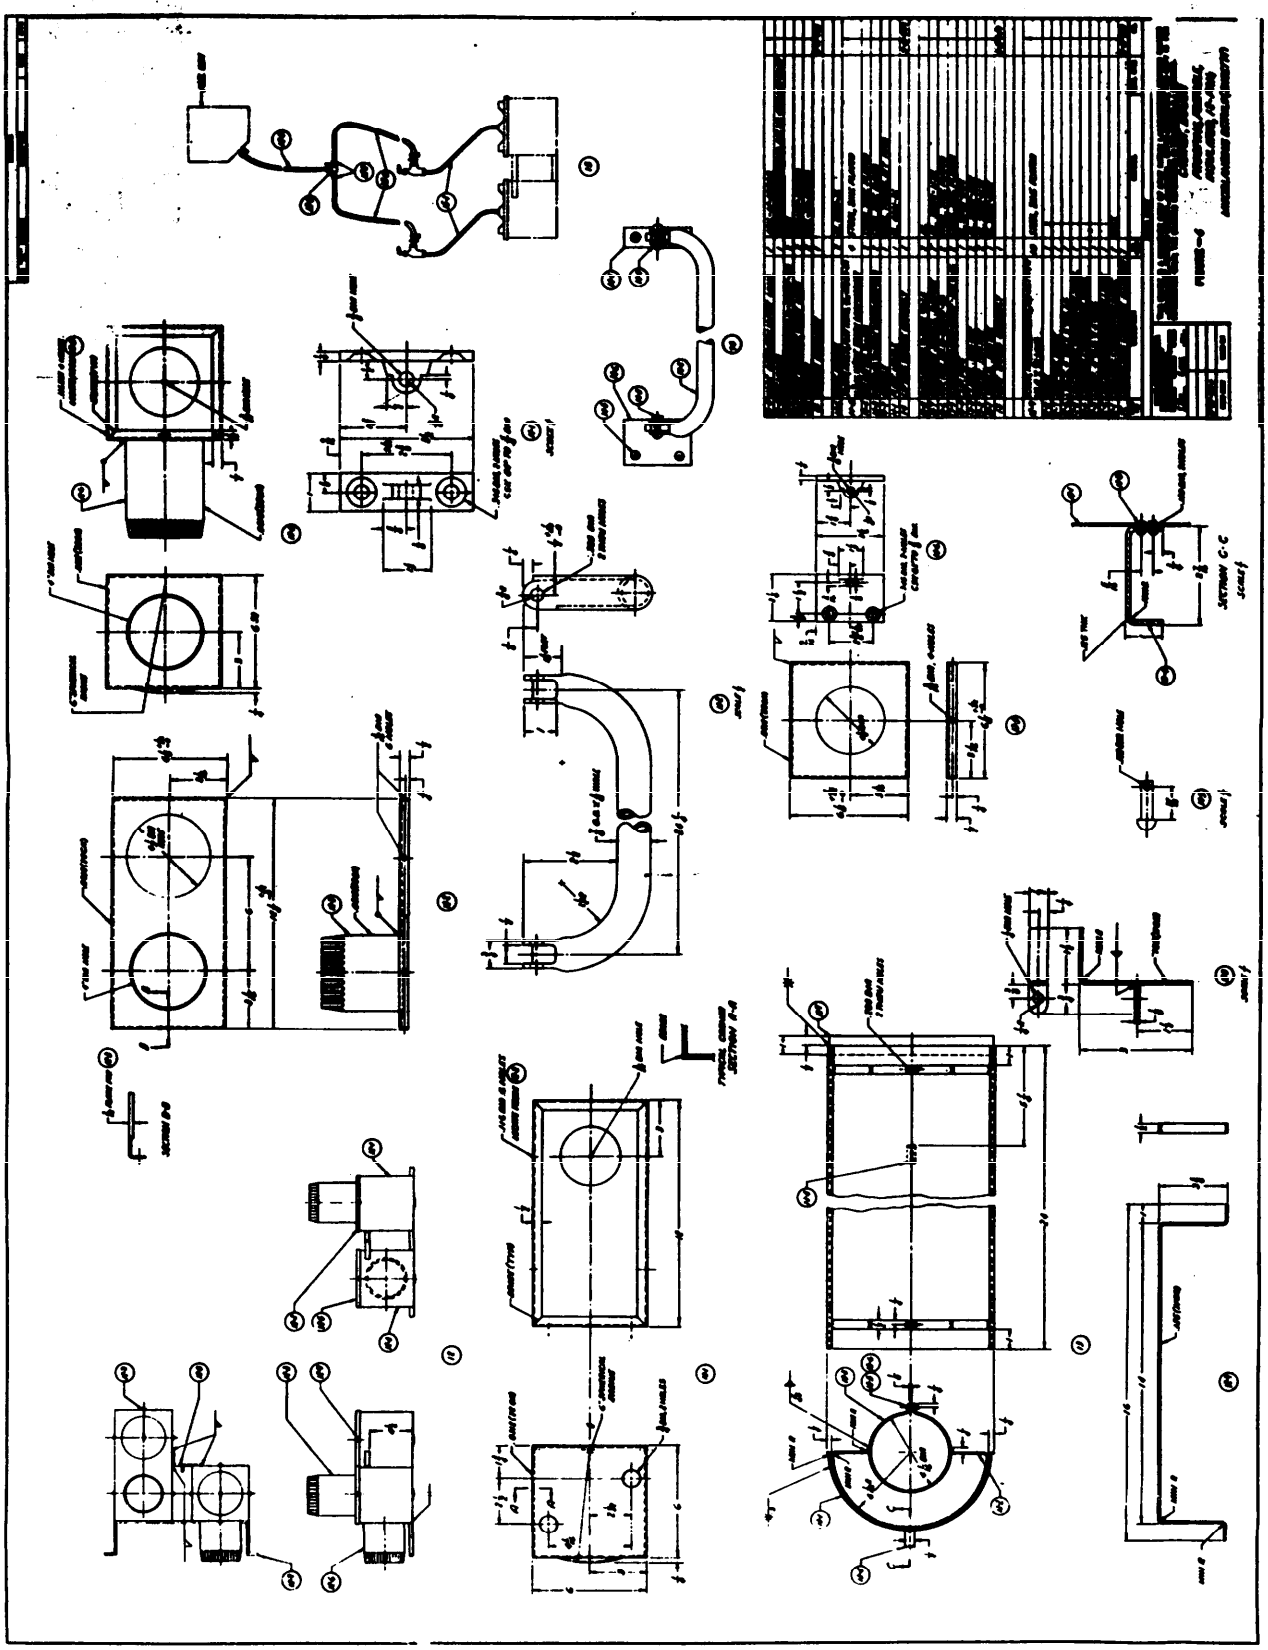

Source: https://assist.dla.mil -- Downloaded: 202610-21T19:15Z
Check the source to verify that this is the current version before use.

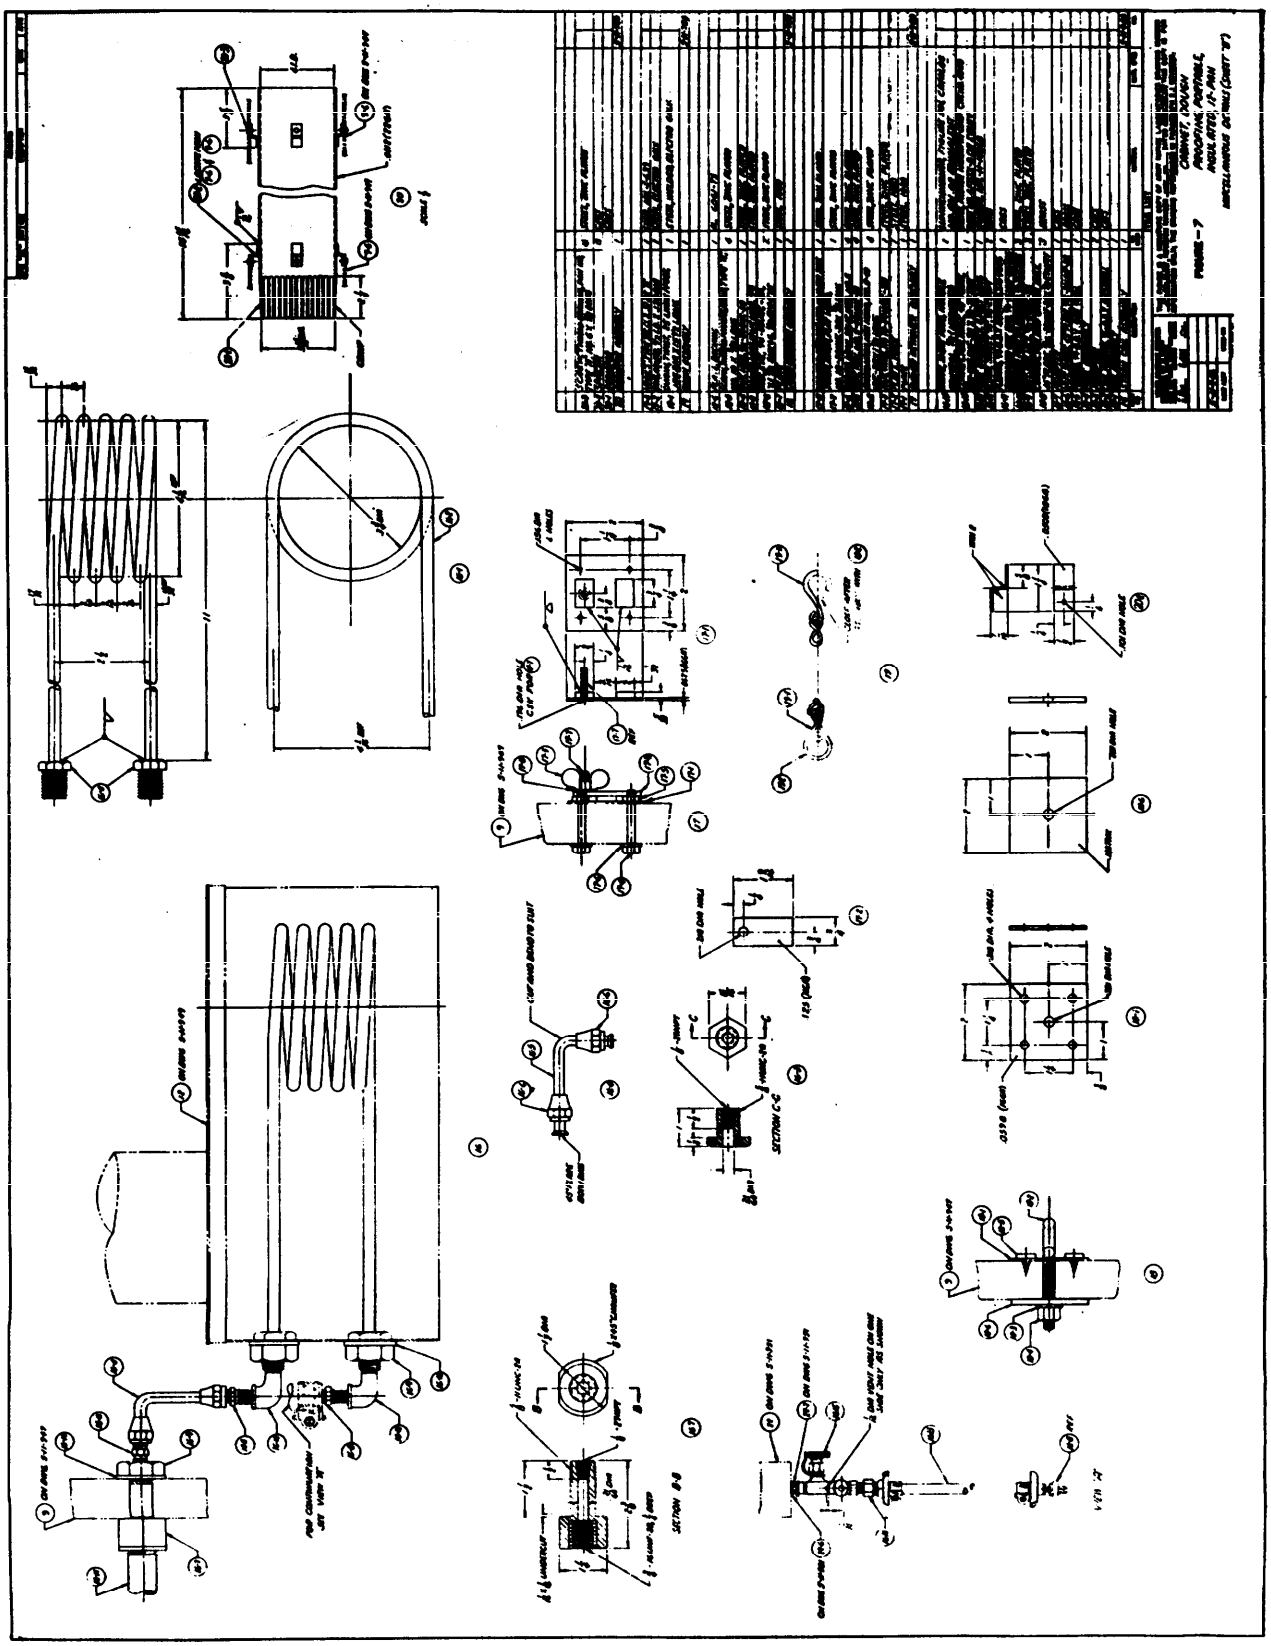

Source: https://assist.dla.mil -- Downloaded: 202610-21T19:15Z
Check the source to verify that this is the current version before use.

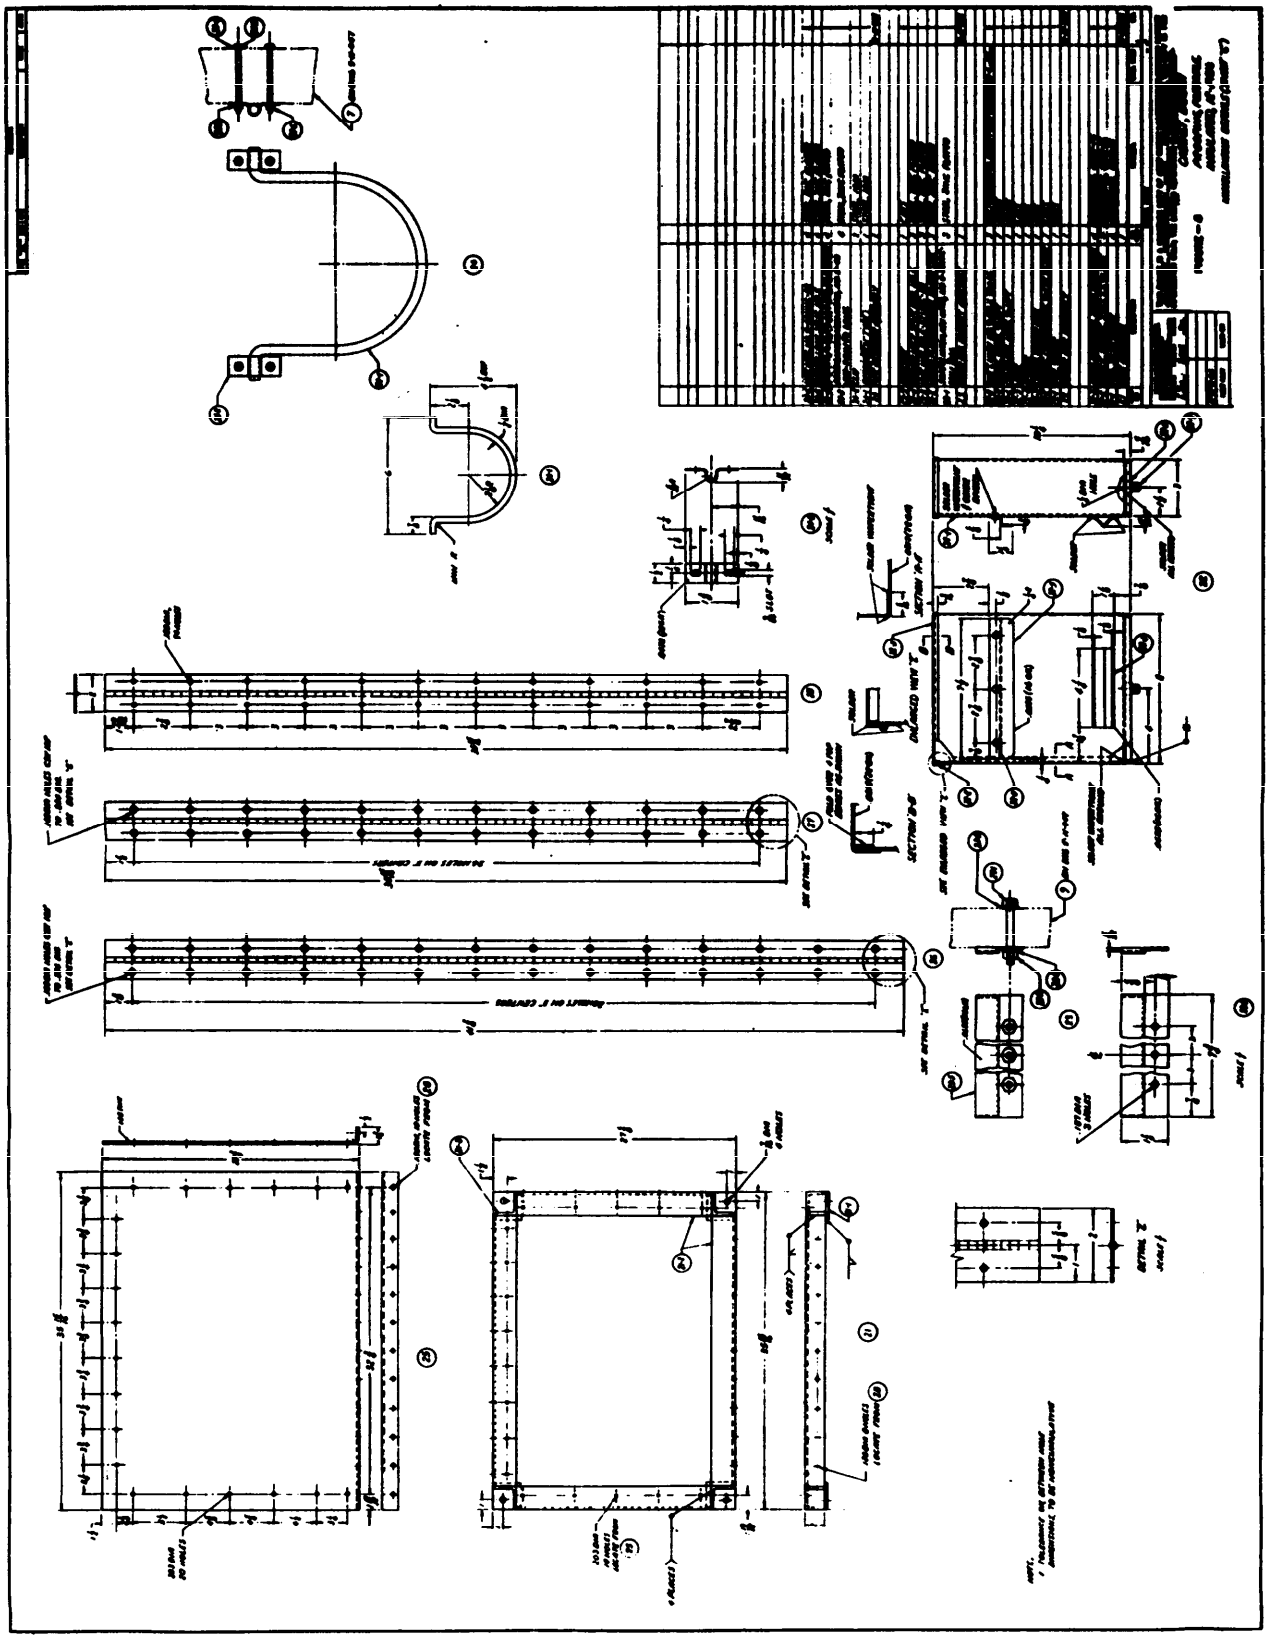

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:15Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

C

Cabinet, Dough Proofing, Portable, Insulated, 12-Pan Capacity MIL-C-40100

NAME OF ORGANIZATION AND ADDRESS	CONTRACT NUMBER
	MATERIAL PROCURED UNDER A [ ] DIRECT GOVERNMENT CONTRACT [ ] SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

[ ] YES [ ] NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*	TELEPHONE NO.
	DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 202640-21T19:15Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
US ARMY NATICK LABORATORIES
NATICK, MA 01760

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

STSNLT-EQS

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314



Commander
US Army Natick Laboratories
ATTN: STSNLT-EQS
Natick, Massachusetts 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 202610-21T19:15Z
Check the source to verify that this is the current version before use.