MIL-C-40115B
26 September 1967
SUPERSEDING
MIL-C-40115A
7 February 1964

MILITARY SPECIFICATION

CUTTER, DOUGHNUT, 3-INCH

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers one type and size doughnut cutter.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

PPP-B-636 - Box, Fiberboard.
PPP-T-45 - Tape, Gummed, Paper, Reinforced and Plain, for Sealing and Securing.

MILITARY

MIL-P-116 - Preservation, Methods Of.
MIL-B-121 - Barrier Material, Greaseproofed, Waterproofed, Flexible.

STANDARDS

FEDERAL

Fed. Std. No. 66 - Steel: Chemical Composition and Hardenability.

MILITARY

MIL-STD-105 - Sampling Procedure and Tables for Inspection by Attributes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:17Z
Check the source to verify that this is the current version before use.

MIL-STD-129 - Marking for Shipment and Storage.
MIL-STD-130 - Identification Marking of U. S. Military Property.

DRAWING

ARMY NATICK LABORATORIES

2-5-36 - Cutter, Doughnut, 3-Inch.

(Note: Miniature copy of Drawing 2-5-36, identified as figure 1, is attached for information purposes only).

(Copies of specifications, standards, and drawings required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer).

2.2 Other publications.- The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated the issue in effect on date of invitation for bids or request for proposal shall apply.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

Standard A 167-63 Corrosion-Resisting Chromium-Nickel Steel Plate, Sheet, and Strip

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, Pennsylvania 19103).

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies).

3. REQUIREMENTS

3.1 Preproduction sample.- When specified (see 6.2), before production is commenced, a sample doughnut cutter shall be submitted or made available to the contracting officer or his authorized representative for approval in accordance with 4.2. The approval of the preproduction sample authorizes the commencement of production but does not relieve the supplier of responsibility for compliance with all applicable provisions of this specification. The preproduction sample shall be manufactured in the same facilities to be used for the manufacture of the production items.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:17Z
Check the source to verify that this is the current version before use.

3.2 Standard product.- The doughnut cutter delivered under this specification shall be the manufacturer's commercial, current, standard product, except for any changes necessary to comply with specification requirements.

3.3 Materials.- The materials shall conform to the requirements specified herein. Commercial tolerances shall apply to metal thickness.

3.3.1 Carbon steel.- Carbon steel shall conform to the chemical composition of AISI number C1015 or 1020 as specified in Fed. Std. No. 66.

3.3.2 Corrosion-resisting plates, sheets, strips.- Corrosion-resisting steel shall conform to any chemical composition of ASTM Standard A 167-63.

3.4 Construction.- The doughnut cutter shall be constructed as specified herein and shall be of the design and size shown on Drawing 2-5-36. The cutter shall be fabricated from a single piece of either of the metals specified in 3.3.1 or 3.3.2.

3.5 Finish.- Carbon steel doughnut cutters shall be nickel plated in accordance with the manufacturer's standard practice prior to sharpening. There shall be no plating on the cutting edge after sharpening. Corrosion-resisting steel cutters shall have a number 2B, or better, finish.

3.6 Marking for identification.- The doughnut cutter shall have the manufacturer's name, trade name, or trademark of such known characters as to be easily identifiable with the manufacturer. Marking shall be in accordance with MIL-STD-130, and shall include the letters U.S.

* 3.7 Workmanship.- Rust, scratches, discolorations, and pits shall be removed. Sharp (except cutting edge) or rough edges, burrs, and slivers shall be removed. The doughnut cutter shall not be split, punctured, dented, or malformed.

* 4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Preproduction sample inspection.- When a preproduction sample is required it shall be examined for defects listed in table I and dimensions specified.

4.3 Component and material inspection.- In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with all the

Source: https://assist.dla.mil -- Downloaded: 202610-21T19:17Z
Check the source to verify that this is the currentversion before use.

requirements of referenced specifications, drawings and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

4.4 Sampling for inspection.- Sampling for inspection shall be performed in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated.

4.5 End item inspection.- The lot shall consist of all doughnut cutters offered for inspection at one time. The sample unit shall be one completely fabricated doughnut cutter.

4.5.1 Visual examination.- Examination shall be made of the doughnut cutter for defects listed in table I. The inspection level shall be II with an acceptable quality level (AQL) of 2.5 for major defects and 6.5 for total defects, expressed in terms of defects per hundred units.

TABLE I.- Classification of visual defects

Examine	Defect	Classification Major	Minor
Finish	Not finished as specified.	X	
	Plating on cutting edge.	X	
	Corrosion-resisting steel cutter not a number 2B or better finish.	X	
Construction and workmanship	Cutter not fabricated from one piece of steel.	X	
	Fractured, split, punctured, dented, or malformed.	X	
	Sharp or rough edges (except cutting edge).	X	
	Rust, scratches, discoloration.		X
	Pits, burrs, or slivers.	X	
Marking for identification	Omitted, illegible, missing, incomplete.		X

4.5.2 Dimensional examination.- Examination shall be of the completed doughnut cutter to determine compliance with dimensional requirements. Any dimension not

Source: https://assist.dla.mil -- Downloaded: 202610-21T19:17Z
Check the source to verify that this is the currentversion before use.

within the specified requirement shall constitute a defect. The inspection level shall be S-2 with an AQL of 4.0 defects, expressed in terms of defects per hundred units.

4.6 Examination of preparation for delivery.- An examination shall be made to determine that preservation and packaging, packing, and marking as required by section 5 of this specification are complied with. Defects shall be scored as specified in table II. The sample unit shall be one shipping container fully prepared for delivery. The lot shall consist of the number of containers offered for delivery at one time. The inspection level shall be S-2 and the AQL shall be 2.5 defects, expressed in terms of defects per hundred units.

TABLE II.- Examination of preparation for delivery

Examine	Defect
Count	More or less than specified quantity of doughnut cutters per container.
Material	Any packaging component or material not as specified; not size specified.
	Component missing, malformed, or damaged.
Workmanship	Doughnut cutter not placed 4 in length, 3 in width and 2 in depth, alternated top to cutting edge in each row (defects applicable to level A packaging only).
	Two layers of doughnut cutters not separated by layer pad of fiberboard as specified (defects applicable to level A packaging only).
Marking (intermediate or shipping container as applicable)	Omitted, incomplete, incorrect, illegible; of improper size, location, sequence, or method of application.

4.6.1 Examination of shipping containers.- When shipping containers are required to be in accordance with PPP-B-636, examination for defects in closure, waterproofing, and strapping shall be in accordance with PPP-B-636.

* 5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging.- Preservation and packaging shall be level A or C as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 202640-21T19:17Z
Check the source to verify that this is the currentversion before use.

5.1.1 Level A.-

5.1.1.1 Preservation.- The unplated cutting edges of each doughnut cutter, with the exception of corrosion-resisting steel cutters, shall be cleaned process C-1, thoroughly dried, and coated with type P-14 preservative of MIL-P-116.

5.1.1.2 Packaging.- Twenty-four doughnut cutters shall be packaged in a snug-fitting fiberboard box conforming to style RSC, type CF, variety optional, class domestic of PPP-B-636. The doughnut cutters shall be placed four in length, three in width, and two in depth alternated top to cutting edge in each row. The two layers shall be separated by a layer pad of the same material as the fiberboard box and cut one-eighth of an inch less than the inside length and width dimensions of the box. Barrier material conforming to type I, grade A, class 2 of MIL-B-121 shall be used to prevent contact of the preserved surfaces of the doughnut cutter with the top and bottom of the fiberboard box and the layer pad. Each box shall be closed with 2-inch minimum width tape conforming to type III, grade B of PPP-T-45 (see 6.3).

5.1.2 Level C.- Doughnut cutters shall be preserved and packaged to afford adequate protection against corrosion, deterioration, and damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice, when it meets these requirements.

5.2 Packing.- Packing shall be level A, B or C as specified (see 6.2).

5.2.1 Level A.- One hundred forty-four doughnut cutters, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC, V3s of PPP-B-636. Level A packages shall be packed on end, two in length and three in width. Each shipping container shall be closed, waterproofed by means of tape, and reinforced with flat strapping or tape banding in accordance with the appendix of PPP-B-636.

5.2.2 Level B.- Unless otherwise specified (see 5.2.2.1), one hundred forty-four doughnut cutters, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC, type CF, variety SW, or type SF, class domestic, grade 200 of PPP-B-636. Level A packages shall be packed on end, 2 in length, and 3 in width. Closure shall be in accordance with method II of the appendix of PPP-B-636.

5.2.2.1 When specified (see 6.2), the shipping container shall be V3c or V3s, fabricated and closed in accordance with PPP-B-636.

5.2.3 Level C.- Doughnut cutters, preserved and packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with rules or regulations of carriers applicable to the mode of transportation.

Source: https://assist.dla.mil -- Downloaded: 202610-21T19:17Z
Check the source to verify that this is the currentversion before use.

5.3 Marking.- In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use.- The doughnut cutter covered by this specification is intended for use in hand cutting doughnuts in messes, field kitchens, and central pastry kitchens and galleys.

6.2 Ordering data.- Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) When preproduction sample is required (see 3.1).
(c) Selection of applicable levels of preservation and packaging and packing (see 5.1 and 5.2).
(d) Whether weather-resistant class fiberboard shipping containers are required for level B shipment (see 5.2.2.1).

* 6.3 Packaging.- The method of packaging referred to in 5.1.1.2 is similar to method III of MIL-P-116.

6.4 The margins of this specification have been marked with an asterisk (*) to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and suppliers are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:

Army - GL
Navy - SA
Air Force - 84

Preparing activity:

Army - GL

Project No. 7330-0223

Review activities:

Army - MD
Navy - SA
Air Force - 84, 85, 45

User activities:

Navy - MC, MS

Review and User information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current Federal Supply Classification Listing of DOD Documents.

Source: https://assist.dla.mil -- Downloaded: 202610-21T19:17Z
Check the source to verify that this is the current version before use.

e National Fire Protection [Application for copies should be addressed to the

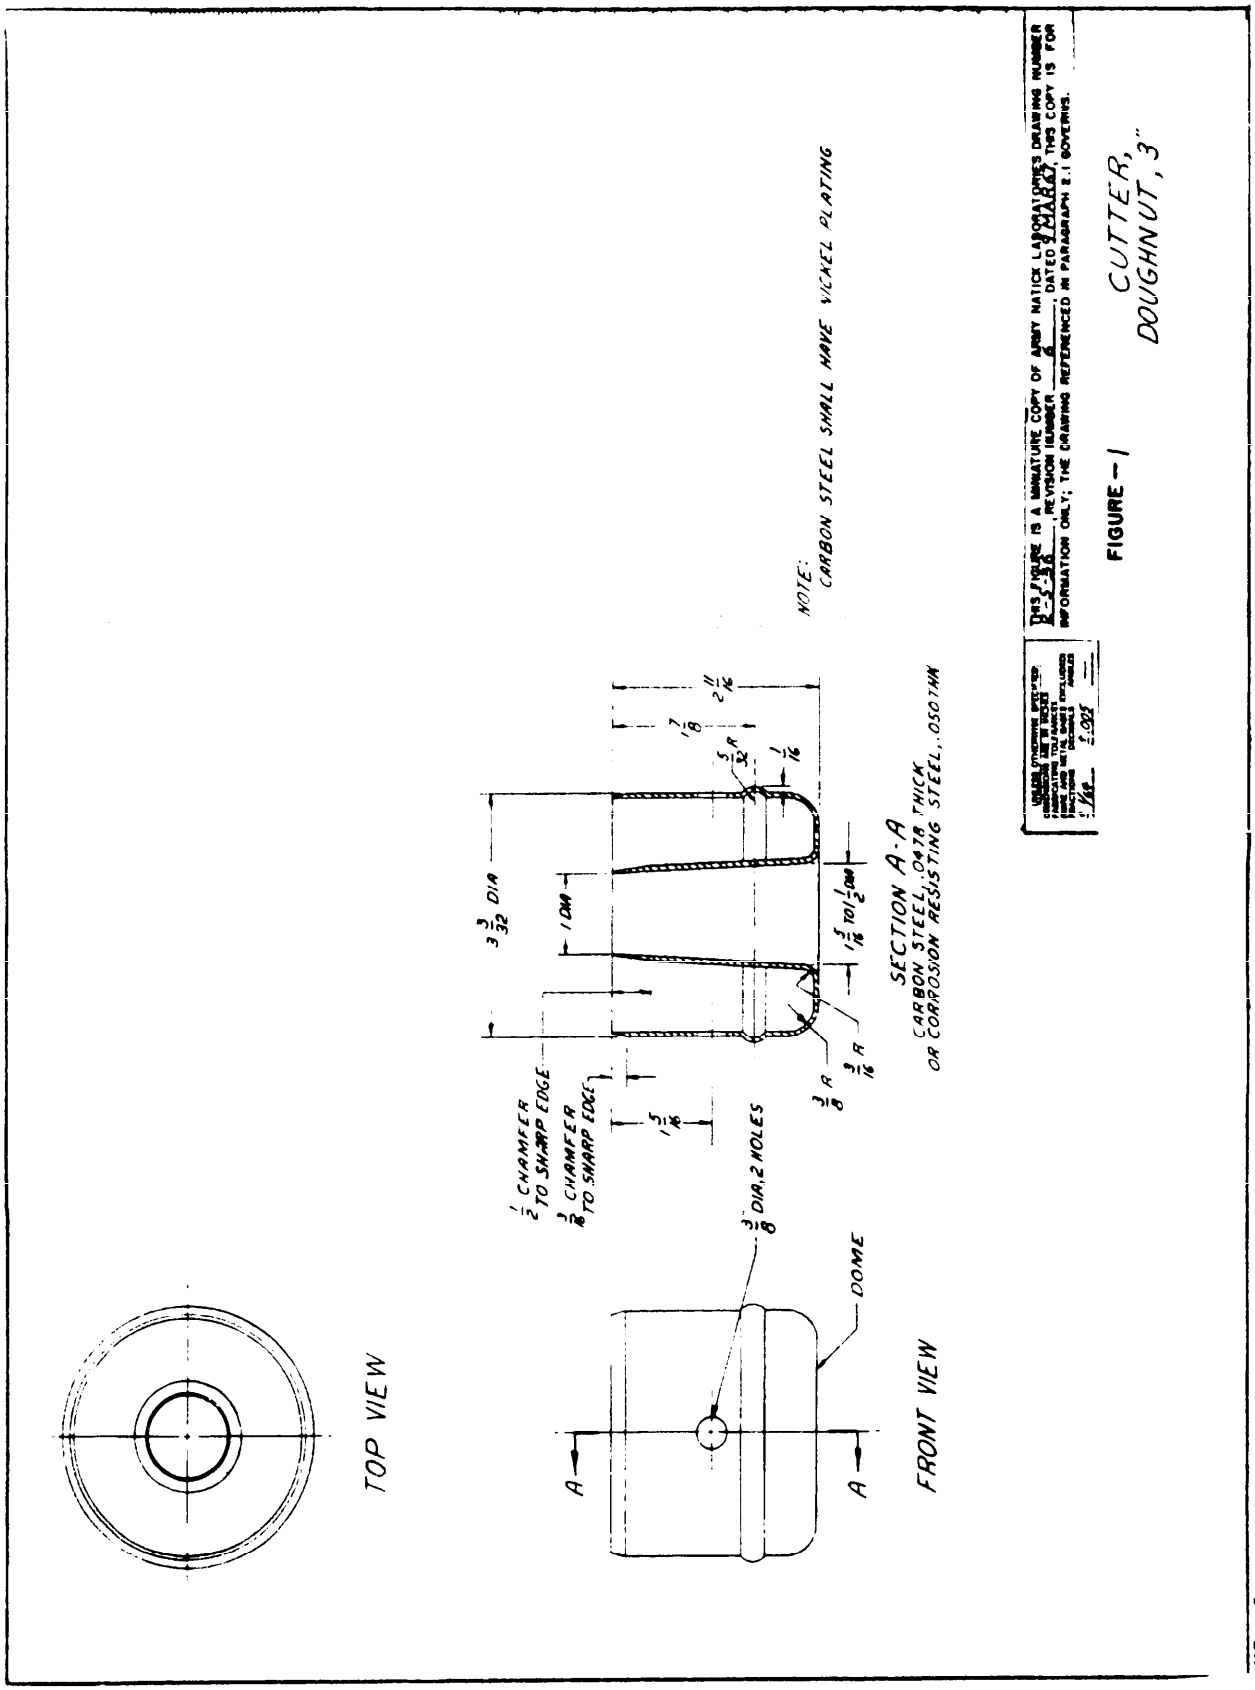


FIGURE - 1 CUTTER, DOUGHNUT, 3"

Source: https://assist.dla.mil -- Downloaded: 202610-21T19:17Z
Check the source to verify that this is the current version before use.

"to detach this form, cut along this line"

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity.

SPECIFICATION

Cutter, Doughnut, 3-Inch MIL-C-40115B

ORGANIZATION	CITY AND STATE	
CONTRACT NO.	QUANTITY OF ITEMS PROCURED	DOLLAR AMOUNT $

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)*	DATE

DD FORM 1 OCT 64 1426

Source: https://assist.dla.mil -- Downloaded: 202640-21T19:17Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
U. S. Army Natick Laboratories
Natick, Massachusetts 01762

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

Commanding General
U. S. Army Natick Laboratories
ATTN: AMXRE-SS
Natick, Massachusetts 01762

FOLD

"to detach this form, cut along this line"

Source: https://assist.dla.mil -- Downloaded: 202640-21T19:17Z
Check the source to verify that this is the current version before use.