MIL-C-40143F(GL)
17 March 1982
SUPERSEDING
MIL-C-40143E(GL)
13 June 1977

MILITARY SPECIFICATION

COATS, WOMEN'S, WOOL AND POLYESTER/WOOL

This specification is approved for use by the Natick Research and Development Laboratories, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers women's wool and polyester/wool coats, components of Army Service uniforms.

1.2 Classification. The coats shall be of three types in the following classes and sizes as specified (see 6.2):

Type I	-	Coat, Woman's, Wool, Army Green 44
Type II	-	Coat, Woman's, Polyester/Wool, Tropical, Army Green 344
Type III	-	Coat, Woman's, Polyester/Wool, Serge, Army Green 344
Class 1	-	Officers
Class 2	-	Enlisted Personnel

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Natick Research and Development Laboratories, Natick, MA 01760 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 8410

Source: https://assist.dla.mil -- Downloaded: 202610-21T19:20Z
Check the source to verify that this is the current version before use.

Schedule of sizes

Extra short	Short	Short-plus	Regular	Regular-plus	Long
8 XS	8 S	8 S +	8 R	8 R +	8 L
10 XS	10 S	10 S +	10 R	10 R +	10 L
12 XS	12 S	12 S +	12 R	12 R +	12 L
14 XS	14 S	14 S +	14 R	14 R +	14 L
16 XS	16 S	16 S +	16 R	16 R +	16 L
	18 S	18 S +	18 R	18 R +	18 L
	20 S		20 R		20 L

2. APPLICABLE DOCUMENTS

* 2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

V-T-280	-	Thread, Gimp, Cotton, Buttonhole.
V-T-295	-	Thread, Nylon.
V-T-301	-	Thread, Silk.
DDD-L-20	-	Label: for Clothing, Equipage, and Tentage (General Use).
DDD-T-86	-	Tape, Textile; Cotton, General Purpose (Unbleached, Bleached, or Dyed).
PPP-B-636	-	Boxes, Shipping, Fiberboard.
PPP-T-45	-	Tape, Gummed, Paper, Reinforced and Plain, for Sealing and Securing.

MILITARY

MIL-C-297	-	Cloth, Interlining, Cotton Warp, and Spun Hair-Wool or Rayon Filling.
MIL-C-368	-	Cloth, Satin, Rayon and Cloth, Twill, Rayon.
MIL-B-371	-	Braid, Textile, Tubular.
MIL-B-593	-	Braid, Textile (Flat).
MIL-C-823	-	Cloth, Serge; Wool, Wool and Nylon, Polyester and Wool.
MIL-B-3461	-	Button, Insignia, Metal, Uniform and Cap.
MIL-P-15064	-	Pads, Shoulder and Sleeve-Head.

Source: https://assist.dla.mil -- Downloaded: 202610-21T19:20Z
Check the source to verify that this is the current version before use.

MIL-C-15065 - Coat Fronts.
MIL-C-16375 - Cloth, Wigan, Cotton.
MIL-C-21115 - Cloth, Tropical: Wool, Polyester/Wool.
MIL-T-43548 - Thread, Polyester, Cotton-Covered.
MIL-T-43718 - Cloth, Twill, Polyester; Polyester and Cotton; Polyester and Rayon.

STANDARDS

FEDERAL

FED-STD-751 - Stitches, Seams, and Stitchings.

MILITARY

MIL-STD-129 - Marking for Shipment and Storage.
MIL-STD-1608 - Provisions for Evaluating Quality of Coats, Women's, Dress.

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply:

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Associations, Inc., Traffic Department, 1616 P Street, N.W., Washington, DC 20036.)

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

3. REQUIREMENTS

3.1 Guide sample. Guide samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variation from this specification may appear in the sample in which case this specification shall govern.

Source: https://assist.dla.mil -- Downloaded: 202640-21T19:20Z
Check the source to verify that this is the current version before use.

3.2 Materials.

3.2.1 Basic material.

3.2.1.1 Type I coat. The basic material shall be 12-ounce (410 g/m^2) wool serge, Army Green 44, conforming to type I, class 8 of MIL-C-823.

3.2.1.2 Type II coat. The basic material shall be 10.0 ounce (340 g/m^2) polyester/wool tropical cloth, Army Green 344, conforming to type III, class 3 of MIL-C-21115.

3.2.1.3 Type III coat. The basic material shall be 12-ounce (410.8 g/m^2) serge, Army Green 344, conforming to type III, class 2 of MIL-C-823.

3.2.2 Lining and binding. The material for lining and for binding of the shields (optional) shall be rayon twill, Army Green 45, conforming to class 1 of MIL-C-368.

3.2.3 Coat fronts. The coat front interlinings shall conform to type IV of MIL-C-15065.

3.2.4 Collar interlining. The material for the collar interlining shall conform to type III, class 1 or 2 of MIL-C-297.

3.2.5 Twill cloth stays. The material for the bridge stays, shoulder loop interlining, and front edge stays shall be natural, bleached, or black polyester, polyester and cotton, or polyester and rayon twill cloth conforming to class 2 of MIL-C-43718 except that the nonfibrous material content, color matching, and colorfastness requirements for perspiration and crocking shall not apply.

3.2.6 Sleeve hem and coat bottom hem interlinings. The material for interlining the sleeve hems and the bottom hems shall be cotton wigan conforming to type I of MIL-C-16375.

3.2.7 Sleeve-heads. The sleeve-heads (two each sleeve) shall conform to type IV of MIL-P-15064 except that the length shall be 5-1/2 to 6 inches (140 to 152 mm).

3.2.8 Shoulder pads. The shoulder pads shall conform to type III, class 1 of MIL-P-15064.

* 3.2.9 Ornamentation (sleeve braid) class 1 coats. The ornamentation for the sleeves of class 1 coats shall be 1/2 inch wide mohair or cotton braid, Black 194, conforming to type I, class 3, or type III, class 2 of MIL-B-593 except that colorfastness to perspiration shall not apply.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:20Z
Check the source to verify that this is the current version before use.

3.2.10 Stay tape. The material for the stays shall be pre-shrunk cotton tape, 3/8 or 1/2 inch (10 or 13 mm) wide for the front edges of the type I coat, 3/8 inch (10 mm) wide for the pocket edges of both type coats and 1/4 inch (6 mm) wide for armholes of both type coats, conforming to type I, class 1, 2, or 3 (dyed black) of DDD-T-86 except that the requirements for nonfibrous material shall not apply. The black tape shall show colorfastness to wet drycleaning, perspiration, and crocking.

3.2.11 Hanger loop braid. The material for the hanger loop shall conform to type IX, class 1 of MIL-B-371. The color shall match the basic material and shall show "good" fastness to crocking and wet drycleaning.

3.2.12 Labels. Each coat shall have a size label and a combination identification-instruction label conforming to DDD-L-20. The fastness to drycleaning requirements of DDD-L-20 shall apply.

* 3.2.12.1 Size label. The size label shall conform to type IV, class 2.

* 3.2.12.2 Combination identification-instruction label. The label shall conform to type IV, classes 1 and 3, with the item description, contract number, and the contractor's name preceding the body of instructions. The cloth coating requirements of the class 3 label shall apply to the combination label. The item description for type I coat shall be:

"COAT, WOMAN'S, WOOL, AG-44"

for type II coat shall be:

"COAT, WOMAN'S, POLYESTER/WOOL, TROPICAL, AG-344"

and for type III coat shall be:

* "COAT, WOMAN'S, POLYESTER/WOOL SERGE, AG-344"

The body of the instructions shall be as follows:

DRY CLEAN ONLY
Use damp cloth for all outside pressing.
Roll-press (without creasing) sleeves and lapels.
Remove gloss marks at edges and seams with iron and damp cloth.

* 3.2.13 Thread.

3.2.13.1 Thread, polyester, cotton-covered. The cotton-covered polyester thread shall conform to MIL-T-43548 in the following sizes except when the use of silk or alternate nylon is indicated in table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:20Z
Check the source to verify that this is the current version before use.

Use	Ticket	Ply
Seaming and stitching of coat	30, 50, 70	2 or 3
Blindstitching, overedging, and machine felling	70	2
Button sewing, hand and buttonholes	30	2 or 3
Button sewing, machine (except automatic sew and shank type (see 3.2.13.5)	30	2 or 3
Braid stitching (class 1 coat only)	50 (black)	2 or 3
Tacking armhole and attaching sleeve-head and pads	30 (white)	2 or 3

3.2.12.2 Thread, basting. The thread for basting shall be bleached or unbleached cotton thread. As an alternate, the cotton-covered polyester thread used for seaming and stitching may be used for basting or a soluble monofilament synthetic basting thread may be used for those operations where the thread is required to be removed, providing the garment is subsequently given a treatment by a drycleaning agent in which synthetic thread is soluble. When the soluble thread is used, any residue remaining on the garment after the drycleaning process shall be brushed off or removed.

3.2.13.3 Thread, silk. The silk thread shall conform to V-T-301. Thread types and sizes shall be as follows:

Use	Type	Size	Ply
Machine top stitching	I	0	3
Machine tacking	I	0	3
Hand felling or machine type felling	III	A or C	2

Source: https://assist.dla.mil -- Downloaded: 202640-21T19:20Z
Check the source to verify that this is the currenversion before use.

3.2.13.4 Thread, nylon. Nylon thread may be used as an alternate to silk thread as indicated in table II. The nylon thread shall conform to the following types and sizes of V-T-295.

Type	Size
IV	A and C
VI	O

* 3.2.13.5 Gimp. The gimp for reinforcing the buttonholes shall be cotton, type I, or II, size 8, Green E, C.A. 66034 color conforming to V-T-280.

3.2.13.6 Automatic button sewing. If an automatic machine which sews and shanks (wraps) the buttons in one operation simulating handsewing is utilized, the thread shall be nylon waxed monocord, special No. 4, having a minimum breaking strength of 15 pounds (67 N) and a minimum length per unit weight of 3600 yards per pound (7250 m/kg) and shall be tested for these requirements and for the colorfastness in accordance with test methods specified in V-T-295.

3.2.13.7 Color. The thread, except the thread for stitching the braid shall be type Army Green E, C.A. 66034. The thread for stitching the braid shall be dyed Black AA, C.A. 66043. The thread for tacking armholes, attaching sleeveheads and pads shall be white.

3.2.13.8 Colorfastness. all dyed thread shall show fastness to light, perspiration, and wet drycleaning equal to or better than the standard sample. When no standard sample is available, the dyed thread shall show "good" fastness to light, perspiration, and wet drycleaning.

3.2.14 Buttons. The buttons shall be metal, uniform, 25-line, hopper back, and 30-line, hopper back, conforming to type I, style 2, class A of MIL-B-3461.

3.3 Design. The coats are a fitted, single breasted, four-button design having slanted hip pockets, an open collar with rounded ends, and two-piece sleeves with shoulder loops. The coats are fully lined.

3.4 Figures. Figures are furnished for information only. To the extent of any inconsistencies between the written specification and the figures, the specification shall control.

3.5 Patterns. Standard patterns to be used for cutting working patterns will be furnished by the Government. The working patterns shall be identical to the Government patterns, which shall not be altered in any way. Patterns provide a seam allowance of 3/8 inch (10 mm) for the joining seams of the front and backs and for the facing-to-lining joining seams; 3/4 inch (19 mm) for side joining seams; 1/4 inch (6 mm) for pocket seams; 1-1/4 inches (32 mm) for coat hem; 2-1/4 inches (57 mm) for sleeve turn-up; and 3/8 inch (10 mm) for all other seams, unless otherwise specified.

Source: https://assist.dla.mil -- Downloaded: 202640-21T19:20Z
Check the source to verify that this is the current version before use.

* 3.5.1 Pattern parts. The component parts of the coat shall be cut from materials as specified and in accordance with the number of parts required, as shown in table I.

TABLE I. List of pattern parts

Material	Pattern nomenclature	Cut Parts
Basic material	Front	2
	Side front	2
	Center back	2
	Side back	2
	Undersleeve	2
	Top sleeve	2
	Top collar	1
	Undercollar	2
	Shoulder loop	2
	Front facing	2
	Pocket	2
Rayon lining cloth	Front lining	2
	Back lining	2
	Side back lining	2
	Top sleeve lining	2
	Undersleeve lining	2
	Shield	4
Twill cloth	Shoulder loop interlining (type II coat)	2
Interlining cloth	Collar interlining	2
	Shapers	
	Undercollar (working)	
	Lapel	
	Pocket	

3.6 Construction.

Source: https://assist.dla.mil -- Downloaded: 202610-21T19:20Z
Check the source to verify that this is the currentversion before use.

3.6.1 Stitches, seams, and stitchings. Stitch, seam, and stitching types specified in table II shall conform to FED-STD-751. Where two or more seam or stitch types are given for the same operation, any one of them may be used. Seam allowances shall be maintained with seams sewn so that raw edges, run-offs, twists, pleats, puckers, or open seams will not result. All seams shall start and finish evenly. Thread tension shall be maintained so that tight or loose tension will not result. Seams, required to be worked out, that have a fold of 1/16 inch (2 mm) or more depth, shall be considered as not having been worked out.

3.6.1.1 Stitches per inch (stitches/cm). The minimum and maximum number of stitches per inch (stitches/cm) shall be as specified in table II.

3.6.1.2 Thread breaks and ends of seams. Ends of all seams and stitchings (except darts), when not caught in other seams or stitchings, shall be backtacked not less than 1/4 inch (6 mm). The ends of a continuous line of stitching shall be overlapped not less than 1/2 inch (13 mm) except on labels where the overlap shall be not less than three stitches. Thread breaks (all stitch types) shall be secured by stitching back of the break not less than 1/2 inch (13 mm). The thread ends of darts shall not be trimmed closer than 1/2 inch (13 mm).

3.7 Manufacturing operations requirements. The coat shall be manufactured in accordance with operation requirements specified in table II. The contractor is not required to follow the exact sequence of operations listed. Any additional basting or holding stitching used to facilitate manufacture is permissible provided that the thread is removed or does not show in the finished coat.

3.7.1 Shade and size marking. The component parts of the coat shall be marked or bundled to insure a uniform shade and size throughout the garment. Any method of marking may be used except:

(1) Corrosive metal fastening devices. No metal device shall be used on rayon lining.
(2) Sew-on type tickets (on rayon only).
(3) Adhesive type tickets which leave an impression or traces of paper or adhesive on the material after removal of the tickets.

3.7.2 Pressing. All pressing as required in table II shall be performed with a heated pressing iron or machine. Any additional underpressing to facilitate manufacture is permissible.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:20Z
Check the source to verify that this is the current version before use.

NO.	* TABLE II MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
1.	Cutting. a. Spread the material without tension in the correct number of plies for the applicable fabric. The cut parts from the top and bottom plies shall match and correspond to the pattern. b. Cut the coat in strict accordance with the patterns furnished, which show directional lines, size, and notches for proper assembly of parts. Directional lines shall be placed in the warp direction of the material. Waist notches shall be shallow to permit alteration. Drill marks for pocket positioning are prohibited. c. Cut all basic material parts of each coat out of the same piece of material except the undercollar which may be cut from ends. Parts cut from ends shall approximate the shade of the base material. d. Cut all rayon lining parts of each coat out of the same piece of material except sleeve linings and shields which may be cut from ends. Parts cut from ends shall approximate the shade of the lining. The two sleeve linings shall match in shade and the two finished shields shall match in shade. e. Cut the binding (optional) for the shields on the bias and 3/4 + 1/16 -0 inch (19 + 2 -0 mm) wide (see operation 4 c).						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:20Z
Check the source to verify that this is the current version before use.

NO.	TABLE II (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
1.	Cutting. (cont'd) f. Cut the twill cloth for bridle stays 3/4 ± 1/8 inch (19 ± 3 mm) wide in either the warp or filling direction (see operation 13 1). g. Type II coat. Cut the twill cloth for front edge stays 1/2 ± 1/16 inch (13 ± 2 mm) wide in the filling direction (see operation 19 b). h. Cut the wigan for interlinings on the bias, 3-1/2 ± 1/8 inches (89 ± 3 mm) wide for sleeve hems (see operation 9 c) and 2 ± 1/8 inches (51 ± 3 mm) wide for coat hem (see operation 18). i. Cut the basic material for the buttonhole stripping of sufficient width to allow for a 1/8 inch (3 mm) finished piping. j. Cut the hanger loop of sufficient length to comply with the finished length in operation 29 d.						
2.	Replacement of damaged parts. Care shall be exercised during the spreading, cutting, manufacturing operation to assure that material defects and damages, as classified in MIL-STD-1608, are excluded and replaced with non-defective and properly matched material.						

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:20Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)
MANUFACTURING OPERATIONS REQUIREMENTS

NO.		STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
3.	Marking. Mark or ticket all component parts of basic material and rayon linings (including parts cut from ends) to insure a uniform shade and size, and proper assembly throughout the coat.						
4.	Make shields.						
	a. Superimpose two shield pieces face to face and stitch around outer arc.	301	SSa-1	10-16 (4-6)	50	50	
	b. Turn shield to right side, work out seams and press. Prior to pressing, the shields may be raise stitched on the underside.	301	LSq-2(b)	12-16 (5-6)	50	50	
	or						
	c. Superimpose two shield pieces back to back and bind outer arc edges together. If BSb-1 seam type is used, the raw edge shall be on the underside on the finished coat. The outer side of the binding shall finish 1/4 to 5/16 inch (6 to 8 mm) wide and the stitching shall be 1/16 inch 2 mm) from the folded edge.	301 301	BSc-1 or BSb-1	12-16 (5-6) 12-16 (5-6)	50 50	50 50	
5	Make lining fronts and attach combination identification-instruction label.						
	a. Fold waist darts as indicated by marks on pattern and stitch. The darts shall be tapered to nothing, 3/4 to 1 inch (19 to 25 mm) beyond drill holes.	301	OSf-1	12-16 (5-6)	50	50	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:20Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
5.	Make lining fronts and attach combination identification-instructions label. (cont'd)						
	b. Position the label on the left (as worn) front with the right side of label 2 to 2-1/2 inches (51 to 64 mm) from, and parallel with, the front raw edge of lining. The top label shall be at least 1/4 inch (6 mm) below the waist darts. Stitch label on all four sides. The stitching shall not be through the printing.	301	LSbj-1	10-14 (4-6)	50	50	
6.	Make lining sleeves and lining backs.						
	a. Stitch undersleeves to top sleeves.	301	SSa-1	12-16 (5-6)	50	50	
		or 401	SSa-1	12-16 (5-6)	50	70	
	b. Join center back pieces.	301	SSa-1	12-16 (5-6)	50	50	
		or 401		12-16 (5-6)	50	70	
	c. Stitch center back to side backs.	301	SSa-1	12-16 (5-6)	50	50	
		or 401	SSa-1	12-16 (5-6)	50	70	
7.	Assemble lining.						
	a. Stitch side seams.	301	SSa-1	12-16 (5-6)	50	50	
		or 401	SSa-1	12-16 (5-6)	50	70	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:20Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
7.	Assemble lining. (cont'd)						
	b. Stitch shoulder seams at armhole end 2 to 2-1/2 inches (51 to 64 mm), leaving the remainder of shoulder open.	301	SSa-1	12-16 (5-6)	50	50	
	c. Press all seams, except center back seam, toward back. Press darts with folded edges toward fronts or back.						
	d. Baste shields to base of armholes with the center of shield placed 1/2 to 3/4 inch (13 to 19 mm) from side seam toward front.	Hand or machine	SSa-1 SSa-1				
	e. Set sleeves to body, matching notches, distributing sleevehead fullness evenly at top and catching the raw edge of shield in the seaming. The sleeve joining seams shall be turned toward the undersleeve.	301 or 401	SSa-1 SSa-1	12-16 (5-6) 12-16 (5-6)	50 50	50 70	
8.	Make shoulder loops.						
	a. Position interlining on shoulder loop and baste into position (type II coat only).	Hand or machine					
	b. Make a 3/4 + 1/16 inch (19 + 2 mm) piped buttonhole on the center of each shoulder loop positioned so that on the finished loops, the end of buttonhole will be 7/8 ± 1/16 inch (22 ± 2 mm) from point. The piping shall be not more than 1/8 inch (3 mm) wide and the buttonhole shall not be off center by more than 1/8 inch (3 mm) on the finished loop. The underside of the shoulder loop (type I						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:20Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
8.	Make shoulder loops. (cont'd)						
	and III coats), at the buttonhole area, shall be reinforced with a piece of wigan, or twill cloth. (See operation 14 for buttonhole construction details).						
	c. Fold loop lengthwise and seam.	301 or	SSa-1	12-16 (5-6)	50	50	
		401	SSa-1	12-16 (5-6)	50	70	
	d. Shift the seam to the center of loop and, with the seam spread open, stitch around the pointed end.	301 or	SSa-1	12-16 (5-6)	50	50	
		401	SSa-1	12-16 (5-6)	50	70	
	e. Press seam open.						
	f. Trim point, turn loop, and force out point.						
	g. Center the seam in line with buttonhole opening and baste or press the edge of loop.	Machine or hand					
	h. Rip center seam the length of the buttonhole and fell the edges of the opened seam to button-hole piping securely tacking ends.	Hand		8-10 (3-4)	A or C (silk or nylon)		
	i. Press loops after removing bastings if option to press in operation 8 g was not used.						
	or						

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:20Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
8.	Make shoulder loops. (cont'd)						
	The buttonholes shall be eyelet-end, square-bar, cut-first type worked over gimp with the ends of the gimp pulled through to the underside. The ends of the buttonhole stitching shall be tacked by hand or by machine, the width of the bar section, catching the ends of the buttonhole stitching and the gimp. The buttonhole shall be 3/4 to 13/16 (19 to 21 mm) inch long, centrally widthwise located (+ 1/16) on the loop, with a distance of 13/16 to 15/16 inch (21 to 24 mm) between the end of the buttonhole and the point of the shoulder loop. The purl of the buttonhole shall be on the outside of the loop. All loose thread ends shall be trimmed or fused within 1/8 inch (3 mm) of the tack.						
	j. Fold loop in half lengthwise and stitch raw side edges.	301 or	SSa-1	10-14 (4-6)	50	50	
		401	SSa-1	10-14 (4-6)	50	70	
	k. Press seam open and flat with seam off center of loop.						
	l. Position interlining on seam outlet and stitch into position.	301		8-14 (4-6)	50	50	
	m. Seam point of loop.	301 or	SSe-2(a)	10-14 (4-6)	50	50	
		401	SSe-2(a)	10-14 (4-6)	50	50	
	n. Trim point, turn loop and force out point with the seam on the underside centered. Baste or press edge of loop.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:20Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
8.	Make shoulder loops. (cont'd)						
	o. Make a buttonhole centered on the pointed end of loop.	Machine		50-56 per buttonhole	30	30	
	p. Tack ends of buttonhole stitching and gimp by machine.	Machine		21 per Bartack	50	50	
9.	Make coat sleeves.						
	a. Stitch forearm seams, matching notches.	301	SSa-1	12-16 (5-6)	50	50	
		or 401	SSa-1	12-16 (5-6)	50	70	
	b. Shape-press seam open without stretching.						
	c. Place wigna (see operation 1 h) across sleeve with the bottom edge of wigan 1/2 to 3/4 inch (13 to 19 mm) below turn-up notches and stitch the forearm seam allowance and backarm seam allowance of either the top or under sleeve to the wigan.	101	SSa-1 and LSbd-1	6-10 (3-4)	50		
		101 or		6-10 (3-4)	50		
		301	SSa-1 and LSbd-1	6-10 (3-4)	50	50	
		301		6-10 (3-4)	50	50	
	d. Baste wigan to sleeve along the fold line, as indicated by marks on pattern. (This operation is optional.)	Hand or machine					
	e. Turn up bottom of sleeve as indicated by marks on pattern and baste along folded edge.	Hand or machine	OSf-1 OSf-1				
	f. Press bottom of sleeve. Remove bastings.						

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T19:20Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)
MANUFACTURING OPERATIONS REQUIREMENTS

NO.		STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
9.	Make coat sleeves. (cont'd)						
	g. (Class 1 coat only.) Stitch braid to sleeve with the bottom edge of braid 3 ± 1/8 inches (76 ± 3 mm) from bottom edge of finished sleeve. The stitching shall be 1/16 to 3/32 inch (2 to 3 mm) from each edge of braid.	301	SSau-2	12-16 (5-6)	50 (black)	50 (black)	
	h. Stitch backarm seam, matching notches. In class 1 coats, the top and bottom edges of braid shall be aligned and the ends of the braid shall be caught in the seaming.	301 or 401	SSa-1 SSa-1	12-16 (5-6) 12-16 (5-6)	50 50	50 70	
	i. Press seam open.						
	j. Blindstitch top of sleeve hem to sleeve wigan.	103 or Hand		4-6 (2-3) 4-6 (2-3)	70 70		
	k. Turn sleeve to right side.						
	NOTE: Operations 9 d and 9 e may be performed after stitching backarm seam, operation 9 h.						
10.	Make collar.						
	a. Superimpose undercollar pieces, face to face, and stitch center back seam.	301	SSa-1	12-16 (5-6)	50	50	
	b. Press seam open.						
	c. Trim seam allowances of undercollar seam clipping ends of seam.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:20Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
10.	Make collar. (cont'd)						
	d. Overlap collar interlining pieces at center back and stitch together.	301	LSa-1	10-16 (4-6)	50	50	
	e. Place interlining 3/8 to 1/2 inch (10 to 13 mm) from neck edge of undercollar and quilt with four to six rows of equally spaced blindstitching	103 or 306 or 313 or 314	SSm-4 to 6	4-6 (2-3)	70		
			SSm-4 to 6	4-6 (2-3)	70	70	
			SSm-4 to 6	4-6 (2-3)	70	70	
			SSm-4 to 6	4-6 (2-3)	70	70	
	f. Press quilted undercollar.						
	g. Mark outer edge of undercollar (on interlining side) in accordance with the applicable sized undercollar marker.						
	h. Turn 3/8 inch (10 mm) allowance of neck edge of undercollar over interlining and baste along edge.	Hand or machine					
	i. Fold quilted undercollar (interlining outside), 1-1/8 to 1-1/4 inches (28 to 32 mm) above the turned-up neck edge at center of undercollar, extending 1-3/4 to 2 inches (45 to 51 mm) on each side of center and then tapering to nothing at lower turned-up collar ends. Crease fold and shape-press the collar.						

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:20Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)
MANUFACTURING OPERATIONS REQUIREMENTS

NO.		STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
10.	Make collar. (cont'd)						
	j. Stitch the mid portion of the crease through all plies 1/16 to 3/32 inch (2 to 3 mm) in from edge for a distance of 3-1/2 to 4 inches (89 to 102 mm), extending from 1-3/4 to 2 inches (44 to 51 mm) on each side of center. This will become the permanently centered breakline of the undercollar.	301	OSf-1	12-16 (5-6)	50	50	
	k. Baste quilted undercollar to top collar 1/8 to 1/4 inch (3 to 6 mm) from edge distributing top collar fullness along shoulder area and at rounded ends.	Hand or machine					
	l. Stitch top collar to undercollar as marked, (see operation 10 g) maintaining the distributed fullness in shoulder areas and ends.	301	SSa-1	12-16 (5-6)	50	50	
	m. Remove basting, trim, turn collar, work out edges, and baste around outer collar edge, rolling the edge of the top collar to the underside. Place a second row of basting around collar edge distributing the top collar fullness evenly.	Hand or machine					
	n. Press collar edges and ends removing undercollar crease line beyond edges of breakline stitching (see operation 10 j) and shaping the collar. Do not crease stitched breakline. Do not form a crease or fold on collar.						

Source: https://assist.dla.mil - Downloaded: 2026-10-21T19:20Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
10.	Make collar. (cont'd)						
	o. Trim top collar at neck edge, allowing sufficient fullness across width to permit collar to roll and set properly at neck, leaving a seam allowance beyond the folded neck edge of the undercollar.						
11.	Make backs.						
	a. Join the four back pieces.	301	SSa-1	12-16 (5-6)	50	50	
		or 401	SSa-1	12-16 (5-6)	50	70	
	b. Press seams open.						
	c. Sew 1/4 inch (6 mm) tape along each armhole from side seamline to within 3/4 inch (19 mm) from shoulder seamline, holding tape taut to prevent material from stretching.	301	SSaa-1	12-16 (5-6)	50	50	
		or 401	SSaa-1	12-16 (5-6)	50	50	
	NOTE: Taping back and front armhole may be done in one operation (see operation 13 f).						
12.	Make pockets on fronts.						
	Finished appearance. The pockets shall match in size and shape and the pocket opening edges shall be the same length and not be fuller or tighter than the side front.						

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:20Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
12.	Make pockets on fronts. (cont'd)						
	a. Fold darts as indicated by marks on pattern and stitch. The darts shall be tapered to nothing 3/4 to 1 inch (19 to 25 mm) beyond drill holes.	301	OSf-1	12-16 (5-6)	50	50	
	b. Press darts toward front, shrinking fullness from the ends. Do not stretch.						
	c. Mark fold line on pocket piece in accordance with applicable sized pocket shaper.						
	d. Stitch 3/8 inch (10 mm) stay tape, held taut, to underside of pocket piece along edge of fold line (opening) as indicated by marks on pattern.	301	SSau-1	10-16 (4-6)	50	50	
	e. Stitch pocket to front, matching notches.	301	SSa-1	14-16 (5-6)	50	50	
	f. Press seam open. (This operation is optional.)						
	g. Fold pocket over the edge of the stay tape and baste along folded edge (pocket opening). Baste around the curve through both plies.	Hand or machine					
	h. Top stitch around curve of pocket on each side of joining-seam with the rows of stitching 1/16 inch (2 mm) from joining seam.	301	SSz-3(b)	12-16 (5-6)	0 (silk or nylon) or 50	0 (silk or nylon) or 50	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:20Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
13.	Assemble fronts.						
	a. Join side front to front, matching notches, working in bust fullness between notches, and backtacking seam at corner of pocket.	301 or 401	SSa-1 SSa-1	12-16 (5-6) 12-16 (5-6)	50 50	50 70	
	b. Join front to side front from pocket to side seam, backtacking seam at pocket end.	301 or 401	SSa-1 SSa-1	12-16 (5-6) 12-16 (5-6)	50 50	50 70	
	c. Close pocket, backtacking each end of seam.	301	SSa-1	12-16 (5-6)	50	50	
	d. Bartack ends of pocket opening through all plies, along the top stitching of pocket for a distance of 1/4 to 1/2 inch (6 to 13 mm). An automatic straight tack may be used. (Do not use bartack).	301 301		12-16 (5-6) 28 per tack	0 (silk or nylon) or 50 0 (silk or nylon) or 50	0 (silk or nylon) or 50 0 (silk or nylon) or 50	
	NOTE: The same type thread utilized in operation 12 h, shall be used in the above operation.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:20Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
13.	Assemble fronts. (cont'd)						
	e. Press front joining-seam open, slashing seam allowance at pocket. Press diagonal seam down toward bottom of coat.						
	f. Stitch 1/4 inch (6 mm) tape to armholes from side seamline to 3-1/2 to 4-1/2 inches (89 to 114 mm) from raw edge of shoulder.	301 or 401	SSaa-1 SSaa-1	10-16 (4-6) 10-16 (4-6)	50 50	50 70	
	g. Fit coat front interlining on the front of coat with seams aligned, keeping the interlining slightly full to support shape of fronts. Baste along seam continuing the basting to the bottom of coat.	301 or hand					
	h. Tack front joining seam of coat to coat front interlining starting 5 inches (127 mm) from shoulder to 1-1/2 inches (38 mm) from top of pocket.	301 or Hand		1-2 (1) 2-4 (1-2)	50	50	
	i. Tack pocket seam allowance to coat front interlining.	301 or Hand		1-2 (1)	50	50	
	j. Baste through interlining and front along breakline of lapel and down front edge to bottom of coat.	301 or Hand					

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:20Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
13.	Assemble fronts. (cont'd)						
	k. Baste front to interlining, across shoulder, along armhole, and down the back edge. The felt padding shall be trimmed along the shoulder so that it will not be caught in the shoulder seaming of coat (see operation 21).	Hand or machine					
	l. Position bridle stays (see operation 1 f) on interlinings. With the front edge of the stays not more than 1/4 inch (6 mm) on the inside of breakline from neck edge to 1-3/4 ± 1/4 inches (44 ± 6mm) from front edge, baste with the tape held slightly taut.	Hand or machine					
	m. Blindstitch bridle stays along both edges.	103	SSm-2	4-6 (2-3)	70		
		or 306	SSm-2	4-6 (2-3)	70	70	
		or 313	SSm-2	4-6 (2-3)	70	70	
		or 314	SSm-2	4-6 (2-3)	70	70	
	n. Quilt lapels of coat with not less than four rows of evenly spaced blindstitching with fullness in the interlining between the rows to roll lapels.	103	SSm-4	4-6 (2-3)	70		
		or 306	SSm-4	4-6 (2-3)	70	70	
		or 106	SSm-4	4-6 (2-3)	70		

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T19:20Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)
MANUFACTURING OPERATIONS REQUIREMENTS

NO.		STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
14.	Make buttonholes on front. Finished appearance. The buttonholes shall be 1 ± 1/16 inch (25 ± 2 mm) long, positioned on the right front as indicated by marks on pattern, and front end of buttonhole shall be 3/4 inch (19 mm) from front edge in the finished coat. The piping shall be not more than 1/8 inch (3 mm) wide. a. Mark the position and the length of the buttonholes on the front. b. Fold the strip of basic material in half lengthwise and stitch 1/8 inch (3 mm) from the folded edge.	301	OSf-1	12-16 (5-6)	50	50	
	c. Cut the strip in two pieces for each buttonhole, sufficiently long to extend beyond the ends of the buttonhole. d. Place a piece of stripping on each buttonhole mark with the raw edges abutted. Stitch to front through interlining, with the stitching superimposing the 1/8 inch (3 mm) stitching on the buttonhole strip, and securely tack ends. The two parallel lines of stitching shall be not more than 1/4 inch (6 mm) apart. NOTE: The line of stitching 1/8 inch (3 mm) from the folded edge (see operation 14 b) may be omitted.	301		12-16 (5-6)	50	50	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:20Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
14.	Make buttonholes on front. (cont'd)						
	e. Cut between the two parallel rows of stitching through front and interlining, tongue notching the ends.						
	f. Turn piping joining-seam to inside. Turn in the tongue ends and stitch on inside across ends of buttonhole through tongue and piping only. The one thread zigzag bartack may be used.	301 or 101		12-16 (5-6) 20-26 (8-10)	50 50	50	
	g. Baste buttonholes closed.	Hand or machine					
	h. Trim excess material at each end of buttonhole to not less than 3/8 inch (10 mm) from the stitching across the ends.						
	NOTE: The buttonholes may be made in one operation using a special machine with suitable material for reinforcement.	101		12-16 (5-6)	50		
	or						
	The buttonhole shall be regular machine type (see operation 3.1)						
15.	Join coat at sides.						
	a. Join fronts to back taking care not to stretch waistline. The interlining shall not be caught in the stitching.	301 or 401	SSa-1 SSa-1	12-16 (5-6) 12-16 (5-6)	50 50	50 70	

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T19:20Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
15.	Join coat at sides. (cont'd) b Press side seams open and flat. Avoid stretching waistline. Press taped armholes, shrinking out fullness where tape was held taut. c. Stitch interlinings to fronts at neckline, at shoulder and at armholes not more than 3/16 inch (5 mm) from edges. Trim excess interlining from edges.	301	SSa-1	12-16 (5-6)	50	50	
16.	Press fronts. Press left and right fronts on women's left and right front form pressing machines.						
17.	Trim front and bottom edges. a. Position lapel shaper from point of shoulder to lower end of lapel. Mark lapels in accordance with lapel shaper and trim lapel. If necessary, any frayed ends along front edge of coat may be trimmed. b. Trim interlining 1/4 inch (6 mm) across lapels, down front, and across bottom. The interlining at the bottom may be cut diagonally so that the bottom edge of interlining will not be caught in the stitching across the bottom.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:20Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
18.	Interline bottom of coat.						
	Position wigan at bottom of coat with the bottom edge 1/4 to 1/2 inch (6 to 13 mm) below the hem fold line and baste along the hem fold line. The wigan shall overlap the back edge of the front interlining 1 to 1-1/4 inches (25 to 32 mm).	301, hand or machine	SSa-1	10-14 (4-6)	50	50	
19.	Join facings to fronts.						
	a. Baste facings to fronts, allowing fullness over bust area.	Hand or machine					
	b. Seam facing to fronts 1/8 to 3/16 inch (3 to 5 mm) from edge, through the 3/8-inch (10 mm) or the 1/2-inch (13 mm) stay tape (type I and III coat) and 1/2-inch (13 mm) cross-cut twill for (type II coat). Stitch from lapel notch, across top of lapel, down front and across bottom to end of facing with the back edge of facing turned back. Continue stitching across bottom of coat anchoring the wigan. The stay shall be sewn on slightly loose along lapel edges. The fronts shall be even at bottom when coat is finished. The stitching anchoring the wigan shall not be exposed on the outside of the finished coat.	301	SSab-1	12-16 (5-6)	50	50	
	c. Fell the back edge of stay (tape, or twill cloth) to the interlining along fronts and lapels.	103 or hand		3-4 (1-2) 3-4 (1-2)	70		
	d Remove basting (operation 19 a) and press the edge seam open.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T19:20Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)
MANUFACTURING OPERATIONS REQUIREMENTS

NO.		STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
20.	Baste coat edges and hem bottom.						
	a. Slash seam allowance at collar notch on top lapel, trim, and turn facing.						
	b. Work out points and edges. Baste edges around coat from lapel step to lapel step, turning up coat hem and rolling the joining-seam toward the underside of lapel along the lapel edge and rolling the joining seam toward the inside of coat along the front and bottom edge of coat. Baste a second row 1/2 to 3/4 inch (13 to 19 mm) from first row maintaining the rolled-in edge.	101 or hand		4-6 (2-3) 4-6 (2-3)			
	c. Blindstitch the coat hem through the wigan catching the basic fabric. The stitching shall not be visible on the outside of the coat.	103 or	Efa-1	4-6 (2-3)	0 (silk or nylon) or 70		
		hand or	EFa-1	4-6 (2-3)	A or C (nylon or silk)		
		306	EFa-1	4-6 (2-3)	0 (silk or nylon) or 70	0 (silk or nylon) or 70	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:20Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS.	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
21.	Join shoulders.						
	a. Join shoulder seams matching front and back seams and easing in fullness on back catching the front interlining in the stitching.	301 or 401	SSa-1	12-16 (5-6)	50	50	
			SSa-1	12-16 (5-6)	50	70	
	b. Press shoulder seams open and flat without stretching seam.						
22.	Set shoulder loops.						
	Position shoulder loops so that on the finished coat the back edge of loop is 3/4 ± 1/8 inch (19 ± 3 mm) back of shoulder seam, the buttonhole opening is 1/4 ± 1/8 inch (6 ± 3 mm) forward from shoulder seam, and the point of loop is not more than 1/4 inch (6 mm) from, but not beyond, the felled edge of undercollar. Baste or stitch to edge of armholes.	Hand or machine					
23.	Set collar.						
	Finished appearance. The collar shall roll on the finished coat and hug the neckline, and the collar edges shall not curl. The collar shall cover the felled seam at the back and the undercollar shall not be exposed at the bottom edge. The finished width of the collar at the center back shall not exceed 3 inches (76 mm). The undercollar center seam shall be aligned with center seam of coat, 1/4 inch (6 mm) tolerance.						

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:20Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)
MANUFACTURING OPERATIONS REQUIREMENTS

NO.		STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
23.	Set collar. (cont'd)						
	a. Trim gorge seam of facing to correspond with the neck edge of coat. Stitch top collar to front facing from end of step to a point not less than 1 inch (25 mm) back of lapel breakling.	301	SSa-1	12-16 (5-6)	50	50	
	b. Slash seam allowance of facing at end of stitching. Gorge seam may be pressed open.						
	c. With gorge seam spread open, tack top collar seam to neck seam and stitch the top collar to neck from gorge to gorge.	301 or hand	SS-bd-1	12-16 (5-6)	50	50	
	d. Baste undercollar to coat with folded edge of undercollar 3/8 inch (10 mm) from neck edge of coat.	Hand or machine					
	e. Hand or machine fell undercollar to coat securely tacking the ends of collar to coat front.	Hand or		8-12 (3-5)	A or C (nylon or silk)		
		Machine (similated hand-type felling)		6-8 (2-3)	A (silk or O nylon)		

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:20Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
24.	Set sleeves.						
	Finished appearance. The sleeves shall hang alike with the front of each in the same relative position to the front of the pocket openings. Front and back shall have a rolled effect. Sleeves may be pressed and rolled prior to hanging to facilitate check on the hang of sleeve.						
	a. Stitch sleeves to armholes, matching notches, distributing the sleevehead fullness between notches (at top), and catching the end of the shoulder loops in the stitching.	301 or 401	SSa-1 SSa-1	12-16 (5-6) 12-16 (5-6)	50 50	50 70	
	b. Press seam flat all around armholes, shrinking out the fullness at top of sleeve.						
25.	Set shoulder pads and sleeve-heads.						
	a. Center pads on each shoulder with edge of pad even with edge of armhole and stitch to armhole seam allowance, across the straight edge of pad.	301 or hand		4-6 (2-3) 4-6 (2-3)			
	b. Tack neck end of pads to the shoulder seam allowance.	Hand		2-4 (2-3)			
	c. Position one sleeve-head on the front and one on the back of each sleeve 1 ± 1/4 inches (25 ± 6 mm) from shoulder seam with the folded edge of sleeve-head even with the raw edge of armhole and with the wadding side against the sleeve. Stitch sleeve-heads to armholes.	Hand or 301		2-4 (2-3) 4-6 (2-3)			

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:20Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)
MANUFACTURING OPERATIONS REQUIREMENTS

NO.		STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
26.	Join lining to coat.						
	a. Stitch coat lining to coat facings.	301 or 401	SSa-1 SSa-1	12-16 (5-6) 12-16 (5-6)	50 50	50 70	
	b. Press seams toward side of coat.						
27.	Baste facings to coat.						
	Baste facings to coat diagonally from lapel breakline to point of lapel and along breakline, placing the fullness over bust and on lapels to allow lapel to roll.	Hand or machine					
28.	Tack lining to coat.						
	a. Blindstitch seam allowance at back edge of facing to interlining starting not more than 2-1/2 inches (64 mm) down from shoulder to 2-1/2 inches (64 mm) above finished bottom of coat.	103 or hand		2-4 (1-2) 2-4 (1-2)	70 70		
	b. Tack lining armhole seams to the straight edge of shoulder pad.	Hand of machine		2-3 (1-2)	70		
	c. Match forearm seam of sleeve linings to forearm seam of coat sleeves and tack the seam allowances together starting 5 inches (127 mm) up from finished bottom of sleeve to 5 inches (127 mm) from armhole.	Hand or machine			70		

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:20Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
29.	Baste linings and attach size label and hanger loop.						
	a. Baste pleat on each front shoulder as indicated by marks on pattern with the outside fold of pleat facing the armhole.	Hand or machine					
	b. Baste back shoulder to front shoulder (unfinished portion) with the back lapped over fronts.	Hand or machine	LSb-1				
	or						
	c. Stitch unfinished portion of shoulder seam.	301	SSa-1	12-16 (5-6)	50	50	
	d. Baste lining to coat across back neck forming pleat at center back and securely catching the ends of the hanger loops and the top edge of the size label in the stitching. The outside folded edge of the pleat shall face the right front of coat (as worn). The size label shall be positioned so that the printing on the label will not be covered by the collar. The hanger loop shall measure 2 ± 1/2 inches (51 ± 13 mm) from outside edge to outside edge in the finished coat.	Hand or machine					
	e. Baste back pleat from neck to bottom of lining.	Hand or machine					

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T19:20Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
29.	Baste linings and attach size label and hanger loop. (cont'd)						
	f. Tack, with not less than three cross stitches, across front pleats through the three plies, 3-1/4 ± 1/4 inches (83 to 6 mm) down from shoulder seam and across back pleat, 4-1/2 ± 1/4 inch (114 ± 6 mm) from neck edge and at waistline. Do not catch the interlining or shoulder pad in the stitching.	204			50		
	or						
	In lieu of the use of tacks (cross stitches), the front shoulder pleats and center back pleats must be carefully pressed before basting threads are removed.						
	g. Turn under bottom edge of lining with fold 1/2 ± 1/8 inch (13 ± 3 mm) above the bottom edge of coat and baste 3/8 to 1/2 inch (10 to 13 mm) above folded edge.	Hand or machine					
30.	Fell coat.						
	a. Fell unfinished portion of shoulder seams if lining if not seamed (see operation 29 c).	Hand or machine type hand felling		6-8 (2-3) 6-10 (3-4)	A or C (nylon or silk) A (silk or O nylon)		

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:20Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
29.	Baste linings and attach size label and hanger loop. (cont'd)						
	b. Turn under bottom edge of sleeve lining so that the folded edge is 1 to 1-1/2 inches (25 to 38 mm) from the finished bottom edge of sleeve and fell or blindstitch.	Hand or machine type hand felling		6-8 (2-3) 6-10 (3-4)	A or C (nylon or silk) A (silk or		
		or 103		6-8 (2-3)	O nylon) O (silk or nylon) or 70		
		or 314		6-8 (2-3)	O (silk or nylon) or 70	O (silk or nylon) or 70	
	c. Fell or blindstitch lining to coat hem. The top ply of folded edge of lining shall not be caught in the stitching.	Hand or		6-8 (2-3)	A or C (nylon or silk) or 70		
		313		6-8 (2-3)	O (silk or nylon) or 70	O (silk or nylon) or 70	

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T19:20Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
30.	Fell coat. (cont'd)						
	d. Fell corners of lining and facing at bottom of coat with the raw edge of facing turned in.	Hand or machine type hand felling		6-8 (2-3) 6-10 (3-4)	A or C (nylon or silk) A (silk or O nylon)		
	e. Tack the lower edge (underside) of shields, at center, to lining. The tacking shall not catch the top ply of the shield.	Hand		4-6 per tack	A or C (nylon or silk)		
31.	Finish buttonholes on fronts.						
	a. Baste around buttonholes.	Hand or machine					
	b. Slit facing the length of buttonhole in line with opening. Turn in raw edge and fell to piping, securely tacking ends. Indentations along front edge of coat, in line with the buttonholes, shall be avoided. or The buttonholes shall be eyelet-end, square-bar, cut-first type worked over gimp with the ends of the gimp pulled through to the underside. The ends of	Hand		8-10 (3-4)	A or C (nylon or silk)		

Source: https://assist.dla.mil/ -- Downloaded: 2026-10-21T19:20Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
31.	Finish buttonholes on fronts. (cont'd)						
	the buttonhole stitching shall be tacked by hand or by machine, the width of the bar section, catching the ends of the buttonhole stitching and the gimp. The purl of the buttonhole shall be on the outside of the loop. All loose thread ends shall be trimmed or fused within 1/8 inch (3 mm) of the tack.						
	c. Remove second basting and mark right front for four buttonholes as indicated by marks on pattern.						
	d. Make four buttonholes on right front, as marked, with the inside edge of the eyelet 11/16 to 13/16 inch (17 to 21 mm) from the finished edge of the coat. The cut of the finished buttonhole after tacking shall measure 15/16 to 1-1/16 inches (24 to 27 mm) long.	Machine		60-68 per buttonhole	30	30	
	e. Tack ends of buttonhole stitching and gimp by machine with a 1/4 inch (6 mm) bartack.	Machine		21 per bartack	30		
32.	Clean coats.						
	a. Trim all ends of stitching and loose threads.						
	b. Remove all bastings except edge bastings and lapel bastings which shall be removed after pressing edges.						
	c. Remove all spots, stains, and shade tickets.						

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T19:20Z
Check the source to verify that this is the current version before use.

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

NO.	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
33.	Press finished coat. Finished appearance. The finished pressed coat shall be free of gloss, wrinkles, creases, spots and impressions from marking ticket, thread, seam or binding. The bust seam shall not break or "cave in" below the shoulders. The sleeves shall hang and balance evenly. The sleeves shall not be creased and the collar ends and lapels shall roll. The top collar shall not be creased at center back. a. Press lapels, front edges, bottom, and top collar (which shall not be b. Remove bastings. c. Press entire coat. Press edges flat. Press fronts on women's right and left front form pressing machines. Roll press the sleeves. Roll press all edges of collar. Press armholes solid from the inside and crease along the edge of the seam allowance at armpit. Do not stretch armhole. d. Press body lining smooth and flat with a heated pressing iron. e. Brush coat and place on hanger or form until thoroughly dry.						

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:20Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
34.	Attach buttons.						
	a. Mark the location for the buttons on the left front to correspond with the buttonholes and position 7/8 inch (22 mm) from the front edge of the coat.						
	b. Mark the location for buttons on each shoulder to correspond with neck end of buttonholes on shoulder loops.						
	c. Sew a 30-line button on each mark on front through the front, interlining and facing with the eagle in an upright position. Hand sewn buttons shall be tacked with not less than two stitches and the thread ends shall be hidden.	301 or 101 or hand or 801 (see figure 3)		14-16 per button 14-16 per button 4 double thread per button 12 (min) per button	30 30 30 4 (nylon)	30	
	d. Sew a 25-line button on each mark on shoulder through all plies with the spread wings of the eagle in line with the shoulder seam and the head in the direction of the back. The shoulder loop when buttoned shall not bulge or twist. Hand sewn buttons shall be tacked with not less than two stitches and the thread shall be hidden.	301 or 101 or Hand or 801 (see figure 3)		14-16 per button 14-16 per button 4 double thread per button 12 (min) per button	30 30 30 4 (nylon)	30	

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T19:20Z
Check the source to verify that this is the current version before use.

3.8 Measurements. The finished measurements of the coat shall conform to the measurements shown in table III. The tolerance for all measurements shall be + 1/2 inch (13 mm), except that for the sweep measurement, the tolerance shall be + 3/4 inch (19 mm).

TABLE III. Measurements in inches (mm)

	Size (average) 1/						
	8	10	12	14	16	18	20
Cross back	13-1/4	13-3/4	14-1/4	14-3/4	15-1/4	15-3/4	16-1/4
(mm)	(340)	(350)	(360)	(370)	(390)	(400)	(410)
Half waist	13-1/2	14-1/4	15	15-3/4	16-1/2	17-1/2	18-1/2
(mm)	(340)	(360)	(380)	(400)	(420)	(440)	(470)
Sweep	39	41	43	45	47	49	51
(mm)	(990)	(1040)	(1090)	(1140)	(1190)	(1240)	(1300)
Back length:							
X-short	23-1/4	23-1/4	23-3/4	24	24-1/4		
(mm)	(590)	(597)	(603)	(610)	(616)		
Short	24-1/4	24-1/2	24-3/4	25	25-1/4	25-1/2	25-3/4
(mm)	(616)	(622)	(629)	(635)	(640)	(647)	(654)
Regular	25-1/4	25-1/2	25-3/4	26	26-1/4	26-1/2	26-3/4
(mm)	(641)	(647)	(654)	(660)	(667)	(673)	(679)
Long	26-1/2	26-3/4	27	27-1/4	27-1/2	27-3/4	28
(mm)	(673)	(679)	(686)	(692)	(699)	(705)	(711)
Sleeve length:							
X-short	20-1/2	20-3/4	21	21-1/4	21-1/2		
(mm)	(521)	(527)	(533)	(540)	(546)		
Short	21-3/4	22	22-1/4	22-1/2	22-3/4	23	23-1/4
(mm)	(552)	(559)	(565)	(571)	(578)	(584)	(590)
Regular	23	23-1/4	23-1/2	23-3/4	24	24-1/4	24-1/2
(mm)	(584)	(590)	(597)	(603)	(610)	(616)	(622)
Long	24-1/2	24-3/4	25	25-1/4	25-1/2	25-3/4	26
(mm)	(622)	(629)	(635)	(641)	(648)	(654)	(660)

1/ The measurements for the plus (+) sizes are the same as the average measurements except that the waist is 1/2 inch (13 mm) larger and the sweep is 2 inches (51 mm) longer.

Source: https://assist.dla.mil -- Downloaded: 202610-21T19:20Z
Check the source to verify that this is the current version before use.

3.8.1 Method of measuring. The coat shall be buttoned, placed flat upon a table, and measured from folded edge to folded edge unless otherwise indicated.

Cross back:	Four and one-half inches (110 mm) below neck edge of undercollar (may be measured on form) from sleeve setting seam to sleeve setting seam.
Half waist:	From the lowest button to 1 inch (25 mm) above.
Sweep:	Along bottom edge with the coat open; measure from left front edge to right front edge.
Back length:	Along center back seam from neck edge of undercollar to bottom of coat.
Sleeve length:	Down center of sleeve from sleeve setting seam at shoulder to bottom of sleeve.

3.9 Workmanship. The finished coat shall conform to the quality and grade of product established by this specification. The occurence of defects shall not exceed the applicable point value or defect limit.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Quality conformance inspection.

4.2.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be inspected in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

4.2.2 End item examination. Sampling and examination of the end item shall be performed in accordance with the provisions of MIL-STD-1608.

5. PACKAGING

5.1 Preservation-packaging. Preservation-packaging shall be level A or C as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:20Z
Check the source to verify that this is the current version before use.

5.1.1 Level A.

5.1.1.1 Folding. Each buttoned coat shall be laid back down and a paperboard insert conforming to figure 2 placed in the coat so as to fit into the collar and shoulder area. The width of the insert may be reduced to accommodate the smaller size coats. Fold in the sleeves so that the ends rest over the pockets. The bottom shall be folded up over the front so that the folded coat measures not more than 19 by 16-1/2 inches (483 by 419 mm).

5.1.1.2 Intermediate packaging. Five folded coats of one type, class, and size only, stacked one on another and alternated collar to bottom, shall be placed in an intermediate fiberboard box conforming to style FTC, type CF, variety SW, class domestic, grade 175 of PPP-B-636. Inside dimensions of the box shall be 19 inches (483 mm) in length, 16-1/2 inches (419 mm) in width and 3-3/4 inches (95 mm) in depth. Three ounces (85 g) of naphthalene flakes shall be uniformly distributed throughout the contents of each box except when coats are made from cloth pre-treated with moth repellent. The box closure shall be secured with 3-inch (76 mm) minimum width gummed paper tape conforming to type III, grade B of PPP-T-45, applied at the center of each length opening and extending at least 3 inches (76 mm) along the bottom and up each side at least 3 inches (76 mm).

5.1.2 Level C. Coats shall be preserved-packaged to afford adequate protection against deterioration and physical damage during shipment from the supply source to the first receiving activity. The package and the quantity per package shall be the same as that normally used by the contractor for retail distribution.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.2.1. Level A packing. Twenty coats of one type, class, and size only, preserved-packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC, grade V2s of PPP-B-636. Level A packages shall be packed flat four in depth with a shipping container. Inside dimensions of each shipping container shall approximate 21 inches (533 mm) in length, 18-1/2 inches (470 mm) in width, and 17 inches (432 mm) in depth. Approximate dimensions are furnished as a guide only. Each shipping container shall be closed in accordance with method III, waterproofed in accordance with method V, and reinforced as specified in the appendix of PPP-B-636. Toward the end of the contract or when there are less than the required amount per container of the same size, mixed sizes of the same type and class may be packed within the same container.

Source: https://assist.dla.mil -- Downloaded: 202610-21T19:20Z
Check the source to verify that this is the current version before use.

5.2.2 Level B packing. Twenty coats of one type, class, and size only, preserved-packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC, type CF (variety SW) or SF, class domestic, grade 275 of PPP-B-636. Level A packages shall be packed flat four in depth within the shipping container. Inside dimensions of the shipping container shall approximate 21 inches (533 mm) in length, 18-1/2 inches (471 mm) in width, and 17 inches (432 mm), in depth. Approximate dimensions are furnished as a guide only. Each shipping container shall be closed in accordance with method II as specified in the appendix of PPP-B-636. Toward the end of the contract or when there are less than the required amount per container of the same size, mixed sizes of the same type and class may be packed within the same container.

5.2.2.1 Weather-resistant fiberboard containers. When specified (see 6.2), the shipping container shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with method III as specified in the appendix of PPP-B-636.

5.2.3 Level C packing. Coats, preserved-packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Containers shall be in accordance with Uniform Freight Classification or National Motor Freight Classification as applicable.

5.3 Marking. In addition to any special marking required by the contract or order, intermediate packages and shipping containers shall be marked in accordance with MIL-STD-129.

5.3.1 Labels, mixed sizes. Each shipping container, packed with mixed sizes of the same type and class, shall have securely attached to the end and side, directly under the printing or stenciling, a white paper label 5 by 4 inches (127 by 102 mm) with the words "MIXED SIZES" plainly printed or stamped thereon, and under these words shall be legibly printed or stamped the correct quantity and sizes contained therein.

6. NOTES

6.1 Intended use. The coats are for wear by female personnel of the Department of the Army as part of the service uniforms.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Type, class, and size required (see 1.2).
(c) Selection of applicable levels of preservation-packaging and packing (see 5.1 and 5.2).
(d) When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).

Source: https://assist.dla.mil -- Downloaded: 202610-21T19:20Z
Check the source to verify that this is the current version before use.

6.3. Samples. For access to samples, address the procuring activity issuing the invitation for bids.

* 6.4 Nylon thread. The particular nylon thread chosen should perform satisfactorily under mass production conditions in each of the operations for which it is allowed. Thread guide and tension devices should be carefully examined, and rough or worn machine components should be replaced. High needle temperature should be avoided to prevent melting of the thread.

6.5 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:

Army - GL

Review activities:


Army - MD
DSA - CT

Preparing activity:


Army - GL

Project No. 8410-A418

Source: https://assist.dla.mil -- Downloaded: 202610-21T19:20Z
Check the source to verify that this is the current version before use.

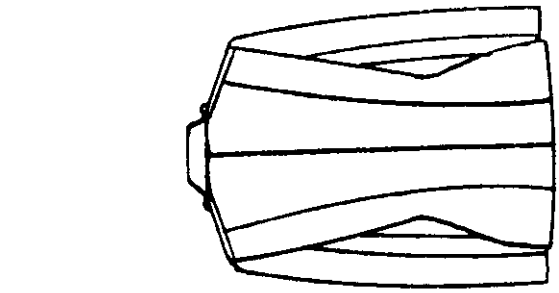

BACK

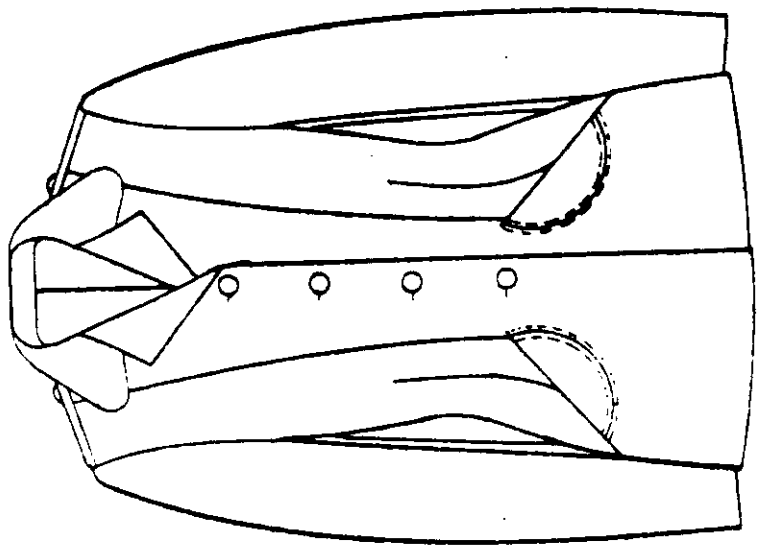


FRONT

FIG. 1 - COATS, WOMEN'S, WOOL, AND POLYESTER/WOOL

2-1-010

Source: https://assist.dla.mil -- Downloaded: 202610-21T19:20Z
Check the source to verify that this is the current version before use.

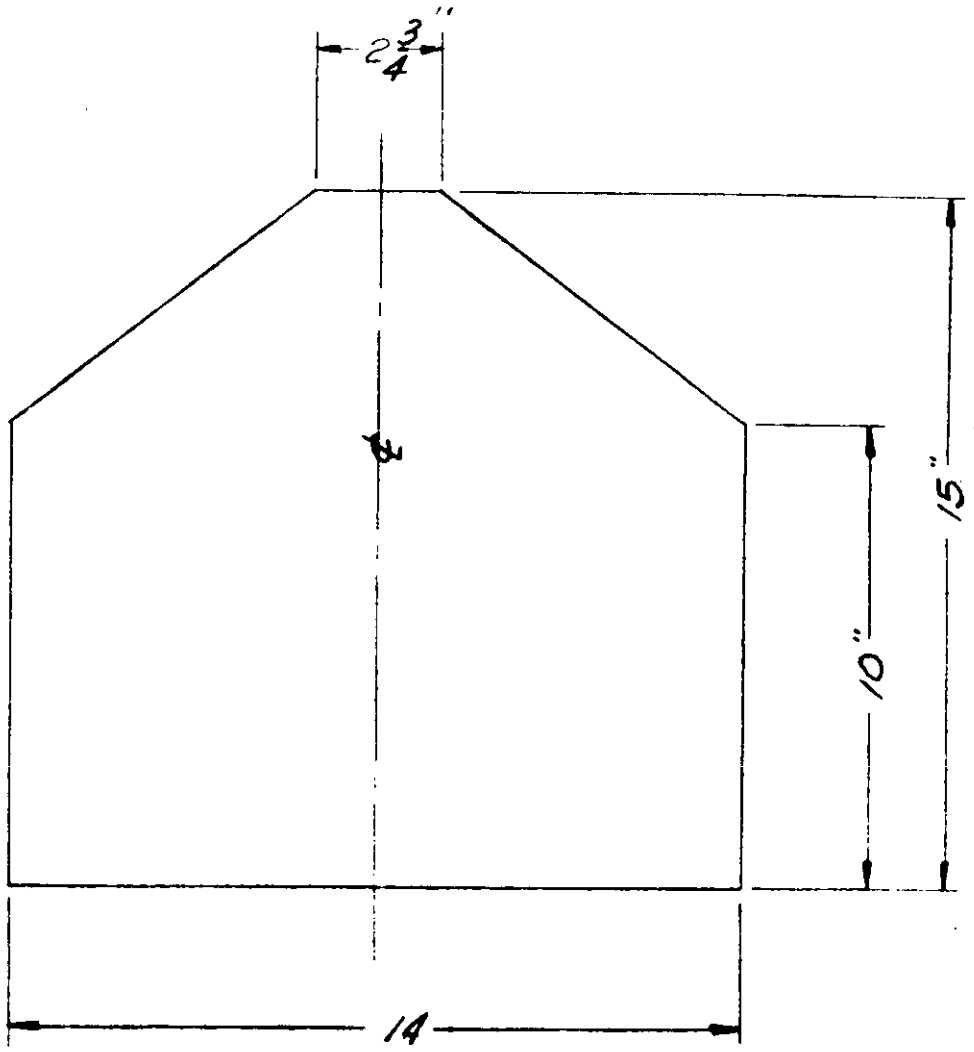


PAPERBOARD .032" THICK
ALL MEASUREMENTS ARE APPROXIMATE

FIGURE – 2 INSERT, PAPERBOARD

Source: https://assist.dla.mil -- Downloaded: 202610-21T19:20Z
Check the source to verify that this is the current version before use.

Stitch Class 800.- This class of stitch shall be formed with one or more needle threads and has for a general characteristic that the thread does not interloop with itself or any other thread or threads. The thread is passed completely through the material by means of a double pointed center eye needle and returned by another path. This class of stitch simulates hand stitching.

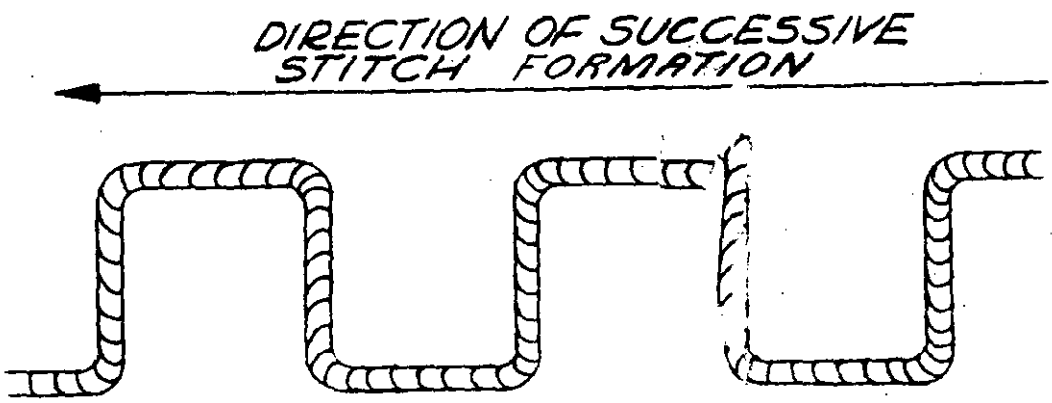

This type of stitch shall be formed with one needle thread which is passed completely through the material and returned by another path after the material has been moved forward one stitch length.

FIGURE-3-STITCH TYPE 8.01

2-1-79 B

Source: https://assist.dla.mil -- Downloaded: 202640-21T19:20Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.
NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER (Number) AND TITLE

MIL-C-40143F(GL) - Coats, Women's, Wool and Polyester/Wool

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY (Printed or typed name and address — Optional)

TELEPHONE NO.

DATE

DD FORM 1426 1 OCT 76 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:20Z
Check the source to verify that this is the current version before use.

OLD

EPARTMENT OF THE ARMY

OFFICIAL BUSINESS
NALTY FOR PRIVATE USE $300

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

BUSINESS REPLY CARD

FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Natick Research and Development Command
ATTN: DRDNA-13
Natick, MA. 01760

LD

Source: https://assist.dla.mil -- Downloaded: 202610-21T19:20Z
Check the source to verify that this is the current version before use.