INCH-POUND

MIL-D-40099H
26 January 1989
SUPERSEDING
MIL-D-40099G
15 December 1981

MILITARY SPECIFICATION

DRAWERS, MEN'S, BOXER STYLE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers men's cotton and polyester and cotton boxer style drawers.

1.2 Classification. The drawers shall be of the following types, classes, and sizes as specified (see 6.2):

Type I - Cotton, muslin cloth

Class 1 - White
Class 2 - Olive Green 107
Class 3 - Brown 436

Type II - Polyester and cotton cloth, white

Schedule of sizes	
26	40
28	42
30	44
32	46
34	48
36	50
38	52

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: U.S. Army Natick Research, Development, and Engineering Center, Natick, MA 01760-5014 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8420

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:15Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

A-A-50083	- Bag, Plastic, Folded Garment
V-T-276	- Thread, Cotton
JJ-W-155	- Webbing, Textile, (Cotton, Elastic)
CCC-C-446	- Cloth, Muslin, Cotton
DDD-L-20	- Label: For Clothing, Equipage, and Tentage, (General Use)
DDD-T-86	- Tape, Textile; Cotton, General Purpose (Unbleached, Bleached, or Dyed)
PPP-B-636	- Boxes, Shipping, Fiberboard

MILITARY

MIL-L-35078	- Loads, Unit: Preparation of Semiperishable Subsistence Items; Clothing, Personal Equipment and Equipage, General Specification For
MIL-C-43479	- Cloth, Broadcloth, Polyester and Cotton
MIL-T-43548	- Thread, Polyester Core: Cotton-, Rayon-, or Polyester-Covered

STANDARDS

FEDERAL

FED-STD-191	- Textile Test Methods
FED-STD-751	- Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	- Marking for Shipment and Storage
MIL-STD-147	- Palletized Unit Loads
MIL-STD-731	- Quality of Wood Members for Containers and Pallets

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:15Z
Check the source to verify that this is the current version before use.

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Naval Publications and Forms Center, (ATTN: NPODS), 5801 Tabor Avenue, Philadelphia, PA 19120-5099.)

2.2 Non-Government publications. The following document(s) form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

D 3951 - Standard Practice for Commercial Packaging

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103-1187.)

THE COLOR ASSOCIATION OF THE UNITED STATES, INC.

Standard Color Card of America

Department of Defense Standard Shades for Sewing Threads

(Color cards may be available from the Color Association of the United States, Inc., 343 Lexington Avenue, New York, NY 10016-0927. If color cards are not available from the Color Association, individual color samples may be obtained from the contracting activity or as directed by the contracting activity.)

(Non-Government standards and other publications are normally available from the organizations which prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Samples.

3.1.1 Guide samples. Guide samples, when furnished, are solely for guidance and information to the contractor (see 6.4). Variations from this specification may appear in the sample, in which case this specification shall govern.

3.1.2 First article. When specified (see 6.2), a sample shall be subjected to first article inspection (see 6.3) in accordance with 4.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:15Z
Check the source to verify that this is the current version before use.

3.2 Materials. It is encouraged that recycled material be used when practical as long as it meets the requirements of this specification.

3.2.1 Basic cloth.

3.2.1.1 Type I, classes 1, 2 and 3. The basic cloth shall be cotton muslin conforming to type III, class 3 of CCC-C-446. The cloth for the type I, class 1 drawers shall be bleached white. The cloth for the type I, class 2 drawers shall be dyed Olive Green 107. The cloth for the type I, class 3 drawers shall be dyed Brown 436.

3.2.1.2 Type II. The basic cloth shall be bleached white, polyester and cotton broadcloth conforming to type I, class 1 of MIL-C-43479.

3.2.2 Thread. The cotton thread for seaming and stitching the drawers shall conform to the requirements of V-T-276, as follows:

Drawers	Thread type	Ticket number	Ply
Type I, class 1 and type II	IA2	50	3
	IA2	70	2
Type I, classes 2 and 3	IA3	50	3
	IA3	70	2

As an alternate, cotton-, rayon-, or polyester-covered polyester core thread conforming to ticket No. 100, 2 or 3 ply of MIL-T-43548 or 175 denier, single ply textured polyester thread with a minimum breaking strength of 1.4 pounds may be substituted.

3.2.2.1 Color. The thread for type I, class 1 and type II shall be white. The thread for type I, class 2 drawers shall be dyed shade Olive Drab S-1, C.A. 66022. The color of the thread for type I, class 3 drawers shall be Khaki P-1, C.A. 66019.

3.2.2.1.1 Colorfastness. The dyed thread shall show fastness to laundering (after 3 cycles) equal to or better than the standard sample. When no standard sample is available, the dyed thread shall show "good" fastness to laundering (after 3 cycles).

3.2.3 Label. Each pair of drawers shall be marked with an identification and size label conforming to type III or IV, class 4 of DDD-L-20. The colorfastness requirements to laundering shall apply.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:15Z
Check the source to verify that this is the current version before use.

3.2.3.1 Instruction label (classes 2 and 3 only). The instruction label for the type I, classes 2 and 3 drawers shall conform to type VI, class 4 of DDD-L-20 and contain the following information:

INSTRUCTION LABEL

Launder using permanent press cycle or hand wash with warm water. Tumble dry using permanent press cycle or drip dry on a rustproof hanger. Do not use chlorine bleach. Do not remove this label. Use of acne medicine containing benzoyl peroxide will cause discoloration.

3.2.4 Webbing.

3.2.4.1 Webbing, cotton, elastic. The elastic webbing shall conform to type I, class 28 of JJ-W-155. The webbing shall be white for type I, class 1 and type II; Olive Drab 7 for type I, class 2; and Brown 436 for type I, class 3. The requirement for colorfastness to weathering shall not apply.

3.2.4.2 Webbing, polyester, elastic, knitted. As an alternate to the cotton elastic webbing, a knitted polyester webbing for the waistband shall conform to the requirements of table I. The knitted polyester webbing shall be knit on a knitting machine having a needle width of 19. Four sewing channels shall be formed by having those needles free from any warp yarns or elastomers. The sewing channels shall be evenly spaced among each other within the full width of the webbing.

TABLE I. Physical requirements for knitted polyester elastic webbing

Characteristic	Requirement
Width, inch	1-1/4 ± 1/16
Weight, oz/linear yard	0.50 (min.)
Elastomer ends	15 (min.)
Elastomer gage	36 (maximum fineness)
Picks per inch	40 (min.)
Warp ends	15 (min.)
Filler yarns	8 ends
Yarn size:	
Warp, nominal	1/150 semi-dull polyester
Filling, nominal	1/150 semi-dull polyester
Tension @ 50% elongation with a 25 lb. carriage load:	
Initial, lb.	1.15 to 1.75
After accelerated aging (oven method)	Not greater than 20% difference from initial tension

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:15Z
Check the source to verify that this is the current version before use.

3.2.5 Tape. The cotton tape for covering the raw ends of the elastic webbing, when the ends are caught in the back seam shall be 1/2 inch in width and shall conform to type I, class 2 (for white drawers) or class 3 (for dyed drawers) of DDD-T-86. The color of the tape shall be white for type I, class 1 and type II drawers; Olive Drab 7 for type I, class 2 drawers; and Brown 436 for type I, class 3 drawers.

3.2.5.1 Colorfastness. The dyed tape for classes 2 and 3 drawers shall show fastness to laundering (after 3 cycles) equal to or better than the standard sample. When no standard sample is available, the dyed tape shall show "good" fastness to laundering (after 3 cylces).

3.3 Design. The drawers shall be thigh length, boxer style drawers with rectangular back panel, cut-on fly and elastic waistband (see figure 1).

3.4 Patterns. The pattern parts for the front and rectangular back panel shall be furnished and graded by the manufacturer, with the finished measurements of table II being maintained. The seam allowance for double-lapped and double-stitched seams shall be 1/2 inch. The right and left fronts may be of two pieces providing uniformity of gore pieces is maintained.

3.5 Construction.

3.5.1 Stitches, seams, and stitching. Stitches, seams, and stitching types, as specified in table II, shall conform to FED-STD-751. Whenever two or more methods of seams or stitches are given for the same part of the operation, any one of them may be used. Seams shall be sewn so that no raw edges, run-offs, twists, puckers, or open seams will result. Where stitch type 401 is used, the looper (underthread) shall be on the inside of the drawers. The gage of stitching for double-stitched seams shall be 3/16 to 1/4 inch, unless otherwise specified herein. All seams shall start and finish evenly. Thread tension shall be maintained so that there will be no excessively tight or loose stitching.

3.5.1.1 Type 301 stitching. Ends of all stitching shall be backstitched or overstitched not less than 1/2 inch except where ends are turned under or caught in other seams or stitching. Thread tension shall be maintained so that there will be no loose stitching resulting in loose bobbin or top thread or excessively tight stitching resulting in puckering of the materials sewn. The lock shall be imbedded in the materials sewn.

3.5.1.1.1 Repairs of type 301 stitching. Repairs of type 301 stitching shall be as follows:

a. When thread breaks or bobbin run-outs occur during stitching, the stitching shall be repaired by restarting the stitching a minimum of 1/2 inch back of the end of the stitching. 1/

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:15Z
Check the source to verify that this is the current version before use.

b. Thread breaks or two or more consecutive skipped or run-off stitches noted during inspection of the item shall be repaired by overstitching. The stitching shall start a minimum of 1/2 inch in back of the defective area, continue over the defective area a minimum of 1/2 inch beyond the defective area onto the existing stitching. Loose or excessively tight stitching shall be repaired by removing the defective stitching without damaging the materials and restitching in the required manner. 1/

1/ When making the above repairs, the ends of the stitching are not required to be backstitched.

3.5.1.2 Type 401 stitching. Thread tension shall be maintained so that there will be no loose stitching. All repairs shall be in accordance with 3.5.1.1.1.a and b. Repairs to stitch type 401 may be accomplished by use of stitch type 301.

3.5.2 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in table II.

3.5.3 Bartacks. Bartacks shall measure 1/2 to 5/8 inch long. Bartacking shall be free from thread breaks and loose stitching.

3.5.4 Automatic stitching. Automatic stitching machines may be used to perform any of the required stitch patterns provided the requirements of the stitch pattern, stitches per inch, size and type of thread are met, and at least three or more tying, overlapping, or backstitches are used to secure the ends of the stitching.

3.6 Manufacturing operations requirements. The drawers shall be manufactured by and with the use of all operations specified in table II. All stitching wherever possible shall be on the face of the material. The contractor is not required to follow the exact sequence of operations. Any additional basting or holding stitching may be used provided the threads are not visible on the finished drawers.

3.6.1 Figure. Figure 1 is furnished for information purposes only. To the extent of any inconsistencies between the written document and the figure the written document shall govern.

3.6.2 Marking or bundling. The component parts of the drawers shall be marked or bundled to insure a uniform shade (type I, class 2 and 3 drawers) and size throughout the drawers. Any method of marking may be used except:

a. Corrosive metal fastening devices.

b. Sew-on type markings.

c. Adhesive type tickets which leave traces of paper or adhesive upon removal of the tickets.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:15Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
1.	Cutting. a. The fronts and back may be cut in the warp or filling direction. The direction of the cut for fronts shall be consistent in each pair of drawers. The directional line of front may vary from the warp or filling direction by not more than 1-1/4 inches from the selvage edge of the fabric. Measurements shall be taken from the top and bottom of the direction line on pattern that is parallel to the selvage edge of the fabric; and the difference between the two measurements shall not exceed the tolerance specified. b. All component parts shall be cut from one piece of material. (Applicable to type I, class 2 and 3 drawers.) c. Cut the elastic webbing (relaxed position) in continuous lengths for each respective size (see 6.5). d. Cut the tape for covering raw ends of elastic webbing in 1-5/8 to 1-3/4 inch lengths for all sizes of drawers when alternate operation 8.a (2) is used.						
2.	Replacement of defective components. During the spreading, cutting, and manufacturing process, components having material defects or damages that are classified as defects in 4.4.3 shall be removed from production and replaced with non-defective and properly matched components.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil - Downloaded: 2026-10-21T19:15Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
3.	Marking or bundling (see 3.6.2).						
	Mark or bundle all component parts of the drawers to insure a uniform shade (type I, class 2 and 3 drawers) and size throughout the drawers.						
4.	Join fronts to back.						
	a. Join fronts to back with double-lapped and double-stitched seams. The back shall lap the fronts.	301 or 401	LSc-2 LSc-2	12-14 12-14	50-3 50-3	50-3 70-2	
	or						
	b. When gores are used, join gores to fronts and back with double-lapped and double-stitched seams. The gores shall lap the fronts and the back shall lap the gores.	301 or 401	LSc-2 LSc-2	12-14 12-14	50-3 50-3	50-3 70-2	
5.	Attach elastic webbing and make flies.						
	Finished appearance. The elastic webbing shall be stitched to the top of drawers with the fullness distributed evenly and the four rows of stitching shall be 5/16 ± 1/16 inch apart with the outside rows of stitching 1/8 ± 1/16 inch from edges of webbing. Stitching shall be confined to the elastic sewing channels and shall not intersect with the elasticized ends.						
	a. Turn in top edge of drawers 1/2 ± 1/8 inch.	1					

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:15Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
5.	Attach elastic webbing and make flies. (cont'd)						
	b. Place one end of elastic webbing 2-3/4 ± 1/4 inches from front edge of left front. Place the opposite end of elastic webbing 1-3/4 ± 1/4 inches from front edge of right front. The top folded edge of drawers shall extend not more than 1/8 inch above top edge of elastic webbing.						
	c. Stitch elastic webbing to drawers with four rows of stitching. All rows of stitching shall extend the full width of the cut-on facings.	301 or 401	SSt-4 SSt-4	10-12 10-12	50-3 50-3	50-3 70-2	
	or						
	d. See operation 8 for alternate methods of attaching elastic webbing.						
	e. Turn in right fly with the raw edge turned in 3/4 ± 1/8 inch and stitch 1/16 to 1/8 inch from back edge through front from top of waist to top of crotch seam, folding bottom end at crotch diagonally with the raw edge turned under. The fly shall finish 3/4 ± 1/8 inch wide.	301	EFb-1	12-14	50-3	50-3	
	f. Turn in left fly with the raw edge turned in 3/8 ± 1/16 inch folding in bottom diagonally and stitch 1/16 to 1/8 inch from top and back edges through front to top of crotch seam. The fly shall finish 1-1/2 ± 1/8 inches wide.	301	EFb-1	12-14	50-3	50-3	
	or						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:15Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
5.	Attach elastic webbing and make flies. (cont'd)						
	g. Turn in left fly with the raw edge turned in 3/8 ± 1/16 inch folding in bottom diagonally and stitch 1/16 to 1/8 inch from top and back edges through front to top of crotch seam. Stitching may continue to the bottom of crotch, turning edges of left crotch seam allowance to the inside 1/4 ± 1/16 inch at inseam, tapering to nothing. The fly shall finish 1-1/2 ± 1/8 inches wide.	301 or 401	EFa-1	12-14	50-3 50-3	50-3 70-2	
6.	Join crotch seam.						
	a. Turn crotch seam allowance of the right front to the outside 1/4 inch at inseam tapering to nothing at base of fly and single stitch 1/16 to 1/8 inch from folded edge.	301 or 401	LSdc-3(a) LSdc-3(a)	12-14 12-14	50-3 50-3	50-3 70-2	
	b. Turn edge of left front crotch seam allowance to the inside 1/4 inch at inseam tapering to nothing at base of fly, superimposed on right front crotch and double stitch catching the right front crotch seam with both rows of stitching. The outer row of stitching shall be continued along folded edge of fly 1-1/2 ± 1/4 inches, across fly 3/4 ± 1/8 inch, and down to inner row of double stitching forming a triangle catching ends of fly. The gage of double stitching shall be 3/16 to 1/4 inch with outer row of stitching 1/16 to 1/8 inch from folded edge.	301 or 401	LSdc-3(b) LSdc-3(b)	12-14 12-14	50-3 50-3	50-3 70-2	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:15Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
6.	Join crotch seam. (cont'd)						
	or						
	c. Turn edge of left front crotch (if not pre-stitched per operation 5.f alternate) seam allowance to the inside 1/4 ± 1/16 inch at inseam tapering to nothing at the base of fly, superimposed on right crotch and stitch with single row of stitching 1/16 to 1/8 inch from the folded edge at the bottom of crotch, continue stitching 1-1/2 ± 1/4 inches above the base of the crotch, across fly 3/4 ± 1/8 inch and down forming a second row of stitching 3/16 to 1/4 inch from the first row of stitching.	301 or 401	LSdc-3(b) LSdc-3(b)	12-14 12-14	50-3 50-3	50-3 70-2	
	or						
	d. In lieu of the triangular stitching, the crotch seam double stitching shall be continued along folded edge of fly to 1-1/2 ± 1/4 inches above fly base.	301		12-14	50-3	50-3	
	e. Place a horizontal bartack at end of fly opening catching the ends of double stitching.	Bartack		28 per bartack	50-3	50-3	
7.	Finish top of fly opening.						
	Finished appearance. The fly opening shall finish smooth and flat with the top ends even.						
	a. Place edge of left fly over right fly 3/4 ± 1/8 inch and stitch across top; continue stitching down 2-1/4 ± 1/4 inches catching the edge of the right fly, and across bottom and up front. The stitching along front and top edges shall be 1/16 to 1/8 inch from edge.	301	LSa-1	12-14	50-3	50-3	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:15Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
7.	Finish top of fly opening. (cont'd)						
	or						
	b. When alternate operation 8 is utilized, the top and bottom lines of the box stitching may be continued across the full width of left fly and along back edge superimposed on fly stitching.						
8.	Alternate operation for attaching elastic webbing (see operation 5.d).						
	The elastic webbing may be stitched to the drawers with the ends of webbing ending at center back or caught in the seaming that joins left front or gore (when applicable) to back:						
	a. When ends of webbing finish at center back (1 inch off center tolerance) between drawers and webbing:						
	(1) Join ends of webbing 1/4 to 3/8 inch from edges.	301 or 401	SSa-1 SSa-1	12-14 12-14	50-3 50-3	50-3 70-2	
	(2) Spread seam allowances open and stitch along all edges.	301 or 401	SSa-1 and SSz-3-(b) SSa-1 and SSz-3(b)	12-14 12-14	50-3 50-3	50-3 70-2	
	or						
	(3) Turn seam allowances to one side to be caught in the stitching of webbing to drawers.						

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:15Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
8.	Alternate operation for attaching elastic webbing (see operation 5.d). (cont'd)						
	b. When ends of webbing finish in the left back joining seam, the raw ends of webbing shall be covered with cotton tape with raw ends turned in and bartacked at each end the width of the tape.	Bartack		28 per bartack	50-3	50-3	
9.	Join inseams.						
	Join inseams in one continuous operation with a double-lapped and double-stitched seam. The fronts shall lap the back.	301 or 401	LSc-2 LSc-2	12-14 12-14	50-3 50-3	50-3 70-2	
10.	Hem bottom.						
	Turn in leg bottoms 3/8 to 1/2 inch with the raw edges turned in and single stitch 1/16 to 1/8 inch from edges.	301	EFb-1	12-14	50-3	50-3	
11.	Attach labels.						
	a. Attach combination identification and size label on the inside center of back elastic just below the top edge of the waistband of the drawers. The label shall be attached to the elastic webbing by securely stitching all four sides 1/16 to 1/8 inch from the edges of the label.	301	SSa-1	10-14	70-3	70-3	
	b. Attach instruction label to the left or right side of the identification and size label just below the top edge of the waistband of the drawers. The label shall be attached to the elastic webbing by securely stitching all four sides 1/16 to 1/8 inch from the edges of the label.	301	SSa-1	10-14	70-3	70-3	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:15Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
12.	Clean drawers. a. Trim all thread ends and remove loose threads. b. Remove all spots, stains, and markings.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:15Z
Check the source to verify that this is the current version before use.

3.7 Finished measurements. The finished measurements for the drawers shall conform to the requirements shown in table III. The drawers to be measured shall be laid out flat without tension on a smooth flat surface.

TABLE III. Sizes and measurements (in inches)

Size	1/2 Waist (relaxed) 1/	1/2 Waist (stretched) 2/	Total length 3/	Front rise 4/	Back rise combined 5/	Width across inseam 6/	Leg bottom 7/	Fly opening 8/	Thigh 9/
26	10	16-1/2	16-1/4	12	18-1/4	11-1/2	11-1/2	6-1/2	13-1/2
28	11	17-1/2	16-1/2	12-1/4	18-1/2	11-1/2	12	6-3/4	14
30	12	18-1/2	16-3/4	12-1/2	18-3/4	11-1/2	12-1/2	7	14-1/2
32	13	19-1/2	17	12-3/4	19	11-1/2	13	7-1/4	15
34	14	20-1/2	17-1/4	13	19-1/4	11-1/2	13-1/2	7-1/2	15-1/2
36	15	21-1/2	17-1/2	13-1/4	19-1/2	11-1/2	14	7-3/4	16
38	16	22-1/2	17-3/4	13-1/2	20	11-1/2	14-1/2	8	16-1/2
40	17	23-1/2	18	13-3/4	20-1/2	11-1/2	15	8-1/4	17
42	18	24-1/2	18-1/4	14	21	11-1/2	15-1/2	8-1/2	17-1/2
44	19	25-1/2	18-1/2	14-1/4	21-1/2	11-1/2	16	8-3/4	18
46	20	26-1/2	18-3/4	14-1/2	22	11-1/2	16-1/2	9	18-1/2
48	21	27-1/2	19	14-3/4	22-1/2	11-1/2	17	9-1/4	19
50	22	28-1/2	19-1/4	15	23	11-1/2	17-1/2	9-1/2	19-1/2
52	23	29-1/2	19-1/2	15-1/4	23-1/2	11-1/2	18	9-3/4	20
Tol.	± 1/2	Minimum	± 1/4	± 1/4	± 1/4	± 1/2	± 1/4	± 1/4	± 1/2

1/ 1/2 Waist (relaxed). Measured from side to side along top edge of waist (A, figure 1).

2/ 1/2 Waistband (stretched). Measured from side to side along top edge of waist with waistband stretched taut in straight line using manual tension.

3/ Total length. Measured from top edge of waist to lower edge of leg (C, figure 1).

4/ Front rise. Measured from bottom of crotch, including width of a seam, up front of drawers to top edge of waist (D, figure 1).

5/ Back rise. Measured from bottom of crotch, including width of seam, up back of drawers to top edge of waist at center (E plus F, figure 1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:15Z
Check the source to verify that this is the current version before use.

6/ Width across inseam. Measured from inside corner of one leg to other leg. Legs spread and inseam measured in straight line (G, figure 1).

7/ Leg bottom. Measured across leg along lower edge (H, figure 1).

8/ Fly opening. Measured from top of fly opening to bottom of fly opening (I, figure 1).

9/ Thigh. Measured from bottom of crotch seam across leg parallel to lower edge of leg to outside edge (J, figure 1).

3.8 Workmanship. The end item shall conform to the quality of product established by this specification and the occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.1.2 Responsibility for dimensional requirements. Unless otherwise specified in the contract or purchase order, the contractor is responsible for ensuring that all specified dimensions have been met. When dimensions cannot be examined on the end item, inspection shall be made at any point, or at all points in the manufacturing process necessary to assure compliance with all dimensional requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:15Z
Check the source to verify that this is the current version before use.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).

4.3 First article inspection. When a first article is required (see 3.1.2 and 6.2), it shall be examined for the defects specified in 4.4.3 and 4.4.4.

4.4 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be performed in accordance with MIL-STD-105.

4.4.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced documents unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

4.4.2 Component testing. The polyester elastic webbing shall be tested for the characteristics listed in table IV. The methods of testing specified in FED-STD-191 wherever applicable and as listed in table IV shall be followed. The sample unit shall be 1 yard. Any test failure shall be cause for rejection of the lot. The sample size shall be in accordance with the following:

Lot size (yards)	Sample size (number of sample units)
800 or less	2
801 up to and including 22,000	3
22,001 and over	5

TABLE IV. Polyester elastic webbing tests

Characteristic	Requirement paragraph	Test method
Construction	3.2.4.2	Visual
Width	3.2.4.2	Visual
Weight	3.2.4.2	5041
Elastomer ends	3.2.4.2	5050
Elastomer gage	3.2.4.2	1/
Picks per inch	3.2.4.2	5050
Warp ends	3.2.4.2	5050
Filler yarns	3.2.4.2	Visual
Yarn size	3.2.4.2	1/
Tension:		
Initial	3.2.4.2	2/
After accelerated aging	3.2.4.2	2/

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:15Z
Check the source to verify that this is the current version before use.

1/ Unless otherwise specified, a certificate of compliance shall be submitted and will be accepted for the stated requirement.

2/ Applicable test method cited in JJ-W-155.

4.4.3 End item visual examination. The end items shall be examined for the defects listed in table V. The lot size shall be expressed in units of drawers. The sample unit shall be one pair of drawers. The inspection level shall be II and the acceptable quality level (AQL), expressed in terms of defects per hundred units, shall be 2.5 for major defects, 15.0 for major and minor A combined defects, and 25.0 for total (major, minor A, and minor B combined) defects.

TABLE V. End item visual defects

Examine	Defect	Classification Major	Minor A	Minor B
Material defects and damages	a. Any weakening defect such as a smash, multiple float, hole.	101		
	b. Any hole, cut, tear, mend, burn or needle chew.	102		
	c. Any slub greater than an F on the sears fabric defect scale.		201	
Shaded parts	Any outside part shaded.		202	
Cleanness	a. Any spot or stain on outside.		203	
	b. Thread ends not trimmed or loose threads not removed throughout drawers.			301
	c. One or more shade or size markings not removed, when applicable.			302
	d. Any holding or basting threads visible on finished drawers.			303

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:15Z
Check the source to verify that this is the current version before use.

TABLE V. End item visual defects (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Components and operations	a. Any component part or required operation omitted (unless otherwise classified herein).	103		
	b. Any operation not performed as specified (unless otherwise classified herein).			304
Cutting	Any component part not cut in conformance with directional lines indicated on pattern or not cut in accordance with specification requirements.	104		
Seams and stitching	a. Accuracy of seaming:			
	1. Part of drawers caught in any unrelated operation or stitching.	105		
	2. Seams twisted, puckered, or pleated.		204	
	3. Ends of all stitching (when not caught in other seams or stitching) backtacked or backstitched less than 1/2 inch.			305
	4. Thread breaks (all stitch types) stitched less than 1/2 inch beyond each end of break.			306
	5. Ends of a continuous line of stitching not overlapped or overlapped less than 1/2 inch.		205	
	6. Various shades of thread used on outside of same drawers.		206	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:15Z
Check the source to verify that this is the current version before use.

TABLE V. End item visual defects (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Seams and stitching (cont'd)	b. Gage of stitching			
	1. Irregular, i.e., unevenly gaged or corresponding stitchings not uniformly gaged (to be scored when condition exists along major portion of seam).			307
	2. Width not as specified or not within range of gage specified or varies more than 1/16 inch when no range is specified.			308
	3. Edge of raise stitching sewn too close to edge, resulting in damage to cloth.	106		
	4. Gage of double stitching less than 3/16 or more than 1/4 inch.		207	
	c. Raw edges:			
	1. On outside:			
	- 1/8 to 1/4 inch inclusive.			309
	- more than 1/4 up to 1 inch inclusive.		208	
	- more than 1 inch.	107		
	2. On inside:			
	- more than 1 inch but not more than 2 inches.			310
	- more than 2 inches.		209	
	d. Runoff, skipped, or broken stitches:			
	1. Edge or raise stitching:			
	- 1/4 to 1/2 inch inclusive.			311
	- more than 1/2 inch.		210	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:15Z
Check the source to verify that this is the current version before use.

TABLE V. End item visual defects (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Seams and stitching (cont'd)	2. Joining seam - when resulting in an open seam, use "Open seam" classification.			
	NOTE: Any series of missing, broken, skipped, or *run-off stitches constitute an open seam.* A double-stitched seam is considered open when either side of the seam is open.			
	e. Open seam:			
	- up to 1/4 inch inclusive.			312
	- more than 1/4 to 3/4 inch inclusive.		211	
	- more than 3/4 inch.	108		
	f. Seam and stitch types:			
	1. Not specified seam or stitch type.		212	
	2. Looper thread of 401 stitch type finishing on outside of drawers.	109		
	g. Stitch tension:			
	1. Loose tension resulting in a loose seam.	110		
	2. Loose tension on edge, raise, or double stitching resulting in a loosely exposed bobbin or top thread.		213	
	3. Tight tension (stitches break when normal strain is applied to the seam or stitching).	111		

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:15Z
Check the source to verify that this is the current version before use.

TABLE V. End item visual defects (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Seams and stitching (cont'd)	NOTE: Puckering is evidence of tight tension. When puckering is evident, seam shall be tested by exerting pull in lengthwise direction of the seam or stitching.			
	h. Stitches per inch:			
	1. More than specified.			313
	2. Less than specified:			
	- one or two stitches.			314
	- three stitches.		214	
	- more than three stitches.	112		
Bartacks	a. One or more missing, insecure, or misplaced not serving intended purpose		215	
	b. Less than 1/2 or more than 5/8 inch in length.		216	
Front and back panel	a. Back panel not lapped on fronts.			315
	b. Gore panels not lapped on fronts, or center back panel not lapped on gore panels (when applicable).			316
Elastic waistband	a. Fullness not evenly distributed in stitching elastic webbing to top of drawers.			317
	b. Top folded edge of drawers extending more than 1/8 inch above top edge of webbing or not extending above top edge of webbing.			318
	c. Elastic webbing stitched to top of drawers with less than four rows of stitching.		217	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:15Z
Check the source to verify that this is the current version before use.

TABLE V. End item visual defects (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Elastic waistband (cont'd)	d. Outside rows of stitching less than 1/16 inch or more than 3/16 inch from edges of elastic webbing.			319
	e. Gage of stitching less than 1/4 inch or more than 3/8 inch.			320
	f. Webbing not cut in one piece.	113		
	g. All rows of stitching not extending the full width of the cut on fly.			321
	h. Three or more broken elastic strands in webbing.	114		
	i. Applicable to alternate operation 8.(a):			
	1. Ends of webbing positioned off center on back of drawers by more than 1 inch.			322
	2. Ends of elastic webbing stitched less than 1/4 inch or more than 3/8 inch from edges.			323
	3. Seam allowance at ends of elastic webbing not spread open and stitched along all edges; or not turned to one side.			324
	j. Applicable to alternate operation 8.(b):			
	1. Ends of webbing not finishing at left front back seam.			325
	2. Raw ends of webbing not covered by tape.			326
	3. Bartack not covering full width of tape.			327

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:15Z
Check the source to verify that this is the current version before use.

TABLE V. End item visual defects (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Front opening (right and left flies)	a. Width of finished right fly less than 5/8 or more than 7/8 inch.			328
	b. Width of finished left fly less than 1-3/8 or more than 1-5/8 inches.			329
	c. Left fly lapping right fly less than 5/8 or more than 7/8 inch.			330
	d. Rectangular stitching at top of fly opening not completely catching right fly, or continued down front less than 2 or more than 2-1/2 inches.		218	
	e. Top raw edge of drawers turned in less than 3/8 or more than 5/8 inch.		219	
	f. Triangular stitching at base of fly opening:			
	1. Outer row of crotch stitching continued along folded edge of left fly less than 1-1/4 or more than 1-3/4 inches, or continued across fly less than 5/8 or more than 7/8 inch.		220	
	2. Stitching not terminating in the inner row of crotch stitching.		221	
	3. Stitching not catching right fly.	115		
	g. Double row of stitching at fly opening (when applicable):			
	1. Continued along front edge less than 1-1/4 or more than 1-3/4 inches.			331
	2. Horizontal bartack not catching ends of double stitching, when applicable.		222	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:15Z
Check the source to verify that this is the current version before use.

TABLE V. End item visual defects (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Front opening (right and left flies) (cont'd)	h. Fly opening uneven in length, i.e., left fly full or not lying flat on right fly.			332
Crotch seam	Crotch seam of right front not turned to outside and stitched on edge prior to joining.		223	
Inseam	Back lapped on fronts.			333
Leg bottom hems	Width of hem (on inside of shorts) less than 3/8 or more than 1/2 inch wide.			334
Label (combination identification and size)	Omitted, incorrect, illegible, misplaced or not securely attached	116		

4.4.4 End item dimensional examination. The end items shall be examined for conformance to the dimensions specified in table III. Any dimension not within the specified tolerance shall be classified as a defect. The lot size shall be expressed in units of drawers. The sample unit shall be one pair of drawers. The inspection level shall be S-3 and the AQL, expressed in units of defects per hundred units, shall be 4.0.

4.4.5 Packaging examination. The fully packaged end items shall be examined for the defects listed below. The lot size shall be expressed in units of shipping containers. The sample unit shall be one shipping container fully packaged. The inspection level shall be S-2 and the AQL, expressed in terms of defects per hundred units, shall be 2.5.

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.
Materials	Any component missing, damaged or not as specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:15Z
Check the source to verify that this is the current version before use.

Examine	Defect
Workmanship	Inadequate application of components such as: incomplete closure of container flap, loose strapping or taping, or inadequate stapling. Bulged or distorted shipping container.
Content	Number of unit packs per container is more or less than required. Number per unit pack is more or less than required. 1/

1/ For this defect four unit packs from each container in the sample shall be examined.

4.4.6 Palletization examination. The fully packaged and palletized end items shall be examined for the defects listed below. The lot size shall be expressed in units of palletized unit loads. The sample unit shall be one palletized unit load, fully packaged. The inspection level shall be S-1, and the AQL, expressed in terms of defects per hundred units, shall be 6.5.

Examine	Defect
Finished dimensions	Length, width or height exceeds specified maximum requirements.
Palletization	Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or Commercial as specified (see 6.2).

5.1.1 Level A. Each pair of drawers shall be folded in accordance with commercial practice to approximate dimensions of 11 by 7-1/4 inches. Two pairs of folded drawers of one class and size only, with the waistbands alternated top to bottom, shall be unit packed into a snug-fitting clear polyethylene film bag conforming to A-A-50083.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:15Z
Check the source to verify that this is the current version before use.

5.1.2 Commercial. Drawers shall be preserved in accordance with ASTM D 3951.

5.2 Packing. Packing shall be level A, B, or Commercial as specified (see 6.2).

5.2.1 Level A packing. One hundred and sixty-eight pairs of drawers of one type, class, and size only, preserved as specified in 5.1, shall be packed in a fiberboard shipping container style RSC-L grade V2s of PPP-B-636. The inside of each shipping container shall be fitted with a taped box liner conforming to type CF, class weather resistant, variety DW, grade V15c of PPP-B-636. Level A unit packs shall be packed flat, 2 in length, 2 in width, and 21 in depth within a shipping container. Inside dimensions of each container shall approximate 23-1/2 inches in length, 15 inches in width, and 15 inches in depth. Approximate dimension are furnished as a guide only. Each shipping container shall be closed in accordance with method III, waterproofed in accordance with method V, and reinforced as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.4.5. Shipping containers shall be arranged in unit loads in accordance with MIL-L-35078 for the type and class of load specified (see 6.2). Strapping shall be limited to nonmetallic strapping, except for type II, class F loads.

5.2.2 Level B packing. One hundred and sixty-eight pairs of drawers of one type, class and size only, preserved as specified in 5.1, shall be packed in a fiberboard shipping container, conforming to style RSC-L, type CF (variety SW) or SF, class domestic, grade 275 of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class domestic, variety DW, grade 275 of PPP-B-636. Level A unit packs shall be packed flat, 2 in length, 2 in width, and 21 in depth within a shipping container. Inside dimensions of each shipping container shall approximate 23-1/2 inches in length, 15 inches in width, and 15 inches in depth. Approximate dimensions are furnished as a guide only. Each shipping container shall be closed in accordance with method II as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.4.5.

5.2.2.1 Weather-resistant fiberboard containers. When specified, (see 6.2), the shipping container shall be a grade V3c, V3s or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with method III as specified in the appendix of PPP-B-636, except the inspection shall be in accordance with 4.4.5.

5.2.3 Commercial packing. Drawers, preserved as specified in 5.1, shall be packed in accordance with ASTM D 3951.

5.3 Palletization. When specified (see 6.2), drawers, packed as specified in 5.2.2 or 5.2.3 shall be palletized on a 4-way entry pallet in accordance with load type Ia of MIL-STD-147. Pallet type shall be type I (4-way entry), type IV, or type V in accordance with MIL-STD-147. Pallets shall be fabricated from wood groups I, II, III, or IV of MIL-STD-731. Each prepared

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:15Z
Check the source to verify that this is the current version before use.

load shall be bonded with primary and secondary straps in accordance with bonding means K and L or film bonding means O or P. Pallet pattern shall be number 3 in accordance with the appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course.

5.4 Marking. In addition to any special marking required by the contract or purchase order, unit packs, shipping containers and palletized unit loads shall be marked in accordance with MIL-STD-129, or ASTM D 3951, as applicable.

5.4.1 Polyethylene bagged unit packs. Polyethylene bagged unit packs shall have the required identification information together with the size legibly printed or stamped in black directly on the bag across the center face or on a white paper label inserted within the bag so as to permit ready identification.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The drawers are intended for use by male personnel of the Department of Defense. The type II drawers are intended for use by Navy personnel aboard "Polaris" type submarines.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number and date of this specification.
b. Type, class, and size required (see 1.2).
c. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1 and 2.2).
d. When first article is required (see 3.1.2, 4.3 and 6.3).
e. Selection of applicable levels of preservation and packing (see 5.1 and 5.2).
f. Type and class of unit load required (see 5.2.1).
g. When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).
h. When palletization is required (see 5.3).

6.3 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of FAR 52.209. The first article should be a preproduction sample. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should include specific instructions in acquisition documents regarding arrangements for selection, inspection, and approval of the first article.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:15Z
Check the source to verify that this is the current version before use.

6.4 Samples. For access to samples, address the contracting activity issuing the invitation for bids.

6.5 Elastic webbing. It has been found that the elastic webbing cut to lengths as indicated below for each size will produce drawers with the relaxed and stretched waist measurements required in table III.

Size	Cut length of elastic webbing (inches)
26	19-1/4
28	21-1/4
30	23-1/4
32	25-1/4
34	27-1/4
36	29-1/4
38	31-1/4
40	33-1/4
42	35-1/4
44	37-1/4
46	39-1/4
48	41-1/4
50	43-1/4
52	45-1/4

6.6 Dyestuff combinations. The following is a suggested, but not mandatory, dyestuff combination for shade Brown 436:

Reactive Yellow 84
Reactive Scarlet H-EA
Reactive Blue 160

6.7 Subject term (key word) listing.

Shorts
Underwear

6.8 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:15Z
Check the source to verify that this is the current version before use.

Custodians:

Army - GL
Navy - NU
Air Force - 99

Review activities:

Army - MD
Air Force - 82
DLA - CT

User activity:


Navy - MC
Air Force - 45

Preparing activity:


Army - GL

(Project 8420-0084)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:15Z
Check the source to verify that this is the current version before use.

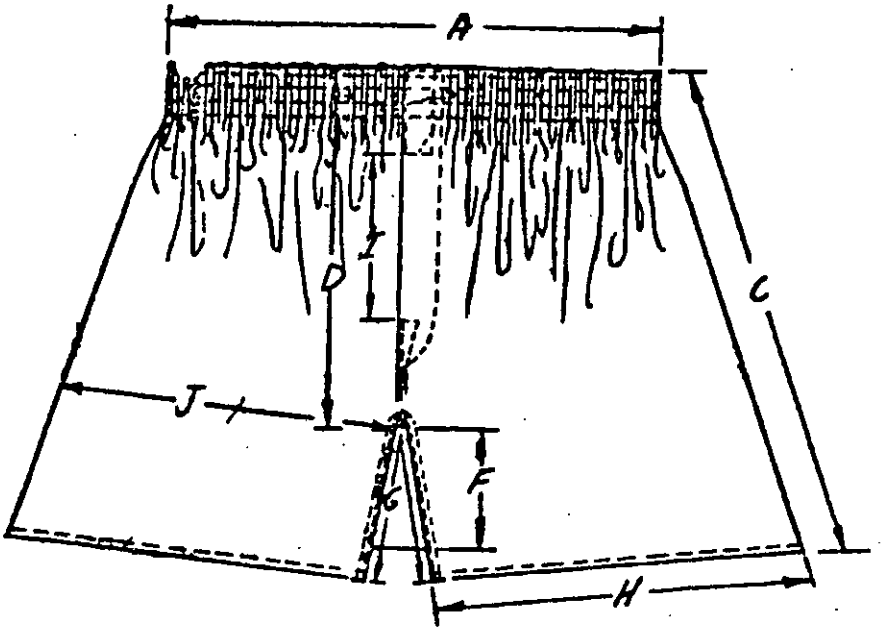

FRONT

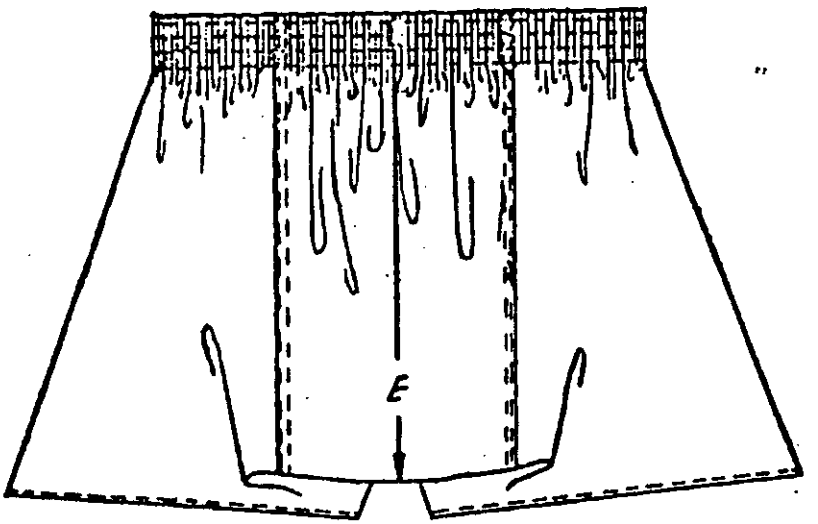

BACK

FIG. 1-DRAWERS, MEN'S, BOXER STYLE

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:15Z
Check the source to verify that this is the current version before use.