MIL-R-40141C

22 September 1970
SUPERSEDING
MIL-R-40141B
18 July 1966

MILITARY SPECIFICATION

RACKS, INSERT, BAKING AND ROASTING PAN

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope.- This specification covers corrosion-resisting steel baking and roasting pan insert racks.

1.2 Classification.- Insert racks shall be of the following sizes, as specified (see 6.2).

Size 1 - 19-1/4 inches long by 13-1/4 inches wide by 1-13/32 inches high

Size 2 - 12 inches long by 12 inches wide by 1-3/32 inches high

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

QQ-W-423 - Wire, Steel, Corrosion-Resisting
PPP-B-636 - Box, Fiberboard

FSC 7330

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:20Z
Check the source to verify that this is the current version before use.

STANDARDS

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage
MIL-STD-147 - Palletized and Containerized Unit Loads 40" x 48" Pallets, Skids, Runners, or Pallet-Type Base

DRAWING

ARMY NATICK LABORATORIES

5-11-827 - Rack, Insert, Baking and Roasting Pan

(Miniature copy of Drawing 5-11-827, identified as figure 1, is attached for information purposes only.)

(Copies of specifications, standards, and drawings required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications.- The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal, shall apply.

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC.

National Motor Freight Classification

(Application for copies should be addressed to American Trucking Associations, ATTN: Tariff Order Section, 1616 P Street, N.W., Washington, D.C. 20036.)

UNIFORM CLASSIFICATION COMMITTEE

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 202 Union Station, 516 W. Jackson Blvd., Chicago, Illinois 60606.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:20Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

* 3.1 Materials.- Materials not definitely specified shall be of the quality normally used by the manufacturer for his insert racks provided the completed items comply with all provisions of this specification. Commercial tolerances are applicable to all metal thicknesses and diameters.

3.1.1 Corrosion-resisting steel wire.- The corrosion-resisting steel wire shall conform to form I, composition 302 or 304, annealed, of QQ-W-423.

3.2 Design and construction.- The design and construction of racks shall conform to the details and dimensions specified on Drawing 5-11-827. Racks shall be of the sizes as indicated in 1.2.

* 3.3 Finish.- All surfaces of the racks shall be cleaned and polished, or electropolished to a bright finish in accordance with the manufacturer's standard practice. The racks shall be free from discoloration or stains.

* 3.4 Workmanship.- The racks shall not contain any burrs, slivers, rough grind marks, or sharp edges and corners. The finished items shall not be fractured, buckled, dented, or malformed.

* 3.4.1 Welding.- All surfaces to be welded shall be free from oxide, scale or grease.

* 3.4.1.1 Fusion welds.- Fusion welds shall be smooth and complete, without fractures or undercuts, and free of areas of poor or no fusion. All flux and metal spatter shall be removed and all welded surfaces shall be ground to remove irregularities, and metal build-ups. Corner welds shall be ground to a radius.

* 3.4.1.2 Spot welds.- Spot welds shall be sound and free of flashes, pits, burn-throughs, surface burning, or discoloration. Spot welds shall show penetration in each welded part.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsiblity for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:20Z
Check the source to verify that this is the current version before use.

4.2 Inspection.- Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

4.2.1 Component and material inspection.- In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

4.2.2 End item inspection.- The inspection lot shall consist of all racks of one size offered for inspection at one time. The sample unit for the inspection shall be one completely fabricated insert rack.

4.2.2.1 Visual examination.- Examination shall be made of the racks for defects in table I. The inspection level shall be level II with an acceptable quality level (AQL) of 2.5 for major defects and 6.5 for total defects, expressed in terms of defects per hundred units.

TABLE I.- Classification of defects

Examine	Defect	Classification Major	Minor
Finish	Not as specified.		X
	Not cleaned.	X	
	Evidence of discoloration, or stains.	X	
Construction and workmanship (general)	Any part missing.	X	
	Any burr, sliver, sharp edge or corner or rough grind marks.	X	
	Any component not properly assembled.	X	
	Any component fractured, buckled, dented, or malformed.	X	
	Support rods not as specified.	X	
Welding (general)	Not free from oxide, scale, or grease.	X	
Fusion welds	Not smooth and complete; areas of poor or no fusion.	X	
	Any evidence of undercuts or fractures.	X	
	Flux and metal spatter not removed.		X
	Corners not ground to a radius.		X
	Irregularities and build-up not ground.	X	
Spot welds	Missing.	X	
	Not sound.	X	
	Not free of flashes, burn-through, or surface burning.	X	
	No weld penetration in each welded part.	X	

Source: https://assist.dla.mil -- Downloaded: 202610-21T19:20Z
Check the source to verify that this is the current version before use.

4.2.2.2 Dimensional examination.- Examination shall be made of the rack to determine compliance with dimensional requirements of this specification. Any dimension that is not within the specified requirements shall be classified a defect. The inspection level shall be S-2 with an AQL of 4.0 defects, expressed in terms of defects per hundred units.

* 4.2.3 Examination of preparation for delivery.- An examination shall be made to determine that packaging, packing, and marking as required by section 5 of this specification are complied with. Defects shall be scored as specified in table II. The sample unit shall be one shipping container fully prepared for delivery. The lot shall be the number of containers offered for inspection at one time. The inspection level shall be S-2 with an AQL of 4.0 defects, expressed in terms of defects per hundred units.

TABLE II.- Preparation for delivery defects

Examination	Defect
Marking, exterior	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.
Materials	Component missing, damaged, or otherwise defective.
Content	Number per container is more or less than required.

* 4.2.3.1 Examination of shipping containers.- When shipping containers are required to be in accordance with PPP-B-636, examination for defects in closure, waterproofing, and strapping shall be in accordance with PPP-B-636.

* 4.2.4 Examination of palletization.- An examination shall be made to determine that palletization is in compliance with section 5 of this specification. Defects shall be scored as specified in table III. The sample unit for this examination shall be one palletized unit load ready for shipment. The lot shall be the number of palletized unit loads submitted for inspection at one time. The inspection level shall be S-1 with an AQL of 6.5 expressed in terms of defects per hundred units.

TABLE III.- Examination of palletization

Examination	Defect
Finished dimension	Length, width, or height exceeds specified maximum requirement.

Source: https://assist.dla.mil -- Downloaded: 202610-21T19:20Z
Check the source to verify that this is the current version before use.

TABLE III.- Examination of palletization (cont'd)

Examination	Defect
Palletization	Not as specified. Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded with required straps specified.
Weight	Exceeds maximum load limits.
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.

5. PREPARATION FOR DELIVERY

5.1 Packaging.- Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A.- Two racks shall be alternated end for end and nested with the bottoms together, allowing a 1-inch offset lengthwise for nesting purposes. The two racks shall be secured with jute, sisal, manila, or cotton twine or tape.

5.1.2 Level C.- Racks shall be packaged to afford adequate protection against damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice, when it meets this requirment.

5.2 Packing.- Packing shall be level A, B, or C as specified (see 6.2).

* 5.2.1 Level A.- Twenty-four racks of one size only, packaged as specified in 5.1, shall be packed on edge in a snug-fitting fiberboard shipping container conforming to style RSC-L, V2s of PPP-B-636. The inside of each shipping container shall be fitted with a taped liner conforming to type CF, class weather-resistant, variety DW, grade V15c of PPP-B-636. Closure, waterproofing by means of tape, and reinforcing with flat strapping or tape banding, shall be in accordance with the appendix of PPP-B-636.

* 5.2.2 Level B.- Twenty-four racks of one size only, packaged as specified in 5.1, shall be packed on edge in a snug-fitting fiberboard shipping container conforming to style RSC-L, type CF, variety SW, or type SF, class domestic of PPP-B-636. The inside of each shipping container shall be fitted with a taped liner conforming to type CF, class domestic, variety DW, grade 275 of PPP-B-636. Closure shall be in accordance with method II of the appendix of PPP-B-636.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:20Z
Check the source to verify that this is the current version before use.

* 5.2.2.1 When specified (see 6.2), the shipping container shall be a V3c, V3s or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with the appendix thereto.

* 5.2.3 Level C.- Racks, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

* 5.3 Palletization.- Unless otherwise specified (see 6.2), racks packed as specified shall be palletized in accordance with load type I of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means K and L. Pallet patterns shall be in accordance with the appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the pallet patterns specified in MIL-STD-147, the pallet pattern used shall first be approved by the contracting officer.

5.4 Marking.- In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use.- The insert racks covered by this specification are intended for use in kitchens with roasting pans to draw grease from meats being roasted and to prevent meats from adhering to the bottom of the roasting pans.

6.2 Ordering data.- Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Size required (see 1.2).
(c) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
(d) When weather-resistant fiberboard is required for level B packing (see 5.2.2.1).
(e) When palletization is not required (see 5.3).

* 6.3 The margins of this specification are marked with an asterisk (*) to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and suppliers are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:20Z
Check the source to verify that this is the current version before use.

Custodians:

Army - GL
Navy - SA
Air Force - 84

Review activities:


Army - MD
Navy - MC, MS, YD

Preparing activity:

Army - GL

Project No. 7330-0275

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:20Z
Check the source to verify that this is the current version before use.

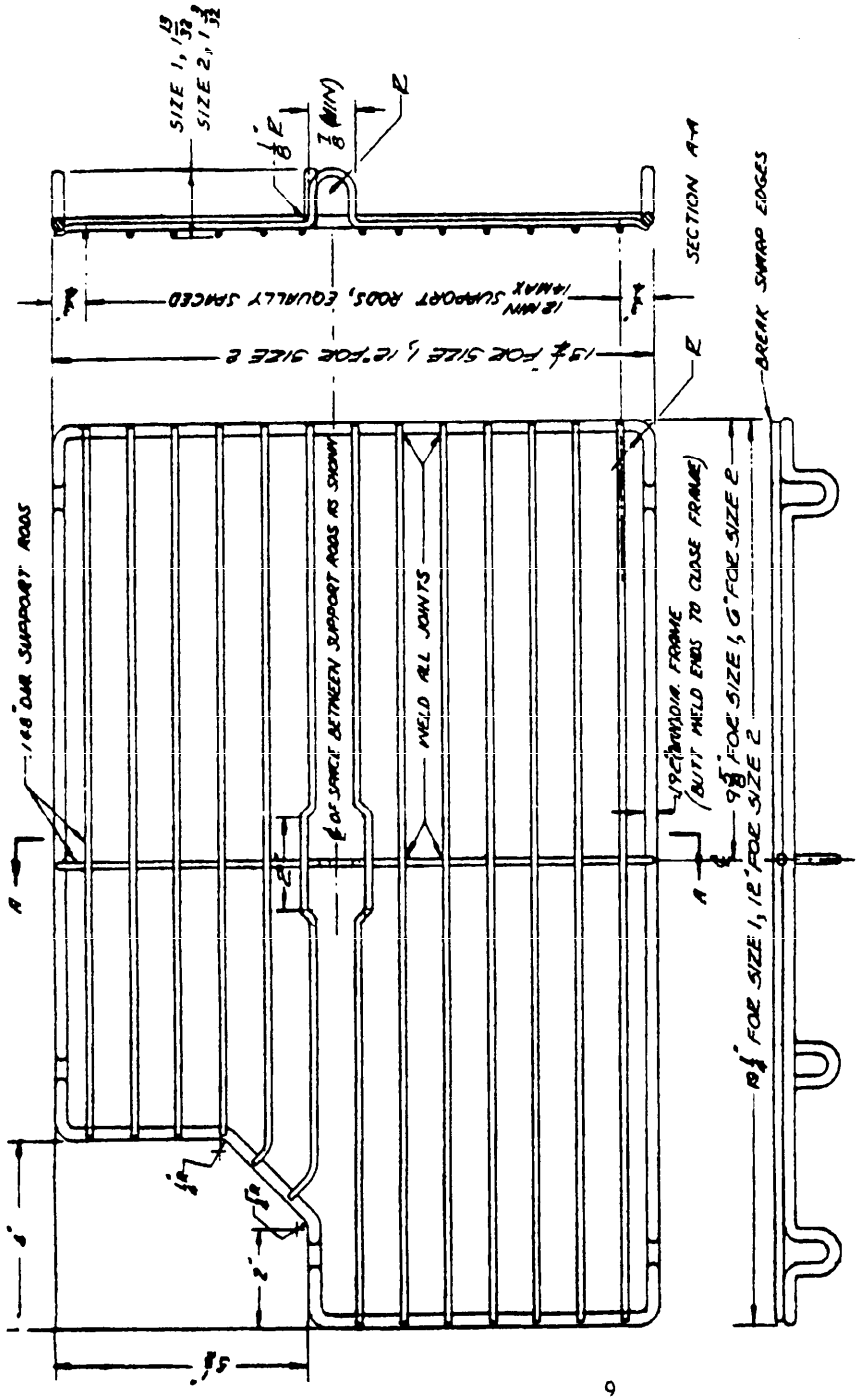

THIS FIGURE IS A MINIATURE COPY OF ARMY NATICK LABORATORIES DRAWING NUMBER 5-11-827, REVISION NUMBER B, DATED 25 MAY 66. THIS COPY IS FOR INFORMATION ONLY; THE DRAWING REFERENCED IN PARAGRAPH 2.1 GOVERNS.

FIGURE-1 RACK, INSERT, BAKING AND ROASTING PAN

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
FABRICATING TOLERANCES:
FRACTIONS ± 1/16 DECIMALS ANGLES
.X ± .1 .XXX ± .005

Source: https://assist.dla.mil -- Downloaded: 202610-21T19:20Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:20Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

MIL-R-40141C - RACKS, INSERT, BAKING AND ROASTING PAN

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026l0-21T19:20Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
U. S. Army Natick Laboratories
Natick, Massachusetts 01760

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

Commanding General
U. S. Army Natick Laboratories
ATTN: AMXRES-BCS
Natick, Massachusetts 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:20Z
Check the source to verify that this is the current version before use.