MIL-S-40128E(GL)
22 September 1981
SUPERSEDING
MIL-S-40128D
27 April 1976

MILITARY SPECIFICATION

SKIRTS, WOMEN'S, WOOL, AND POLYESTER/WOOL

This specification is approved for use by US Army Natick Research and Development Laboratories, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for the manufacture of women's serge and tropical skirts.

1.2 Classification. The skirts shall be one type in the following classes and sizes as specified (see 6.2):

Class 1	-	Skirt, Wool, Serge, Army Green 44
Class 4	-	Skirt, Polyester/Wool, Tropical, Army Green 344
Class 5	-	Skirt, Polyester/Wool, Serge, Army Green 344

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Natick Research and Development Laboratories, Natick, MA 01760 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 8410

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:18Z
Check the source to verify that this is the current version before use.

Schedule of sizes

Extra short	Short	Short plus	Regular	Regular plus	Long	Juniors
8XS	8S	8S+	8R	8R+	8L	9
10XS	10S	10S+	10R	10R+	10L	11
12XS	12S	12S+	12R	12R+	12L	13
14XS	14S	14S+	14R	14R+	14L	15
16XS	16S	16S+	16R	16R+	16L	
	18S	18S+	18R	18R+	18L	
	20S		20R		20L	

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

V-B-871 - Button, Sewing Hole, and Button, Staple, (Plastic)
V-F-106 - Fasteners, Slide, Interlocking
V-T-280 - Thread, Gimp, Cotton, Buttonhole
V-T-295 - Thread, Nylon
DDD-L-20 - Label: For Clothing, Equipage, and Tentage (General Use)
PPP-B-636 - Boxes, Shipping, Fiberboard
PPP-T-45 - Tape, Gummed, Paper, Reinforced and Plain, For Sealing and Securing

MILITARY

MIL-B-371 - Braid, Textile, Tubular
MIL-C-823 - Cloth, Serge, Wool; Wool and Nylon, Polyester and Wool
MIL-C-21115 - Cloth, Tropical: Wool, Polyester/Wool
MIL-T-43548 - Thread, Polyester, Cotton-Covered

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:18Z
Check the source to verify that this is the current version before use.

STANDARDS

FEDERAL

FED-STD-191	-	Textile Test Methods
FED-STD-751	-	Stitches, Seams, and Stitchings

MILITARY

MIL-STD-129	-	Marking for Shipment and Storage
MIL-STD-1188	-	Commercial Packaging of Supplies and Equipment
MIL-STD-1609	-	Provisions for Evaluating Quality of Women's Skirts

(Copies of specifications, standards, drawings and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1. Guide sample. Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variation from this specification may appear in the sample, in which case this specification shall govern.

3.2 Materials (see 6.4).

3.2.1 Basic material.

3.2.1.1 Class 1 skirt. The basic material for class 1 skirt shall be 12 ounce wool serge, Army Green 44, conforming to type I, class 8 of MIL-C-823.

3.2.1.2 Class 4 skirt. The basic material for the class 4 skirt shall be 10 ounce polyester/wool tropical cloth, Army Green 344 conforming to type III, class 3 of MIL-C-21115.

3.2.1.3 Class 5 skirt. The basic material for the class 5 skirt shall be 12 ounce polyester/wool serge, Army Green 344, conforming to type III, class 2 of MIL-C-823.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:18Z
Check the source to verify that this is the current version before use.

3.2.2 Tape. The tape, to be furnished with skirts which do not have bottoms overedge stitched (see table II, operation 14.b), shall be 1/2 ± 1/16 inch wide, plain weave, woven of continuous filament rayon yarn. The tape shall weigh not les than 5.0 ounces per gross yards and shall contain not less than 66 ends full width and 52 picks per inch. The color shall match the basic material. The tape shall show "good" fastness to wet dry cleaning and crocking when tested as specified in 4.4.1.

3.2.3 Hanger loop braid. The material for the hanger loop shall conform to type IX, class 1 of MIL-B-371. The color shall match the basic material and shall show "good" fastness to crocking and wet dry cleaning. The hanger loops may be made from the rayon tape specified in 3.2.2.

3.2.4 Labels. Each skirt shall have a size label and a combination identification-instruction label conforming to DDD-L-20. The fastness to dry cleaning requirements of DDD-L-20 shall apply.

3.2.4.1 Size label. The size label shall conform to type VI, class 2.

* 3.2.4.2 Combination identification-instruction label. The label shall conform to type VI, class 15 with the item description, contract number and the contractor's name preceeding the body of the instructions. The item description for the class 1 skirt shall be "Skirt, Woman's, Wool, Serge, AG 44," for the class 4 skirt shall be "Skirt, Woman's, Polyester/Wool, Tropical, AG 344," and for the class 5 skirt shall be "Skirt, Woman's, Polyester/Wool, Serge, AG 344." The body of the instructions shall be as follows:

DRY CLEAN ONLY

3.2.5 Thread. The thread for all skirts shall be cotton-covered polyester conforming to MIL-T-43548. For seaming and stitching, bartacking, top thread of buttonhole stitching, and for stitching on buttons shall be ticket No. 50, 3 ply. Ticket No. 70, 2 ply shall be used for bobbin thread of buttonhole and for overedging. If an automatic sew and shank machine is used for attaching buttons the thread shall be waxed nylon monocord, special No. 5, having a minimum breaking strength of 16 pounds and a minimum length per pound of 2150 yards, and shall be tested for these requirements and for colorfastness (3.2.5.1) in accordance with test method requirements of V-T-295.

3.2.5.1 Color and colorfastness. The color of the thread shall be Green E, C.A. 66034. The thread shall show fastness to wet dry cleaning and light equal to or better than the standard sample. When no standard sample is available, the thread shall show "good" fastness to wet dry cleaning and light.

3.2.6 Gimp. The gimp for reinforcing the buttonhole shall be cotton, type I, or II, size 8 conforming to V-T-280.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:18Z
Check the source to verify that this is the current version before use.

3.2.6.1 Color and colorfastness. The color of the gimp shall be Green E, C.A. 66034. The gimp shall show fastness to wet dry cleaning equal to or better than the standard sample. When no standard sample is available the gimp shall show "good" fastness to wet dry cleaning.

3.2.7 Buttons. The buttons shall conform to type II, class D, style 20 or 21 size 24-line of V-B-871. The color shall be Army Green BR, Cable 62015.

3.2.8 Slide fastener. The slide fastener shall be type I, style 3, short tab pull, size LS, brass or zinc chain, 7 inches in length, conforming to V-F-106 except that the salt spray test shall not apply. As an alternate, a non-metallic slide fastener may be used. The slide fastener chain shall be nylon or polyester coil type, and shall be equal to commercial size No 2. The tape shall be woven from 100 percent polyester, or from blends of nylon and cotton, polyester and cotton, or polyester and rayon and shall have a minimum tape width (each side) of 7/16 inch. The completed slide fastener shall not shrink more than 2 percent when tested as specified in V-F-106. The color of the tape shall be Green, Shade X, Cable No. 66524.

3.2.8.1 Colorfastness. The slide fastener tape shall show fastness to wet dry cleaning equal to or better than the standard sample. When no standard sample is available, the tape shall show "good" fastness to wet dry cleaning.

3.3 Design. The skirt is six-gored with a slide fastener closure at left side with a two-button waistband and is unhemmed (see figure 1).

3.4 Figures. Figures are furnished for information purposes only. In the event of any inconsistencies between the specification and the figure, the specification shall control.

3.5 Patterns. Standard patterns for use in cutting working patterns will be furnished by the Government. The working patterns shall be identical to the Government patterns which shall not be altered in any way. The patterns provide a 3/4 inch seam allowance for front and back seams, 1 inch for side seams and 3/8 inch for waistband.

3.5.1 List of pattern parts. The component parts of the skirt shall be cut from materials as specified and in accordance with the number of parts required for the manufacturing process, as indicated in table I.

TABLE I. List of pattern parts

Material	Pattern nomenclature	Cut parts
Basic material	Center front	1
	Side front	2
	Center back	1
	Side back	2
	Waistband	1
	Placket	1

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:18Z
Check the source to verify that this is the current version before use.

3.6 Construction.

* 3.6.1 Stitches, seams, and stitching. All stitches, seams, and stitching shall conform to FED-STD-751. The type of seam, stitching and stitches per inch shall be as specified in table II. Seam allowances shall be maintained with seams sewn so that no raw edges, run-offs, pleats, puckers, or open seams occur. When two or more methods of seams or stitches are given for the same operation, any one may be used. All seams shall start and finish evenly.

* 3.6.1.1 Type 301 stitching. Ends of all stitchings shall be backstitched or overstitched not less than 3/8 inch except where ends are turned under or caught in other seams or stitching. Ends of a continuous line of stitching shall overlap not less than 1/2 inch. Thread tensions shall be maintained so that there will be no loose bobbin or top thread or excessively tight stitching resulting in puckering of the materials sewn. The lock shall be imbedded in the materials sewed.

* 3.6.1.1.1 Repairs of type 301 stitching. Repairs of type 301 stitching shall be as follows:

a. When thread breaks or bobbin run-outs occur during stitching, the stitching shall be repaired by restarting the stitching a minimum of 1/2 inch back of the end of the stitching. 1/

b. Thread breaks, or two or more consecutive skipped or run-off stitches noted during inspection of the item shall be repaired by overstitching. The stitching shall start a minimum of 1/2 inch in back of the defective area, continue over the defective area, and continue a minimum of 1/2 inch beyond the defective area onto the existing stitching. Loose or excessively tight stitching shall be repaired by removing the defective stitching without damaging the materials, and restitching in the required manner. 1/

1/ When making the above repairs, the ends of the stitching are not required to be backstitched.

* 3.6.1.2 Type 401, 502 and 503 stitching. Thread tension shall be maintained so that there will be no loose stitching. All repairs shall be in accordance with 3.6.1.1.1a. and 3.6.1.1.1b. Thread tension shall be maintained so that there will be no loose or excessively tight stitching resulting in puckering of the materials sewn.

* 3.6.2 Buttonholes. The buttonholes shall be cut first or after, eyelet-end-taper-bar or square bar type, worked over gimp (see 3.2.6) with not less than four tacking stitches at bar end (not counting cross over stitch). The purling shall be on the outside of the finished waistband at the pointed end and on the underside at the straight end. The finished cut length shall be 5/8 to 3/4 inch. The buttonholes shall be clean cut with the stitching securely caught in the fabric. Additive treatments or materials used to secure the ends of the stitching or to stiffen the fabric prior to stitching the buttonholes are prohibited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:18Z
Check the source to verify that this is the current version before use.

* 3.6.3 Bartack. The bartack shall measure 1/2 ± 1/16 inch in length, 1/8 ± 1/32 inch wide and shall contain 28 stitches. The bartack shall be free from thread breaks and loose or tight stitching.

3.7 Manufacturing operations requirements. The skirts shall be manufactured in accordance with operation requirements specified in table II. The contractor is not required to follow the exact sequence of operations listed. Any basting or holding stitching used to facilitate manufacture is permissible provided the thread is removed or does not show on the finished skirts.

3.7.1 Shade and size marking. The component parts of the skirt shall be marked or bundled to insure a uniform shade and size throughout the garment. Any method of marking may be used except:

(a) Corrosive metal fastening device.

(b) Adhesive-type tickets which leave traces of paper or adhesive on material after removal of tickets.

3.7.2 Pressing. All pressing as required in table II shall be performed with a heated iron or machine. Any additional underpressing to facilitate manufacture is permissible.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:18Z
Check the source to verify that this is the current version before use.

TABLE II
MANUFACTURING OPERATIONS REQUIREMENTS

NO.		STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN / LOOPER	COVER
1.	Cutting. a. Spread the material without tension so that the cut parts from the top and bottom plies will match the pattern. b. Cut the skirts in strict accordance with the patterns furnished, which show directional lines, size and notches for assembly of parts. Directional lines shall be placed in the warp direction of the material. c. Cut all basic parts of the skirt out of the same piece of material, except placket which may be cut from ends. The placket piece shall approximate the shade of the skirt. d. Cut the braid or tape for hanger loops (two each) of sufficient length to measure 1-1/2 ± 1/4 inches long (folded) in the finished skirt (see operations 8 and 9). e. Cut hem tapes not less than 65 inches long (see operation 14.b). f. Cut a button reinforcement piece (class 4 skirt only) of basic material or other suitable bleached or unbleached material in sufficient size to reinforce the button on the underside of the waistband (see operation 9a). If cut from basic material, may be cut from ends.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:18Z
Check the source to verify that this is the current version before use.

NO.	TABLE II (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN / LOOPER	COVER
2.	Replacement of damaged parts. Care shall be exercised during the spreading, cutting and manufacturing operations to assure that material defects and damages, as classified in MIL-STD-1609, are excluded and replaced with non-defective and properly matched material.						
3.	Shade and size markings. Mark, ticket or bundle all parts to insure a uniform shade size and proper assembly of the skirt.						
4.	Make darts on skirt. a. Fold darts as indicated by marks on pattern and stitch tapering to nothing 3/4 to 1 inch below drill hole. b. Press darts flat with inside folded edge toward center front and center back, on finished skirt.	301	OSf-1	10-14	50-3	50-3	
5.	Make fronts and backs. a. Starting at waistline with notches matched, stitch side fronts to center front and side backs to center back. The width of the seams after pinking (operation 5b) shall be not less than 3/4 inch. Depth of pinking shall be 1/8 to 3/16 inch.	301 or 401	SSa-1 SSa-1	10-14 10-14	50-3 50-3	50-3 70-2	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:18Z
Check the source to verify that this is the current version before use.

TABLE II (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN / LOOPER	COVER
5.	Make fronts and backs. (cont'd)						
	b. Pink seams including placket opening.						
	or						
	Pink and stitch seams in one operation maintaining seam allowance. (Depth of pinking shall be 1/8 to 3/16 inch).	301	SSa-1	10-14	50-3	50-3	
	c. Press seams open.						
6.	Join front to back.						
	a. Starting at top, stitch fronts to backs leaving opening for placket on left side. (The width of the seams after pinking (operation 6.b) shall be not less than 1 inch. Depth of pinking shall be 1/8 to 3/16 inch).	301 or 401	SSa-1 SSa-1	10-14 10-14	50-3 50-3	50-3 70-2	
	(NOTE: The center back panel is wider in the hip area than the center front panel and the front side panels have the shorter darts).						
	b. Pink seams, including the edges of left side opening, and bottom edge.						
	or						
	Pink and seam in one operation maintaining seam allowance. (Depth of pinking shall be 1/8 to 3/16 inch).	301	SSa-1	10-14	50-3	50-3	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:18Z
Check the source to verify that this is the current version before use.

NO.	TABLE II (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
6.	Join front to back. (cont'd)						
	c. As an alternate to pinking, the bottom of the skirt may be overedge stitched.	502 or 503	EFd-1	6-8	70-2	70-2	
	d. Press seams open.						
7.	Make placket.						
	Finished appearance. The placket shall be smooth and flat. The stops at top of fastener shall be not more than 1/2 inch below waistband on the finished skirt. The front skirt shall completely cover the slide fastener when slide fastener is closed and the front skirt shall overlap the back skirt slightly at the bottom of placket without pleats or puckers on the outside. The stitching shall not interfere with the operation of the slider. The bottom stop on slide fastener shall be positioned not more than 1/4 inch above or below the top end of side seam.						
	a. Fold the placket piece in half lengthwise. Place slide fastener on placket with the center of the closed chain 3/4 to 7/8 inch from folded edge and stitch fastener tape to placket 1/8 inch from edge of chain along the side nearest to the raw edge of placket.	301	SSa-1	10-14	50-3	50-3	
	b. Pink side and bottom edge of placket piece.						
	c. Place placket (chain side down) on back of skirt with the center of the closed chain 1/8 to 3/16 inch to the front of the side seam and stitch placket to opening, following the curve of the hip. Do not stretch fabric.	301		10-14	50-3	50-3	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:18Z
Check the source to verify that this is the current version before use.

TABLE II (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN LOOPER	COVER
7	Make placket. (cont'd)						
	d. Turn placket to its finished position and stitch 1/16 to 1/8 inch from folded edge of skirt through fastener tape and placket piece.	301	LSah-1	10-14	50-3	50-3	
	e. Stitch front half of fastener tape to front raw edge of skirt opening, following curve of hip. Do not stretch fabric.	301	SSbd-1	10-14	50-3	50-3	
	f. Fold front opening in line with side seam and stitch to fastener tape, forming a welt 1/2 to 5/8 inch wide; stitch across the bottom of welt to the side seam, catching the placket and ends of fastener tapes in the stitching. The stitching shall be 1/8 to 1/4 inch from the chain and the welt shall cover the slide fastener and the stitching along back edge when fastener is closed.	301		10-14	50-3	50-3	
	NOTE: Operations c and e above may be omitted providing all other requirements are complied with.						
8	Make hanger loop stripping (optional).						
	Fold hem tape in half lengthwise and stitch edges together.	301	EFu-1(a)	10-14	50-3	50-3	
9	Attach waistband, labels and hanger loops.						
	Finished appearance. The waistband width shall be uniform and the pointed end shall be on the front. The hanger loops shall be positioned over the right side seam and directly back of placket.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:18Z
Check the source to verify that this is the current version before use.

NO.	TABLE II (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
9.	Attach waistband, labels and hanger loops. (cont'd)						
	The labels shall be positioned side by side on center of back with the size label on the left side (when skirt is worn). The combination label shall be centered (1/2 inch off center tolerance) on the center back. The stitching shall not be through the label printing.						
	a. Position button reinforcement piece (class 4 skirt only) on the inside of waistband 3/8 inch up from bottom edge, and stitch to waistband along top and side edges or along side edges only. The ends of stitching need not be backtacked (see operations 1f and 11b).	301	LSa-1	10-14	50-3	50-3	
	b. Stitch waistband to inside top of skirt catching hanger loops and labels in the stitching, matching notches and easing in the fullness of front skirt evenly.	301	BSg-2(a)	10-14	50-3	50-3	
	c. Fold the waistband in half lengthwise; seam the straight end and the pointed end. Trim, turn to outside and work out corners and point.	301	SSe-2(a)	10-14	50-3	50-3	
	or						
	As an alternate method, the pointed and straight end of waistband may be seamed, trimmed, and turned, prior to setting wasitband to skirt.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:18Z
Check the source to verify that this is the current version before use.

TABLE II (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
9.	Attach waistband, labels and hanger loops. (cont'd)						
	d. Turn under free edge of waistband and edge stitch to skirt on outside; continue edge stitching around ends and along top of waistband. The edge stitching shall be 1/16 inch gage.	301	BSg-2(b) and SSe-2(b) and OSf-1	10-14	50-3	50-3	
		301		10-14	50-3	50-3	
		301		10-14	50-3	50-3	
10.	Make buttonholes.						
*	a. Make one horizontal buttonhole (see 3.6.2) on the pointed end and the underneath straight end of the waistband. The inside edge of the eyelet shall be 1/2 to 3/4 inch from pointed end and 3/8 to 5/8 inch from the straight end. The buttonholes shall be centered (1/4 inch off center tolerance) on waistband.	Buttonhole		50-56 not including tack	50-3	70-2	
	b. When a square bar type of buttonhole is used it shall be bartacked in a separate operation (see 3.6.3).	Bartack		28 per bartack	50-3	70-2	
11.	Attach buttons.						
	a. Mark or gage position for the buttons on the waistband to correspond with buttonholes.						
	b. Sew the buttons on marks indicated at ends of wasitband as follows:						
	(1) Sew button on back (straight) end through all plies.	101 or		14-16 per button	50-3		
		301		14-16 per button	50-3	50-3	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:18Z
Check the source to verify that this is the current version before use.

TABLE II (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
11.	Attach buttons. (cont'd) (2) Sew button on front (pointed) end through underply only on class 1 and class 5 skirts and through underply and reinforcement piece on class 4 skirt. When buttons are sewn by hand, the sewing shall be tacked off with two stitches and the ends of the thread shall be hidden.	Hand or 801 (see figure 2)		6 per button double thread 7 (min) 1 deep set per button	50-3 5 nylon		
12.	Clean skirt. Trim thread ends and remove all loose threads, spots, stains and shade tickets.						
13.	Press skirt. a. Press the entire skirt. b. Remove gloss marks, wrinkles, and impressions from thread, tickets or seams.						
14.	Prepare for packing. a. Examine skirt. b. When the bottom is not overedge stitched, attach by string, to the left loop, an envelope containing the tape (see operations 1.e. and 6.c).						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:18Z
Check the source to verify that this is the current version before use.

3.8 Measurements. The unhemmed skirt shall conform to the finished measurements in table III. The tolerance shall be ± 1/4 inch for waist and ± 1/2 inch for hip and length.

TABLE III. Finished measurements in inches

	Size						
	8	10	12	14	16	18	20
1/2 waist 1/	11-3/4	12-1/4	13	13-3/4	14-/12	15-1/2	16-1/2
1/2 hip: 2/							
- class 1 and class 5 skirt	17-1/2	18-1/4	19-1/8	20	21	22	23
- class 4 skirt	18-1/4	18-3/4	19-1/2	20-1/4	21	22	23
Length:							
- extra short	25	25-1/2	25-3/4	26	26-1/4	--	--
-short	26-1/2	27	27-1/4	27-1/2	27-3/4	28	28-1/4
-regular	28	28-1/2	28-3/4	29	29-1/4	29-1/2	29-3/4
-long	29-3/4	30-1/4	30-1/2	30-3/4	31	31-1/4	31-1/2

	Size- (Junior)			
	9	11	13	15
1/2 Waist	12	12-3/4	13-1/2	14-1/4
1/2 Hip	18	18-3/4	19-1/2	20-1/4
Length	27	27-1/4	27-1/2	27-3/4

1/ The 1/2 waist measurements for the plus (+) sizes are 1/2 inch larger than those shown above.

2/ The 1/2 hip measurements for the plus (+) sizes are 1 inch larger than those shown above.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:18Z
Check the source to verify that this is the current version before use.

3.8.1 Method for measuring. The skirt shall be buttoned, placed flat upon a table and measured as follows:

1/2 waist	- Measure from folded edge to folded edge at center of waistband
1/2 hip	- Measure across skirt from folded edge to folded edge at the following locations: 1/2 inch below side opening for sizes extra short, short, short plus and juniors and 1 inch below placket for sizes regular and long
Length	- Measure from lower edge of waistband to bottom edge of skirt

* 3.9 Workmanship. The finished skirt shall conform to the quality of product established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Certificate of compliance. When certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

* 4.2 Quality conformance inspection. Sampling and inspection shall be performed in accordance with MIL-STD-1609. The skirt shall be classified as Dress ("D") skirt.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:18Z
Check the source to verify that this is the current version before use.

4.2.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase documents. In addition to testing provisions contained in subsidiary specifications, testing shall be performed on components listed in table IV for characteristics noted. Unless otherwise indicated, testing shall be conducted in accordance with methods prescribed in FED-STD-191. The sample unit for testing the tape shall be 3 yards, and the lot size shall be expressed in "yards". When the data in the "Determinations per sample unit" and the "Results reported as" columns are not specified in the table, they shall be as required by the referenced test method. All test reports shall contain the individual values used in expressing the final result. The lot shall be unacceptable if one or more sample units fail to meet any of the test requirements specified. The lot size and sample size shall be in accordance with the following.

Lot size	Sample size
800 or less	2
801 to 22,000 inclusive	3
22,001 and over	5

TABLE IV. Component tests

Component	Characteristic	Requirement paragraph	Test method	Determinations per sample unit	Results reported as
Tape, rayon	Material 1/ identification	3.2.2	1500	-	-
	Width	3.2.2	5020	1	Pass or fail
	Weight per gross yards	3.2.2	5041	2/	-
	Yarns per inch	3.2.2	5050	-	-
	Colorfastness - crocking	3.2.2	5651	-	-
	- wet dry cleaning	3.2.2	5622	-	-

1/ Unless otherwise specified, a certificate of compliance shall be submitted and will be acceptable for this characteristic.

2/ The result in ounces per linear yard shall be multiplied by 144 to yield ounces per 1-gross yard.

4.2.1.1 Certification. Conformance to the alternate non-metallic slide fastener requirements in 3.2.8 and 3.2.8.1 shall be on the basis of a contractor's certificate of compliance.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:18Z
Check the source to verify that this is the current version before use.

5. PACKAGING

* 5.1 Preservation. Preservation shall be level A or Commercial as specified (see 6.2).

5.1.1 Level A.

* 5.1.1.1 Unit packing. Each skirt shall be laid out flat. A sheet of 20 pound minimum basis weight kraft paper measuring approximately 26 by 22 inches shall be placed on top of the skirt. Two lengthwise parallel folds shall be made by folding the skirt and paper as a unit, resulting in a folded width of 12 inches. When the width of the kraft paper exceeds that of the skirt, the excess paper may be folded over to the same width of the skirt. The top of the skirt shall then be folded downward to form a unit pack measuring approximately 18-1/2 by 12 inches. Each folded skirt shall be placed in a flat-style clear polyethylene film bag of 0.0015 inch thickness (± 20 percent tolerance). The polyethylene bag shall be formed with heat sealed seams that are straight, continuous and parallel to each other and the formed edges of the bag. The bag may be fabricated from polyethylene film, tubing or sheeting. The bag shall be not less than 1 inch greater in length than the folded garment. The unsealed opening shall be at the smaller dimension of the bag.

* 5.1.1.2 Intermediate packing. Ten skirts of one class and size only, packaged as specified in 5.1.1.1, shall be placed in an intermediate fiberboard box conforming to style RSC, type CF (variety SW), class domestic, grade 175 of PPP-B-636. The unit packs shall be alternated end for end, 10 in depth within the fiberboard box. Inside dimensions of the box shall approximate 18-1/2 inches in length, 12 inches in width, and 4 inches in depth. Approximate dimensions are furnished as a guide only. Two ounces of naphthalene flakes shall be uniformly distributed throughout the contents of each box, except where skirts are made from cloth pretreated with a moth repellent. Box closure shall be secured with 2 inch minimum width gummed paper tape conforming to type III, grade B of PPP-T-45, applied at the center of the length opening and extending along the bottom and up each side at least 3 inches.

* 5.1.2 Commercial. Skirts shall be preserved in accordance with MIL-STD-1188.

5.2 Packing. Packing shall be level A, B, or Commercial as specified (see 6.2).

* 5.2.1 Level A packing. Thirty skirts of one class and size only, preserved as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC, grade V2s of PPP-B-636. Level A intermediate packs shall be packed flat, three in depth within a shipping container. Inside dimensions of each shipping container shall approximate 20-1/2 inches in length, 14 inches in width, and 13-1/2 inches in depth. Approximate dimensions are furnished as a guide only. Each shipping container shall be closed in accordance with method III, waterproofed in accordance with method V, and reinforced as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with the applicable provisions of MIL-STD-1609. Toward the end of the contract or when there are less than the required amount per shipping container of the same class and size, mixed sizes of the same class may be packed within the same shipping container.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:18Z
Check the source to verify that this is the current version before use.

* 5.2.2 Level B packing. Thirty skirts of one class and size only, preserved as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC, type CF (variety SW), or SF, class domestic, grade 275 of PPP-B-636. Level A intermediate packs shall be packed flat, three in depth within a shipping container. Inside dimensions of each shipping container shall approximate 20-1/2 inches in length, 14 inches in width, and 13-/12 inches in depth. Approximate dimensions are furnished as a guide only. Each shipping container shall be closed in accordance with method II as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with the applicable provisions of MIL-STD-1609. Toward the end of the contract, or when there are less than the required amount per shipping container of the same class and size, mixed sizes of the same class may be packed within the same shipping container.

* 5.2.2.1 Weather-resistant fiberboard containers. When specified (see 6.2), the shipping container shall be a grade V3c, V3s or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with method III as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with the applicable requirements of MIL-STD-1609.

* 5.2.3 Commercial. Skirts preserved as specified in 5.1, shall be packed in accordance with MIL-STD-1188.

* 5.3 Marking. In addition to any special marking required by the contract, intermediate packs and shipping containers shall be marked in accordance with MIL-STD-129 or MIL-STD-1188.

* 5.3.1 Polyethylene bagged unit packs. Polyethylene bagged unit packs shall have the required identification information legibly printed or stamped in black directly on the bag across the center face or on a white paper label inserted within the bag so as to permit ready identification.

5.3.2 Labels, mixed sizes. Each shipping container, packed with mixed sizes of one class only shall have securely attached to the end and side, directly under the printing or stenciling, a white paper label 5 by 4 inches with the words "MIXED SIZES" plainly stamped or printed thereon, and under these words shall be legibly stamped or printed the correct quantity and sizes contained therein.

6. NOTES

6.1 Intended use. The skirts are intended for wear by female personnel of the Department of the Army.

* 6.2 Ordering data. Procurement documents shoudl specify the following:

(a) Title, number and date of this specification.
(b) Class and size required (see 1.2).
(c) Selection of applicable levels of preservation and packing (see 5.1 and 5.2).
(d) When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:18Z
Check the source to verify that this is the current version before use.

6.3 Samples. For access to samples, address the procuring office issuing the invitation for bids.

* 6.4 Recycled material. It is encouraged that recylced material be used when practical as long as it meets the requirements of the specification.

6.5 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only, and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:

Army - GL

Review activities:

Army - MD
DLA - CT

Preparing activity:

Army - GL

Project No. 8410-A384

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:18Z
Check the source to verify that this is the current version before use.


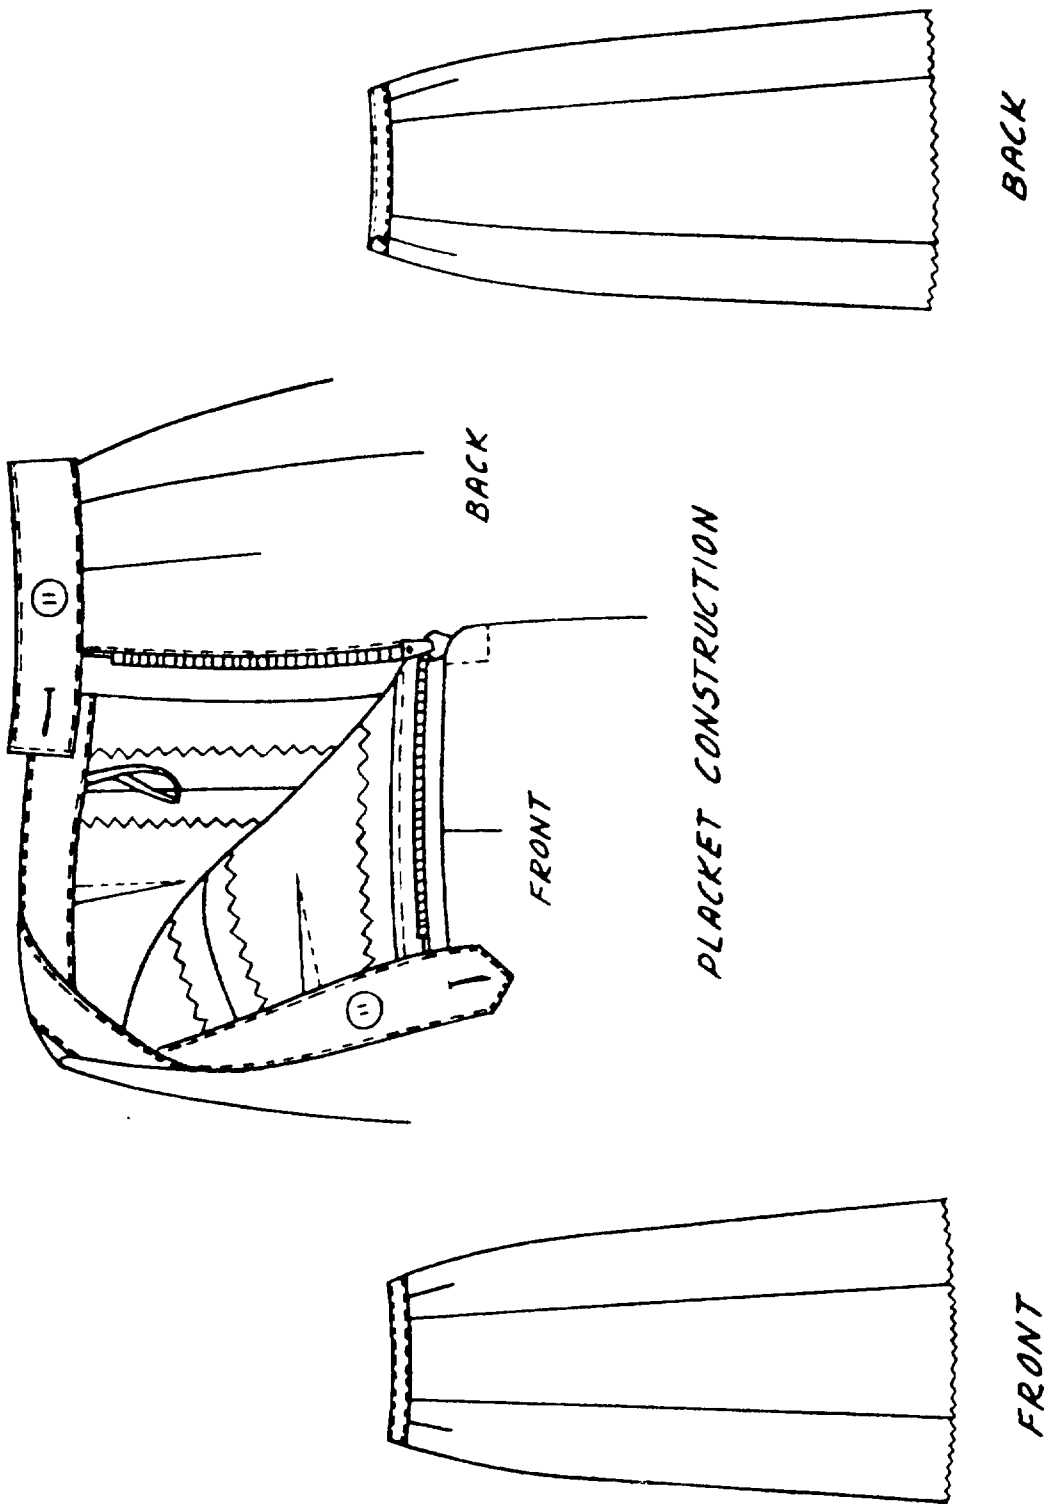


FIG 1 - SKIRTS, WOMEN'S, WOOL AND POLYESTER/WOOL

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:18Z
Check the source to verify that this is the current version before use.

Stitch Class 800.- This class of stitch shall be formed with one or more needle threads and has for a general characteristic that the thread does not interloop with itself or any other thread or threads. The thread is passed completely through the material by means of a double pointed center eye needle and returned by another path. This class of stitch simulates hand stitching.

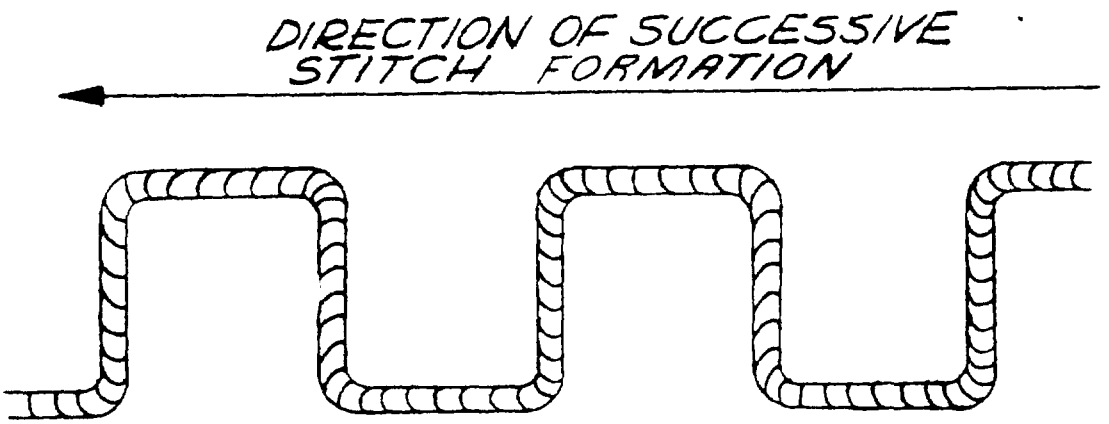

This type of stitch shall be formed with one needle thread which is passed completely through the material and returned by another path after the material has been moved forward one stitch length.

FIGURE-2-STITCH TYPE 801

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:18Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:18Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.
NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-S-40128E(GL) Skirts, Women's, Wool, And Polyester/Wool

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO

DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:18Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY CARD

FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Natick Research and Development Command
ATTN: DRDNA-ES
Natick, MA 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:18Z
Check the source to verify that this is the current version before use.