MILITARY SPECIFICATION

TROPHY, NATIONAL GUARD, EISENHOWER AWARD

1. SCOPE

1.1 This specification covers the National Guard Eisenhower Award Trophy (see 6.1).

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bid, form a part of this specification.

SPECIFICATIONS

FEDERAL

UU–P–553 — Paper, Wrapping, Tissue.

PPP–B–636 — Boxes, Fiber.

PPP–B–676 — Boxes, Set-Up, Paperboard.

MILITARY

MIL–L–10547 — Liners, Case, Waterproof.

STANDARDS

MILITARY

MIL–STD–105 — Sampling Procedures and Tables for Inspection by Attributes.

MIL–STD–129 — Marking for Shipment and Storage.

(Copies of specifications and standards required by the contractor in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 **Other publications.** The following publication forms a part of this specification. Unless otherwise indicated, the issue in effect on date of invitation for bids shall apply.

UNIFORM CLASSIFICATION COMMITTEE

Uniform Freight Classification Rules.

(Application for copies of these freight classification rules should be addressed to the Uniform Classification Committee, 202 Chicago Union Station, Chicago 6, Ill.)

3. REQUIREMENTS

3.1 **Standard sample.** Unless otherwise specified (see 6.2), a standard sample of the trophy shall be furnished by the contracting officer and shall be used only for matching color and finish. Other characteristics of the standard sample may vary from this specification but this specification shall govern in all cases.

3.2 **Preproduction sample.** Unless otherwise specified (see 6.2), before quantity production is commenced, a sample trophy shall be submitted or made ready for approval of the contracting officer, or his authorized representative, for inspection and

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:17Z
Check the source to verify that this is the current version before use.

tests as specified in section 4 to determine compliance with this specification. Approval of the preproduction sample authorizes the commencement of production, but does not relieve the contractor of responsibility for compliance with all provisions of this specification.

3.3 **Materials.** Materials shall conform to the specifications and requirements specified herein .

3.3.1 *Bronze.* Bronze shall be a copper-zinc alloy having a composition of 84 to 86 percent copper and remainder zinc.

3.3.2 *Brass.* Brass shall be a copper-zinc alloy having a composition of 60 to 67 percent copper, 3.75 percent (maximum) lead, and remainder zinc.

3.3.3 *Solder.*

3.3.3.1 *Hard solder.* Hard solder shall be a commercial non-ferrous alloy having a melting point of not less than 1075°F.

3.3.3.2 *Soft solder.* Soft solder shall be a tin-lead alloy having a melting point of not less than 375°F.

3.3.4 *Wood.* Wood shall be solid walnut, free from decay, knots, checks, excessive color variation or other imperfections that would mar the general appearance of the finished item.

3.3.5 *Felt.* Felt shall be green wool, 1/16 inch thick.

3.3.6 *Lacquer.* Lacquer shall be a clear, pale synthetic lacquer.

3.4 **Construction.** Trophy shall be made in accordance with the design, details, dimensions and materials as specified herein and as shown on figure 1.

3.4.1 *Bowl.* The bowl shall be spun from bronze specified in 3.3.1 and shall have a finished wall thickness of 0.038 to 0.050 inch. The top of the bowl shall have a rolled-over lip.

3.4.2 *Lug.* The lug shall be made from bronze specified in 3.3.1 and shall be soft soldered to the bottom of the bowl. The lug shall be reinforced with a backup cup or housing soft soldered to the bowl, lug and foot. Lug shall have a 1/4–20 UNC–2B threaded through hole.

3.4.3 *Insignia.* The National Guard Bureau insignia shall be struck from bronze specified in 3.3.1 and shall be 1 inch, plus or minus 1/64 inch, in height. The design of the insignia shall be an exact replica of the design on the Government furnished hub (see 3.4.3.2). The insignia shall be dapped to fit the contour of the bowl. The insignia shall be secured to the bowl by 2 brass rivets, 0.072 plus or minus 0.005 inch in diameter. Rivets shall be hard soldered to back of insignia and shall be neatly and accurately peened over bronze washers to the inside of the bowl.

3.4.3.1 *Piercing and trimming.* The piercing and trimming shall accurately follow the stamped outline and shall remove the metal clean and smooth without burrs, drag, cutter or tool marks and without damaging or distorting the design or altering the shape of the insignia.

3.4.3.2 *Government loaned property.*

3.4.3.2.1 *Hub, dies and tools.* A hub for the National Guard Bureau insignia will be furnished by the Government and shall be used only for making contractor's working die. The die shall produce a well-defined die-struck edge. The contractor's stamping or embossing die shall be tooled and polished to remove any dents, nicks, scratches or other imperfections, and the unornamented sections shall be smooth and polished. Die and tools shall be furnished by the contractor and shall remain his property.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:17Z
Check the source to verify that this is the current version before use.

3.4.4 *Inscription band.* The inscription band shall be made from bronze specified in 3.3.1 and shall be formed into a ring with ends butted and hard soldered. Overall thickness of the band shall be not less than 1/16 inch. The band shall be soft soldered to the bowl in the location shown on figure 1. The band shall be engraved with 3/16 inch high, plus or minus 1/32 inch, V incised, Roman letters as shown on figure 1. Figure 1 does not show a true projection of lettering. Length of inscription shall be 4 inches, plus or minus 1/16 inch measured on the curved surface.

3.4.5 *Foot.* The foot shall be spun from bronze specified in 3.3.1 and shall have a wall thickness of 0.038 to 0.050 inch. Foot shall be soft soldered to the outside of the bowl.

3.4.6 *Base.* The base shall be made from walnut wood specified in 3.3.4 and shall be smoothly finished. There shall be no grain tear out or other machining defects on exposed surfaces. The base shall be secured to the foot by a 1/4–20 UNC–2A, brass, round head screw with brass washer, by engaging the threaded lug at the bottom of the bowl. A pad made from felt specified in 3.3.5 shall be cemented to the bottom of the base.

3.4.7 *Soldering.* Soldered parts shall be completely joined without excess solder, using the solder specified in 3.3.3.1 and 3.3.3.2 as specified. All excess flux shall be removed and joints shall be clean, strong and smooth and free from burned or reduced areas.

3.4.8 *Assembly.* All components shall be assembled symmetrically within a tolerance of plus or minus 1/32 inch.

3.4.9 *Dimensional tolerances.* Unless otherwise specified herein, the following tolerances shall apply: all dimensions less than 1 inch, plus or minus 1/64 inch; all dimensions, 1 inch or greater, plus or minus 1/32 inch.

3.5 **Finish.** The finish of the trophy shall be as specified herein and shall match the finish of a standard sample (see 3.1), or an approved sample (see 3.2).

3.5.1 *Bowl, foot and inscription band.* The outside surface of the bowl, foot and inscription band shall have a fine satin finish. The inside surface of the bowl shall be buffed to a Butler finish.

3.5.2 *Insignia.* The National Guard Bureau insignia shall be gold plated on the front and edges with 24 karat gold. The plating shall be nonporous and continuous over the entire plated surface. The use of white metal as an undercoating shall not be permitted. When tested as specified in 4.4.1 no chemical reaction, such as evolution of gases, shall appear. The highlights of the insignia shall be hand burnished.

3.5.3 *Base.* The base shall be sanded smooth and stained a dark walnut color, filled and rubbed with a fine rubbing compound. The exposed, exterior surfaces, except bottom, shall be waxed and polished to a high gloss.

3.5.4 *Lacquering.* All exposed surfaces of the trophy, except the wood base, shall be coated with lacquer specified in 3.3.6. The dry lacquer film shall be hard, continuous, level, adherent and essentially free from lint, dust or other inclusions. When tested as specified in 4.4.2.1 there shall be no change in the appearance of the trophy, except a slight overall yellowing around highlighted areas and occasional dark spots, widely distributed and each not exceeding 1/32 inch largest dimension. The liver of sulfur test shall not be required for the gold-plated insignia. When tested as specified in 4.4.2.2 the tissue paper shall fall free when finger pressure is released.

3.6 **Workmanship.** The trophy shall be clean, well made and free from any defect which may affect appearance or serviceability.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:17Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Inspection responsibility. Unless otherwise specified herein the supplier is responsible for the performance of all inspection requirements prior to submission for Government inspection and acceptance. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. Inspection records of the examinations and tests shall be kept complete and available to the Government as specified in the contract or order.

4.2 Preproduction inspection. When required, inspection and testing of the preproduction sample shall be made of a completely fabricated trophy for all provisions of this specification applicable to end product examination and tests.

4.3 Inspection for acceptance. Inspection shall be in accordance with the provisions set forth in Standard MIL–STD–105, except where otherwise indicated.

4.3.1 *Inspection of components.*

4.3.1.1 *Inspection of components and materials.* In addition to the quality assurance provisions of the subsidiary specifications and drawings, inspection shall be performed on components and materials listed in table I for the characteristics shown.

TABLE I. *Inspection of components and materials*

Component and materials (Lot expressed in terms of)	Characteristic	Requirement paragraph	Test method	Requirement applicable to		Number determinations per sample unit	Results Reported as	Sample unit	Inspection Level	AQL
				Individual unit	Lot average					
Bronze (1 pound).	Chemical composition.	3.3.1	Standard commercial.	Composite		2	To nearest 0.1 percent; each element.	4 oz.	L1	Not applicable.

4.3.1.2 *Certificate of compliance.* Components and materials listed in table II may be accepted on the basis of a contractor's certification of compliance for requirements specified in applicable paragraphs of this specification.

TABLE II. *Certificate of compliance*

Component	Characteristic	Requirement paragraph
Hard solder	Material identification and melting point	3.3.3.1
Soft solder	Material identification and melting point	3.3.3.2
Felt	Material identification and thickness	3.3.5
Lacquer	Material identification	3.3.6
Rivets with washers	Material identification	3.4.3
Round head screw	Shall be brass ¼–20 UNC–2A	3.4.6
Washer	Material identification	3.4.6

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:17Z
Check the source to verify that this is the current version before use.

4.3.2 *Inspection of the end item.*

4.3.2.1 *Visual examination of trophy.* The defects found during examination shall be classified in accordance with 4.3.2.1.1 and 4.3.2.1.2. The lots shall be inspected in accordance with 4.3.2.1.3. The unit of product for these examinations shall be 1 trophy.

4.3.2.1.1 *Examination of trophy, for defects in design, material, construction, workmanship and engraving.*

Examine	Defect
Finish	
General	Color and finish does not compare favorably with the standard or approved sample.
	Tool mark, scratch, dent or other defect affecting appearance or serviceability. (Light, hairline scratches which are not noticeable at a distance of 16 inches, when the trophy is set upon its base, shall not be classified as a defect.)
	Not clean.
	Discoloration affecting appearance (small spots which are not noticeable at a distance of 16 inches, when the trophy is set upon its base, shall not be classified as a defect).
Body	Not finished or finish not as specified.
Insignia	Not gold plated.
	Plating is not continuous or is cut through or porous or is not adherent.
	Foreign matter imbedded.
	All exposed surfaces of the trophy (except the wood base) are not lacquered.
	Lacquer is not transparent.
	Foreign matter imbedded in finish, i.e., lint or dust clearly discernible.
	Not set to touch, i.e., appears to be tacky when gentle finger pressure is applied to coating.
	Not level, not smooth, not adherent and not continuous coating, i.e., flaking, blistering, rippling, peeling or has orange peel effect, run, sag, lap or starved surface.
	Coating blistered, hazy, cloudy or powdered.
	Grease, dirt, or fingerprints.
Wood base	Not walnut.
	Not dark walnut color.
	Finish of exposed, exterior surfaces (except bottom) not smooth or not waxed and polished to a high gloss.
	Scratch, gouge, grain tear out, decay, or other defect affecting appearance or serviceability.
	Any knot, check, excessive color variation or other imperfection affecting appearance.
	Burn-in or other repair affecting appearance.
	Bolt hole not countersunk to specified depth.
Materials	Any component not fabricated of the specified material.
Presence of components	Any part missing.
Design	Any characteristic not in accordance with the specified requirements.
	Design details of insignia altered or obscured or not conforming to Government hub or approved sample.
	Detail of insignia not clean and sharp or any warp, twist, or distortion producing irregular surface contour or outline.
	Any significant detail of insignia not clear, marred, missing, reduced or obliterated, i.e., does not compare favorably with the approved sample.
	Surface, edge or rim not clean, not smooth or not free from burrs, drag, cutter or tool marks.
	Top of bowl does not have a rolled-over lip.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:17Z
Check the source to verify that this is the current version before use.

Examine	Defect
Construction and workmanship	Any part fractured, split, dented, malformed or otherwise impaired, affecting serviceability or appearance.
	Not connected or joined as specified, or assembly is poorly accomplished, i.e., insignia not accurately dapped to fit the contour of the bowl or not secured to the bowl by 2 brass rivets, as required.
	Any open joint or gap apparent at the juncture of the body and the band.
	Insignia is attached to the body in other than the specified manner.
	Insignia or band not tightly positioned.
	Insignia or band not in specified location.
	Ends of band not butted or not soldered.
Forming operation	Surface contour or outline irregular or not symmetrical affecting appearance.
Soldering	Missing (where required), not adherent, or is incomplete.
	Area burned or reduced in soldering.
	Not clean (flux or flux residue not removed).
	Spatter or excess solder, affecting appearance.
Felt pad	Not completely cemented to base or area of no adhesion.
Screw	Not approved type or size, broken, stripped, fractured or loose.
Lug	Not approved type or size, broken, stripped, fractured or loose.
Backup cup or housing	Broken, fractured, loose or not approved type or size.
Rivet and washer	Not specified type, broken, loose, not peened or insufficiently peened over washer affecting serviceability or appearance.
Engraving	Missing, misspelled or illegible.
	Letters not V incised.
	Wrong size or improperly spaced.
	Out of alignment, or not in proper location.
	Off center.
	Wrong type.
	Burr or burrs not removed.

4.3.2.1.2 *Examination of trophy for defects in dimensions.* Any dimension that is not within the specified tolerances shall be classified as a defect.

4.3.2.1.3 *Inspection levels and AQL's.* The inspection levels and acceptable quality levels (AQL's) expressed in defects per hundred units shall be as follows:

	Inspection level	*AQL*
For defects applicable to 4.3.2.1.1	Unless otherwise specified in the contract or order, 100 percent inspection shall be performed for visual characteristics.	
For defects applicable to 4.3.2.1.2	L6	4.0
For defects applicable to 4.3.3	L4	4.0

4.3.2.2 *Testing of the end item.* Testing of the completely fabricated trophy shall be performed in accordance with table III for the characteristics shown therein. The sample unit shall be one completely fabricated trophy.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:17Z
Check the source to verify that this is the current version before use.

TABLE III. *Testing of the end item*

Characteristic	Requirement paragraph	Test method	Requirement applicable to		Number determinations per sample unit	Results reported as	Inspection level	AQL
			Individual unit	Lot average				
Acid test for gold plating.	3.5.2	4.4.1	X	.....	1	Pass or fail.	L1	6.5
Liver of Sulfur test.	3.5.4	4.4.2.1	X	.....	1	Pass or fail.	L1	6.5
Tackiness test.	3.5.4	4.4.2.2	X	.....	1	Pass or fail.	L1	6.5

4.3.3 *Examination of preparation for delivery.* An examination will be made to determine that packaging, packing and marking as required by section 5 of this specification and as otherwise required in the contract or order are complied with. Defects will be scored in accordance with the table IV. The sample unit shall be one shipping container fully prepared for delivery. The lot size shall be the number of containers in the inspection lot.

TABLE IV. *Examination of preparation for delivery*

Examine	Defect
Markings, exterior and interior	Incorrect; illegible; of improper size, location sequence, or method application.
Materials	Any nonconforming component; component missing, damaged, or otherwise defective affecting serviceability.
Workmanship	Inadequate application of components such as incomplete closure of case liners, container flaps, loose strapping, bulging or distortion of containers.
Weight and content, exterior and interior	Number per container is more or less than required; weight exceeds requirement.

4.4 Tests.

4.4.1 *Acid test for gold plating.* Items selected shall be unlacquered or have the lacquer removed with an organic solvent. Test acid shall consist of a solution of 50 percent by volume of chemically pure nitric acid (specific gravity 1.42) and an equal volume of distilled water. Drops of the acid shall be applied at room temperature and acid shall be left on the items for not less than 2 minutes, during which the items shall be inspected to determine compliance with the requirements specified in 3.5.2.

4.4.2 *Lacquer tests.*

4.4.2.1 *Liver of sulfur.* Items selected shall be immersed in a 2 percent by weight liver of sulfur (potassium sulfide) water solution at a temperature of 100° to 110°F. for a period of 3 minutes. Items shall then be removed and rinsed in warm, then cold, then hot water, after which they shall be wiped gently with an absorbant cellulose material; whirled to remove residual moisture and allowed to air dry at room temperature for 1 hour. Items shall then be inspected to determine compliance with the requirements specified in 3.5.4.

4.4.2.2 *Tackiness test.* A piece of tissue paper shall be pressed against the lacquered surface with any pressure capable of being exerted by the thumb and 2 fingers. After 30 seconds pressure shall be released and items inspected to determine compliance with the requirements specified in 3.5.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:17Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

5.1.1 *Level A.* Each trophy shall be placed in a snug-fitting drawstring bag fabricated of cotton flannel. Each bagged trophy shall be completely wrapped in two thicknesses of tissue wrapping paper conforming to type I, grade A, class 1 of Specification UU–P–553. The wrapped trophy shall then be placed in a setup paperboard box conforming to type I, class A, style 4 of Specification PPP–B–676. The inside dimensions of the box shall be 7 inches in length, 4¼ inches in width, and 4¼ inches in depth. Each box shall be closed in accordance with the appendix of the box specification.

5.1.2 *Level C.* Trophies shall be packaged in accordance with the industry's practice.

5.2 Packing. Packing shall be level B, or C as specified (see 6.2).

5.2.1 *Level A.* Not applicable.

5.2.2 *Level B.* Trophies, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to type I or II, class 1, style RSC of Specification PPP–B–636, except that the minimum bursting strength of the fiberboard shall be 275 psi. All flaps of the fiberboard shipping containers shall be securely sealed with an adhesive commercially used for the specific product being packed by application throughout the entire area of contact between the flaps or by a combination of metal stitching the bottom flaps and sealing the top flaps with adhesive. The net weight of contents of the shipping container shall not exceed 65 pounds.

5.2.3 *Level C.* Trophies, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination. Containers shall be in accordance with Uniform Freight Classification Rules or regulations of other carriers applicable to the mode of transportation.

5.3 Marking. In addition to any special marking required by the contractor or order, interior packages and shipping containers shall be marked in accordance with Standard MIL–STD–129.

6. NOTES

6.1 Intended use. The trophy covered by this specification is awarded annually to the outstanding National Guard Unit in each state as tangible evidence that the unit has received an Eisenhower Award.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.

(b) When a standard sample is not to be furnished (see 3.1).

(c) Whether preproduction sample is waived (see 3.2).

(d) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

Notice. When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Custodian:
Army—Quartermaster Corps

Preparing activity:
Army—Quartermaster Corps

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:17Z
Check the source to verify that this is the current version before use.

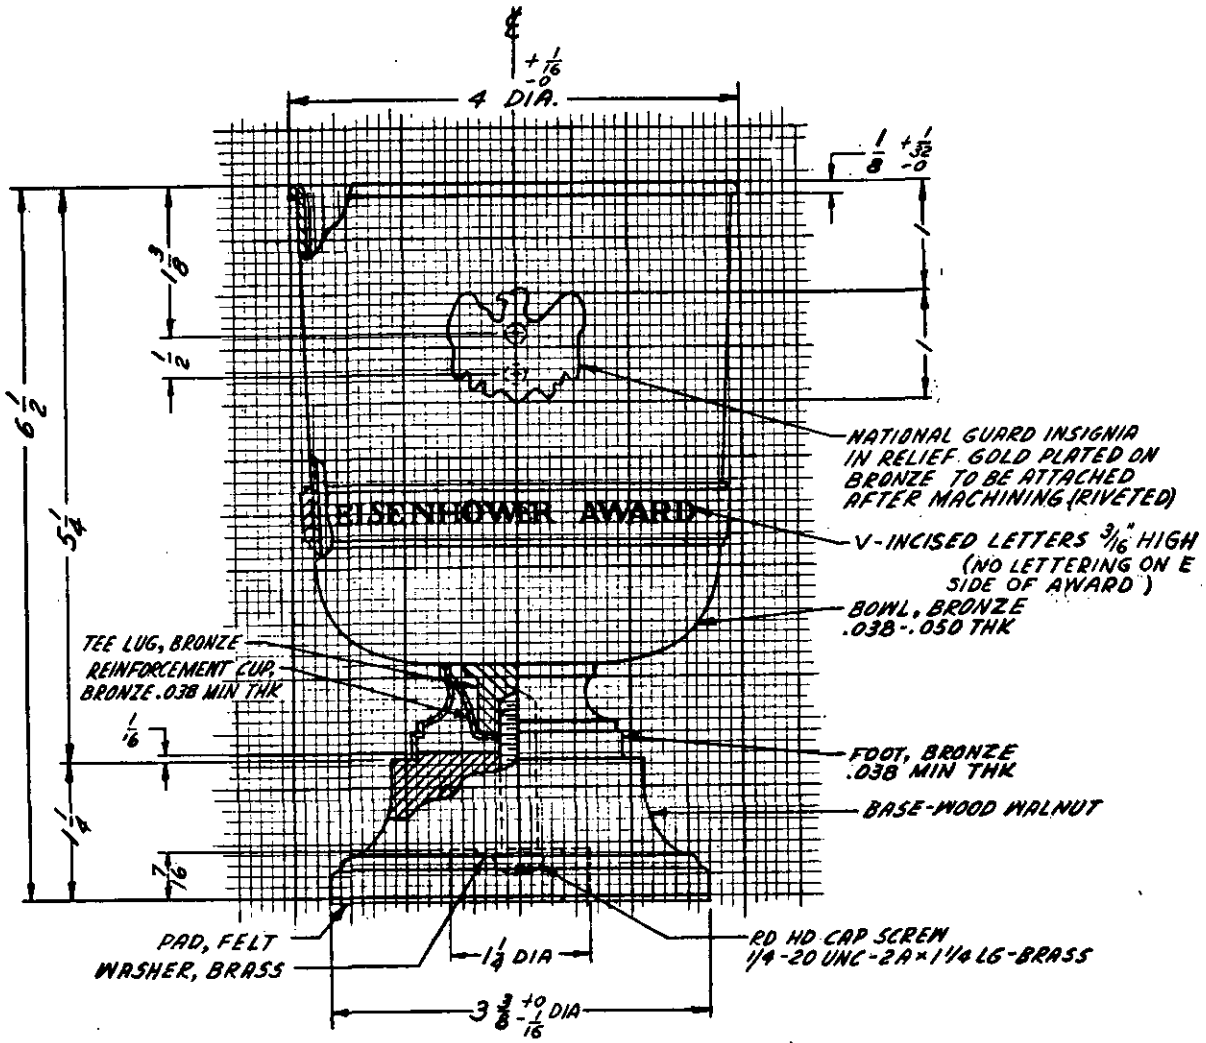


FIGURE 1. *Trophy, national guard, Eisenhower award*

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:17Z
Check the source to verify that this is the current version before use.