MILITARY SPECIFICATION

MICROCIRCUITS, DIGITAL, LOW POWER SCHOTTKY, TTL, MONOSTABLE MULTIVIBRATORS, MONOLITHIC SILICON

This amendment forms a part of Military Specification MIL-M-38510/314B, dated 23 May 1984, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 2

1.3, Thermal resistance, delete and substitute the following:

"Thermal resistance, junction-to-case (θ_{JC}):

Cases A, B, C, D, E, F - - - - - - - - - - - (See MIL-M-38510, appendix C)

Case 2 - - - - - - - - - - - - - - - - - - - 60°C/W 2/"

1.3, after "Junction temperature (T_J)" add: "3/".

1.4, after "Supply voltage" add: "(V_{CC})".

At bottom of page, add footnotes 2/ and 3/ as follows:

"2/ When a thermal resistance value is included in MIL-M-38510, appendix C, it shall supersede the value stated herein.

"3/ Maximum junction temperature shall not be exceeded except for allowable short duration burn-in screening conditions per method 5004 of MIL-STD-883."

PAGE 3

TABLE I, Low-level input current at A_{IN}, I_{IL2}, Device type 02, Max limit column: Delete "-340" and substitute "-400".

PAGE 5

3.2.3, delete and substitute the following:

"3.2.3 Schematic circuits. Schematic circuits shall be submitted to the preparing activity prior to inclusion of a manufacturer's device in the specification and shall be submitted to the qualifying activity and agent activity (DESC-ECS) as a prerequisite for qualification. All qualified manufacturers' schematics shall be maintained by the agent activity and will be available upon request."

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:07Z
Check the source to verify that this is the current version before use.

TABLE II, delete and substitute:

"TABLE II. Electrical test requirements.

MIL-STD-883 test requirements	Subgroups (see table III)	
	Class S devices	Class B devices
Interim electrical parameters (pre burn-in) (method 5004)	1	1
Final electrical test parameters (method 5004)	1*,2,3,7,9,10,11	1*,2,3,7,9
Group A test requirements (method 5005)	1,2,3,7,8,9,10,11	1,2,3,7,8,9
Group B test requirements (method 5005) subgroup 5	1,2,3,9 10,11	N/A
Group C end-point electrical parameters (method 5005)	N/A	1,2,3
Additional electrical subgroups for group C inspections	N/A	10,11
Group D end-point electrical parameters (method 5005)	1,2,3	1,2,3

*PDA applies to subgroup 1 (see 4.2c)."

PAGE 6

4.2.a(1) and 4.4.3.b(1): After "Test condition D" add "or E".

PAGE 12

FIGURE 2, TYPICAL OUTPUT PULSE WIDTH vs EXTERNAL TIMING CAPACITANCE graph: Delete and substitute new graph as shown on page 3 of this amendment.

PAGE 27

6.1, delete in its entirety.

Custodians:
Army - ER
Navy - EC
Air Force - 17

Review activities:
Army - AR, MI
Navy - SH, OS
Air Force - 11, 19, 35, 99
DLA - ES

User activities:
Army - SM
Navy - AS, CG, MC


Agent:
DLA - ES

Preparing activity:
Air Force - 17

(Project 5962-0770)

Source: https://assist.dla.mil -- Downloaded: 2026l0-21T14:07Z
Check the source to verify that this is the current version before use.

TYPICAL OUTPUT PULSE WIDTH
vs
EXTERNAL TIMING CAPACITANCE

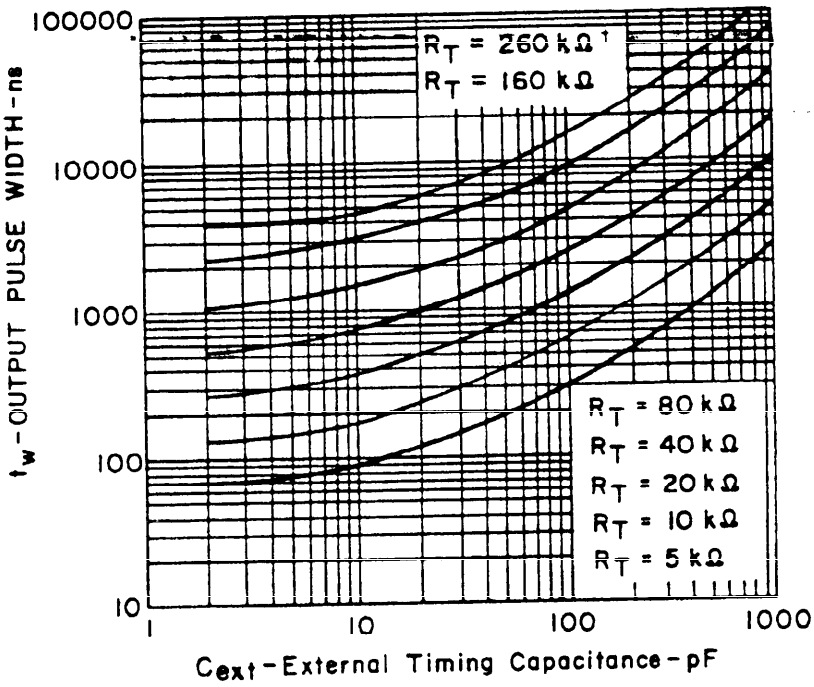

† This value of resistance exceeds the maximum recommended for use over the full temperature range

☆U.S. GOVERNMENT PRINTING OFFICE 1985 — 506-038/22055

Source: https://assist.dla.mil -- Downloaded: 202610-21T14:07Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:07Z
Check the source to verify that this is the current version before use.