MILITARY SPECIFICATION

LINK, CARTRIDGE, METALLIC BELT, 20MM: M10

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers one type of metallic belt link intended to hold 20 millimeter (mm) ammunition in the form of flexible belts for use in M24A1 and M3 type 20MM automatic weapons systems.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. Unless otherwise specified, the following specifications and standards of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation form a part of this specification to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-W-13855	-	Weapons, Small Arms, General Specification for
DoD-P-16232	-	Phosphate, Coating, Heavy, Manganese or Zinc Base
MIL-A-48078	-	Ammunition, Standard Quality Assurance Provisions, General Specification for

FSC 1305

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, US Army Armament Research and Development Center, Attn. DRSMC-QA, Dover, New Jersey 07801 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:19Z
Check the source to verify that this is the current version before use.

STANDARDS

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-1168	-	Lot Numbering of Ammunition

2.1.2 Other Government documents, drawings and publications. The following other Government documents, drawings and publications form a part of this specification to the extent specified herein.

DRAWINGS (See 6.4)

U.S. Army Armament Research & Development Center (ARDC)

Product and Packaging Drawings

7238242	-	Link, Cartridge, Metallic Belt, 20MM: M10
P7238242	-	Packaging Data Sheet for Link, Cartridge, Metallic Belt, 20MM: M10
7305535	-	Filler (Link, M10)
P7305535	-	Packaging Data Sheet for Filler (Link, M10)
7259187	-	Methods of Linking Cartridges, 20MM, in Links, Metallic Belt, M10

Inspection Equipment Drawings

7243236	-	Special Snap Gage
7243239	-	Gage, Receiving
7243240	-	Special Plug Gage
7243243	-	Pull Test Fixture
7244671	-	Special Plug Gage
7244676	-	Gage, Receiving

(Copies of specifications, standards, handbooks, drawings and publications required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:19Z
Check the source to verify that this is the current version before use.

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on the date of invitation for bids or request for proposal shall apply.

AMERICAN SOCIETY FOR TESTING AND MATERIALS

ASTM E18	-	Test for Rockwell Hardness and Rockwell Superficial Hardness of Metallic Materials
ASTM B117	-	Method of Test for Salt Spray (Fog) Testing

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA, 19103).

Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using federal agencies.

2.3 Order of precedence. In the event of a conflict between the text of this specification and the reference cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 Materials. Materials shall be in accordance with the applicable drawings and specifications.

3.2 Components. The links and fillers shall comply with all requirements specified on drawings 7238242 and 7305535 and associated drawings and with all requirements specified in applicable specifications and standards.

3.3 Manufacturing process. The links shall be manufactured by the identical process used for first article sample and no deviation from the process shall be made without prior approval of the contracting officer.

3.4 Pull and elongation. Finished links shall be capable of withstanding 125 pounds tensile load without fracture. When tensile load is applied, the pitch dimension shall not exceed .010 max permanent set after test. The test shall be performed as specified in 4.5.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:19Z
Check the source to verify that this is the current version before use.

3.5 Free hinging. Links assembled into belts of 50 links each using (M204, M210 or M90 Series-preferably M18, Dummy) 20mm, cartridges shall hinge and fold over without binding, kinking, separating or any interference. The test shall be performed as specified in 4.5.5.

3.6 Functioning. The M10 links shall be capable of being assembled into belts with 20MM cartridges (M204, M210 or M90 series), and shall operate three (3) times in any 20MM gun systems designed for use with M10 Links. The links shall not crack, break, separate or cause a malfunction. The test shall be performed as specified in 4.5.6.

3.7 Belting. The links when belted with 20mm cartridges shall comply with the dimensional requirement as specified on dwg. 7259187.

3.8 Marking. The links shall be marked in accordance with Drawing (Dwg) 7238242. In addition, the links shall be identified with the inspection lot number as specified in MIL-STD-1168.

3.9 First article inspection. This specification contains technical provisions for first article inspection. Requirements for the submission of first article samples by the contractor shall be as specified in the contract.

3.10 Workmanship. Workmanship shall be in accordance with MIL-W-13855. Cracks, tears, burrs and deformations shall not exceed the limits specified in 6.6.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection and standard quality assurance provisions. Unless otherwise specified herein or in the contract, the provisions of MIL-A-48078 shall apply and are hereby made a part of this detail specification.

4.2 Classification of inspections. The following types of inspection shall be conducted on this item.

a. First Article Inspection (4.3)
b. Quality Conformance Inspection (4.4)

4.3 First article inspection.

4.3.1 Submission. The contractor shall submit a first article as designated by the Contracting Officer for evaluation in accordance with the provisions of 4.3.2. The first article sample shall consist of the following items in sample quantities as indicated.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:19Z
Check the source to verify that this is the current version before use.

Part Description	Drawing	Quantity
Link, Cartridge, Metallic Belt, 20MM: M10	7238242	1063
Filler (Link, M10)	7305535	263

4.3.2 Inspections to be performed. See MIL-A-48078 and Table I specified herein.

4.3.3 Rejection. Rejection of the first article sample shall be in accordance with Table I and MIL-A-48078.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:19Z
Check the source to verify that this is the current version before use.

TABLE I. First article inspection

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
	Link, Cartridge, Metallic Belt, 20MM, M10				SEE BELOW
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Link,Cartridge, Metallic Belt, 20MM, M10 (Dwg. 7238242)				
	Examination for defects	200	ACC-0 REJ-1	3.2	4.4.2.1 (101-110)
	Decarburization	5	ACC-0 REJ-1	3.2	4.5.1
	Salt Spray	8	ACC-0 REJ-1	3.2	4.5.2
	Hardness	50	ACC-0 REJ-1	3.2	4.5.3
	Pull and Elongation	200	ACC-1 REJ-2	3.4	4.5.4/7243243
	Free Hinging	400	ACC-0 REJ-1	3.5/3.7	4.5.5
	Functioning	200	ACC-0 REJ-1	3.6/3.7	4.5.6

NOTES:

DRSMC-QA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:19Z
Check the source to verify that this is the current version before use.

TABLE I. First article inspection

MIL-L-11536D

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
	Filler (Link, M10)				SEE BELOW
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Filler-Dwg 7305535				
	Examination for defects	200	ACC-0 REJ-1	3.2	4.4.2.2 (101-106)
	Decarburization	5	ACC-0 REJ-1	3.2	4.5.1
	Salt Spray	8	ACC-0 REJ-1	3.2	4.5.2
	Hardness	50	ACC-0 REJ-1	3.2	4.5.3

NOTES:

DRSMC-QA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:19Z
Check the source to verify that this is the current version before use.

4.4 Quality Conformance Inspection.

4.4.1 Inspection lot formation. Inspection lots shall comply with the lot formation provisions of MIL-A-48078 and MIL-W-13855. In addition, inspection lots shall not exceed 500,000 links.

4.4.1.1 Heat treat lot. The heat treat lot shall be limited to one heat of steel and shall consist of links heat treated in a batch type furnace at one charge or in a continuous type of furnace during an uninterrrupted period extending over not more than one ten hour period.

4.4.2 Examination. See MIL-A-48078.

a. Sampling plans. Unless otherwise specified in the Classification of Defects and Test Tables, sampling plans and procedures for major and minor defects shall be in accordance with MIL-STD-105, Inspection Level II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:19Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-L-11536D

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.1	Link, Cartridge, Metallic Belt, 20MM, M10	1 OF 2	7238242
			NEXT HIGHER ASSEMBLY: 7259187

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined.				
MAJOR					
101.	Center distance loop and height of ears		.65%	3.2	7244676
102.	Overall at double loops, Max		.65%	3.2	Gage
103.	Overall at ears, Min		.65%	3.2	7243236
104.	Loop openings, Max		.65%	3.2	Gage
105.	Slot between loops, Min		.65%	3.2	Gage
106.	Diameter, rear and front loops		.65%	3.2	Gage
107.	Diameter, connecting loop		.65%	3.2	Gage
108.	Radius, inside flange, Min		.65%	3.2	7243239
109.	Radius, outside flange, Max		.65%	3.2	7243240
110.	Clearance Radius		.65%	3.2	7244671
	TESTS				
111.	Decarburization	5 1/	ACC-0 REJ-1	3.2	4.5.1
112.	Salt Spray.	2/	2/	3.2	4.5.2
113.	Hardness	1/3/	.40%	3.2	4.5.3

NOTES: 1/ Selected from each heat treat lot (See 4.4.1.1).
2/ Procedure, sampling and rejection shall be in accordance with the salt spray test (accelerated corrosion resistance) in DOD-P-16232.
3/ Samples shall be in accordance with MIL-STD-105, Level S-3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:19Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-L-11536D

PARAGRAPH	TITLE		SHEET 2 OF 2		DRAWING NUMBER 7238242
4.4.2.1	Link, Cartridge, Metallic, Belt, 20MM, M10				NEXT HIGHER ASSEMBLY 7259187
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
114.	Elongation	200	ACC-2 REJ-3	3.4	4.5.4 /7243243
115.	Free Hinging	400	ACC-0 REJ-1	3.5/3.7	4.5.5
MINOR					
201.	Incorrect, Missing or Illegible Marking		1.50%	3.8	Visual
202.	Incorrect or Missing Protective Finish		2.50%	3.2	Visual
203.	Evidence of Poor Workmanship, Crack, Tears, Burrs and Deformations		4.00%	3.10	Visual/6.6

NOTES:

DRSMC-QA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:19Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-L-11536D

PARAGRAPH	TITLE		SHEET		DRAWING NUMBER
4.4.2.2	Filler (Link, M10)		1 OF 1		7305535
					NEXT HIGHER ASSEMBLY 7259187
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined.				
MAJOR					
101.	Inside Diameter		.65%	3.2	Gage
102.	Height (℄ to Flat)		.65%	3.2	Gage
103.	Presence of retaining tabs		.65%	3.2	Visual
	TESTS				
104.	Decarburization	5 1/	ACC-0 REJ-1	3.2	4.5.1
105.	Salt Spray	2/	2/	3.2	4.5.2
106.	Hardness	1/3/	.40%	3.2	4.5.3
MINOR					
201.	Width, Overall		1.50%	3.2	Gage
202.	Incorrect or missing protective finish		2.50%	3.2	Visual
203.	Evidence of poor workmanship, cracks tear, burrs and deformations		4.00%	3.10	Visual/6.6

NOTES: 1/ Selected from each heat treat lot (see 4.4.1.1)

2/ Procedure, sampling and rejection shall be in accordance with the salt spray test (accelerated corrosion resistance) in DOD-P-16232.

3/ Samples shall be in accordance with MIL-STD-105, Level S-3.

DRDAR-QA Form 160a, 1 Jun 83

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:19Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-L-11536D

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.3	Packaging Data Sheet: Link, Cartridge Metallic Belt, 20MM: M10				P7238242
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined.				
MAJOR	None defined.				
MINOR					
201.	Improper level of packaging and packing		1.50%	3.2	Visual
202.	Incorrect, missing or illegible markings on containers		1.50%	3.2	Visual
203.	Inadequate cleaning or drying of links		1.50%	3.2	Visual
204.	Unit container interior contaminated with dirt, lint, or other foreign matter				
205.	Improper orientation of links in unit container		1.50%	3.2	Visual
206.	Layers of links not separated properly		1.50%	3.2	Visual
207.	Improper closure of unit container		1.50%	3.2	Visual
208.	Improper packing of unit containers		1.50%	3.2	Visual

NOTES:

DRSMC-QA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:19Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-L-11536D

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.4	Packaging Data Sheet: Filler (Link, M10)	1 OF 1	P7305535
			NEXT HIGHER ASSEMBLY

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined.				
MAJOR	None defined.				
MINOR					
201.	Improper level of packaging and packing		1.50%	3.2	Visual
202.	Incorrect, missing or illegible markings on containers		1.50%	3.2	Visual
203.	Inadequate cleaning or drying of fillers		1.50%	3.2	Visual
204.	Unit container interior contaminated with dirt, lint, or other foreign matter				
205.	Improper closure of unit container		1.50%	3.2	Visual
206.	Improper packing of unit containers		1.50%	3.2	Visual

NOTES:

DRSMC-QA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:19Z
Check the source to verify that this is the current version before use.

4.4.3 Tests. Testing is described in the First Article and Quality Conformance Inspection Tables.

4.4.4 Inspection equipment. The inspection equipment required to perform the examinations and tests prescribed herein is described in the "Paragraph Reference/Inspection Method" column in the tables starting with 4.4.2.1. The contractor shall submit for approval inspection equipment designs in accordance with the terms of the contract. See Section 6 of MIL-A-48078 and 6.3 herein.

4.5 Method of inspection.

4.5.1 Decarburization. The cross section of the sample link shall be polished, etched with 3 to 5% Nital solution and examined under a microscope of not less than 500 power. Observation shall be made for compliance with the applicable drawing requirement.

4.5.2 Salt spray. Salt spray testing shall be conducted in accordance with ASTM Method B117. Observation shall be made for compliance with the applicable requirement in DOD-P-16232.

4.5.3 Hardness. Hardness testing shall be conducted in accordance with ASTM Method E18. Observation shall be made for compliance with the applicable drawing requirement.

4.5.4 Pull and elongation test. The pitch dimension shall be recorded, the link shall be assembled to the test fixture specified herein, and the applicable load shall be gradually applied at a uniform rate to that specified (see 3.4). The full load shall then be removed and the load and pitch dimension shall be recorded and measured. Observation shall be made for compliance with the requirement specified in paragraph 3.4. In addition, observation shall be made for link fracture. Upon completion of the test, link so tested shall be scraped.

4.5.5 Free hinging test. The sample links shall be tested by assembling the links with (M204, M210 or M90 series-preferably M18, Dummy) 20mm, cartridges into belts of 50 linked cartridges. Each belt shall be laid horizontally to its full length, with the open side of the links up, and one end shall be drawn back upon the remainder of the belt until the belt is completely reversed (open side of links down). One end of the reversed belt shall then be drawn back upon the remainder of the belt until the belt is returned to its original (open side of links up) position. Observation shall be made for compliance with the applicable specification requirement.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:19Z
Check the source to verify that this is the current version before use.

4.5.6 Functioning. The sample of 200 M10 links shall be assembled three (3) times into belts using cartridges, 20MM, TP, M99A1 and tested by the government. The belts shall be fired in bursts of 50 rounds in the M24A1 Automatic Gun.

5 PACKAGING

5.1 Preservation and packaging. The links and fillers shall be preserved and packaged for shipment in accordance with Packaging Data Sheets P7238242 and P7305535 with levels as specified in the contract (See 6.1).

5.2 Packing. The links and fillers shall be packed in accordance with Packaging Data Sheets P7238242 and P7305535 with levels as specified in the contract (See 6.1).

5.3 Marking. Marking shall be in accordance with Packaging Data Sheets P7238242 and P7305535.

5.4 Shipping. When shipments from more than one lot are shipped as a carload, each lot shall be kept separate and the division between lots clearly indicated to prevent mixing of the lots in transit.

6. NOTES

6.1 Intended use. The component covered by this specification is intended for use with the M204, M210 and M90 series 20mm cartridges.

6.2 Ordering data. See MIL-A-48078.

6.3 Submission of inspection equipment designs for approval. See MIL-A-48078. Submit equipment designs as required to Commander, ATTN: AMSMC-QAF-I(D), US Army Armament Research and Development Center (ARDC), Dover, NJ 07801-5001.

6.4 Drawings. Drawings listed in Section 2 of this specification under the heading US Army Armament Research and Development Center (ARDC) may also include drawings prepared by, and identified as Edgewood Arsenal, Frankford Arsenal, Rock Island Arsenal, Picatinny Arsenal, or US Army Armament Research and Development Command (ARRADCOM) drawings. Technical data originally prepared by these activities are now under the cognizance of ARDC.

6.5 Process deviation. A process deviation is defined as a change in the approved basic method of manufacture or an operational change which may alter the metallurgical or physical properties of the item.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:19Z
Check the source to verify that this is the current version before use.

6.6 Definition of terms.


6.6.1 Deformed link. A link whose shape or dimensions or both have been mutilated or altered by processing to the extent that it is unsuitable for its intended use.


6.6.2 Cracks - tears. See Figures 1 and 2.

6.6.3 Burrs. Any rough edge on any part of the link which, in the opinion of the Government representative, would produce a definite removal of metal from a cartridge case or which would injure personnel in handling.

6.7 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:19Z
Check the source to verify that this is the current version before use.

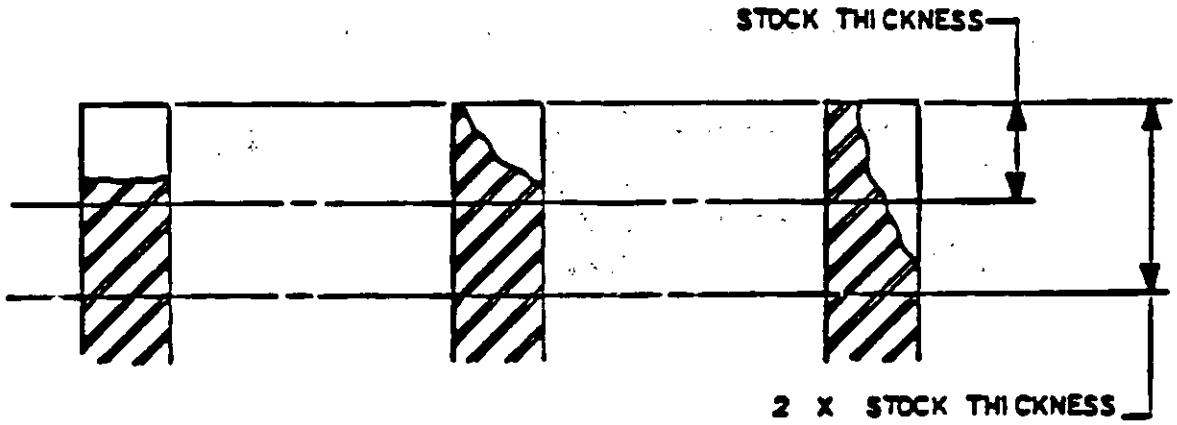

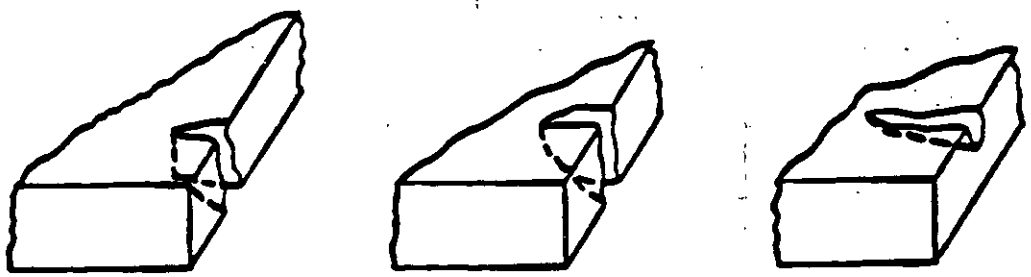


ALL ACCEPTABLE

CRACKS-TEARS

FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:19Z
Check the source to verify that this is the current version before use.

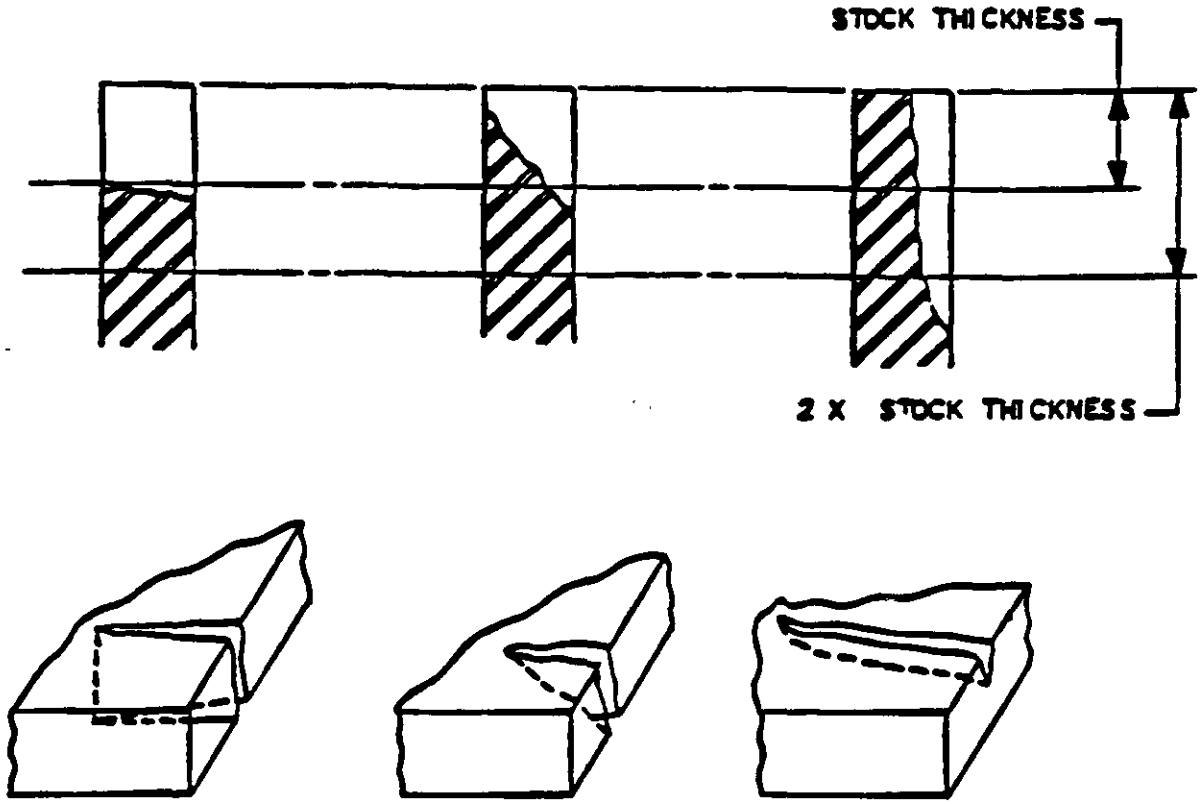

ALL NOT ACCEPTABLE

CRACKS-TEARS

FIGURE 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:19Z
Check the source to verify that this is the current version before use.

Custodian:
Army-AR
Air Force-99
Navy

Review Activities:
Army-AR
Navy

Preparing Activity:
Army-AR

(Project 1305-AB24)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:19Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

COMMANDER
US ARMY ARMAMENT MUNITIONS & CHEMICAL COMMAND
ATTN: DRSMC-QA
DOVER, NJ 07801 5001

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:19Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-L-11536D	LINK, CARTRIDGE, METALLIC BELT, 20MM: M10

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:19Z
Check the source to verify that this is the current version before use.