MIL-R-11567D

29 March 1974
SUPERSEDING
MIL-R-11567C
29 September 1966

MILITARY SPECIFICATION

REPAIR KIT, STEEL MEASURING TAPE, WITH CASE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers a kit for repairing steel measuring tapes.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

	V-T-285	- Thread, Polyester.
	CCC-C-419	- Cloth, Duck, Cotton, Unbleached, Plied-Yarns, Army and Numbered.
	CCC-D-950	- Dyeing and Aftertreating Processes for Cotton Cloth.
	GGG-H-86	- Hammers, Hand (Forged Steel Head).
	GGG-S-291	- Shears, Metal Cutting; Bench and Hand.
*	PPP-T-45	- Tape, Gummed, Paper, Reinforced and Plain, Sealing and Security.
	PPP-T-60	- Tape; Pressure-Sensitive Adhesive, Waterproof, for Packaging.
*	PPP-B-636	- Boxes, Shipping, Fiberboard.

MILITARY

	MIL-P-116	- Preservation, Methods of.
	MIL-B-121	- Barrier-Material, Greaseproofed, Waterproofed, Flexible.
	MIL-C-496	- Clips, End, Strap.
	MIL-W-530	- Webbing, Textile, Cotton, General Purpose, Natural or in Colors.
	MIL-B-543	- Buckles, Tongueless and Web Strap.
*	MIL-T-43566	- Tape, Textile, Cotton, General Purpose, Natural or in Colors.

FSC 521

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:20Z
Check the source to verify that this is the current version before use.

STANDARDS

FEDERAL

Fed. Std. No. 66 - Steel; Chemical Composition and Hardenability.
Fed. Std. No. 751 - Stitches, Seams and Stitchings.

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

* 2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply:

American Society for Testing and Materials (ASTM)

E18 - Methods of Test for - Rockwell Hardness and Rockwell Superficial Hardness of Metallic Materials

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

National Motor Freight Traffic Association, Inc., Agent

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Associations, Inc., Tariff Order Section, 1616 P Street, N.W., Washington, DC 20036.)

Uniform Classification Committee, Agent

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:20Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

* 3.1 First article. When specified (see 6.2), the supplier shall furnish a sample of the item to be procured under this specification for first article inspection and approval (see 4.3 and 6.3).

* 3.2 Standard product. The repair kit delivered under this specification shall be the manufacturer's commercial product, except for any changes necessary to comply with specification requirements. All like items furnished on any one contract shall be new and interchangeable.

* 3.3 Materials and components. Materials and components shall be as specified herein. Materials not definitely specified shall be of the quality normally used by the manufacture in his standard commercial repair kit provide that the completed item complies with all provisions of this specification. The assembled kit shall consist of the components listed in table I.

TABLE I. Component parts

Illustration number on figure 1	Item	Quantity per unit
1	Block, punch and riveting, with punch installed	1
2	Punches, plunger type, for replacements	2
3	Hammer, 4-ounce	1
4	Rivet set	1
5	Rivets, in metal container	1000
6	Shears, pair, 8 inch	1
7	Sleeves, tape repair, 1/4, 5/16 and 3/8 inch (4 each size)	12
8	Tape, repair pieces, steel	31 (see table
9	Tweezers, pair, 3-inch	1
10	Case, carrying	1

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:20Z
Check the source to verify that this is the current version before use.

3.3.1 Cloth, duck, cotton. Cotton duck used to fabricate the case shall be 12.29 ounces per square yard conforming to type III of CCC-C-419.

3.3.1.1 Color and treatment. The cloth shall be dyed olive drab shade No. 7 and shall conform to type I, class B of CCC-D-950.

* 3.3.2 Tape, textile, cotton. The tape shall be olive drab shade No. 7 and shall conform to type I, class 4, 3/4-inch width of MIL-T-43566.

3.3.3 Webbing, textile, cotton. The webbing shall be dyed olive drab shade No. 7 and shall conform to type IIb, class 4, 5/8-inch width of MIL-W-530.

* 3.3.4 Thread, polyester. The thread for all stitching shall conform to type I, class 1, sub-class B, size F, shade S-1 (Cable No. 66022) of V-T-285. The dyed thread shall be capable of maintaining good fastness to weathering or light.

3.3.5 Buckle. The buckle shall conform to type III, style 2, class 1, 3/4 inch size of MIL-B-543.

3.3.6 Clip, end. The end clip shall be brass, conforming to type I, size 3/4 inch of MIL-C-496.

* 3.3.7 Block, insert, and punch. The block, insert, and punch shall be steel conforming to composition 1050 or above of Fed. Std. No. 66.

* 3.3.8 Tape repair sleeves. The tape repair sleeves shall be steel commercial grade, normally used for repairing broken tapes.

3.3.9 Hammer. The hammer shall conform to type II, class 1, style A, 4 ounces as specified in GGG-H-86, except that the overall length shall be approximately 8 inches.

3.3.10 Rivets. The rivets shall be annealed steel, commercial grade, oval-head type. The shank shall be approximately 3/64 inch in diameter and 1/16 inch in length.

3.3.11 Shears, 8-inch. The shears shall conform to type II, class 1, style B of GGG-S-291. The overall length of the shears shall be approximately 8 inches.

3.3.12 Tweezers. Tweezers shall be commercial grade, spring tempered steel, nickel plated, with a blunt point of approximately 1/16-inch width and an overall length of approximately 3 inches.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:20Z
Check the source to verify that this is the current version before use.

3.4 Construction.

* 3.4.1 Carrying case. The carrying case body and pockets shall be fabricated from cotton duck specified in 3.3.1 and shall measure 12 inches in width by 13-1/2 inches from the bottom of the case to the top of the open flap, with an acceptable tolerance of plus or minus 1/4 inch. The corners of the flap shall b rounded.

3.4.1.1 Machine stitching. Stitching, using thread specified in 3.3.4, shall conform to type 301, 6 to 8 stitches per inch of Fed. Std. No. 751 except that type 304 or 301 stitching shall be used on the case binding. The addition of any lubricant to the polyester thread prior to or during sewing operation shall not be allowed.

3.4.1.2 Thread breaks. Thread breaks in stitching shall be overstitched not less than 1-inch at each break.

3.4.1.3 Stitching ends. Stitching at the ends shall be overstitched not less than 1 inch except where ends are turned under in a hem, held down by other stitching, or where stitching is performed automatically when stitch patterns such as box, box with cross stitch, "W" stitching or straight line tacking are performed automatically. At least three or more tying, overlapping, or backstitches shall be used to secure the ends of stitching.

* 3.4.1.4 Pockets. The pockets of the carrying case as shown in Figure 1 shall be of suitable widths to accommodate the specified repair kit components numbers 1 through 9 in Figure 1. The depth of the pockets shall be 6-3/8 inches, plus or minus 1/8 inch. The top of the pocket shall be hemmed with seam type EFa-1. The sides shall be seamed with seam type SSa-1.

3.4.1.5 Binding. The binding for sides and flap of the carrying case shall be bound with tape specified in 3.3.2 and seamed with seam type BSa-1 1/8-inch from the inner edge of the binding.

* 3.4.1.6 Security strap, with buckle and end clip. The 5/8-inch securing strap with buckle and end clip, for securing the contents after the case is folded shall be fabricated of the webbing specified in 3.3.3. One end of the strap, cut to a length of 13-1/2 inches, shall be inserted to the full depth of the end clip specified in 3.3.6 so that the webbing shall be flat at the point of entrance. The clip shall then be securely attached to the strap without cutting the webbing. The outer end of the strap shall be inserted through the buckle specified in 3.3.5, turned back 1-3/4 inches and stitched with a

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:20Z
Check the source to verify that this is the current version before use.

1/2-inch ± 1/16 inch bartack, with 28 stitches per bartack, centered 1-1/4 inches from the folded edge, or with a 3/4-inch by 3/8-inch box stitch centered as for the bartack. The securing strap shall be horizontally positioned on back of the base with the center of the strap 4 inches plus or minus 1/8-inch from the bottom of the case and with the buckle end extending approximately 3 inches from the edge of the case. The strap shall be stitched to the case with two 1/2-inch ± 1/16-inch bartacks, with 28 stitches per bartack, spaced 1/4-inch apart and centered 2 inches from the edge of the buckle side of the case or with two 3/4-inch by 3/8-inch box stitches spaced 1/4-inch apart and centered as the bartack.

* 3.4.2 Punch and riveting block. The punch and riveting block with insert shall be made of steel specified in 3.3.7.1. The punch and insert shall have a Rockwell hardness of not less than C50 nor more than C55 when tested as specified in 4.5.1. The block shall be provided with (1) a slot in which two pieces of steel measuring tape can be inserted and aligned against the back of the slot; (2) a hole to receive a plunger-type punch; (3) a lever device for resetting the punch; (4) a screw to limit upward motion of the punch; and (5) a hardened steel insert with a concave indentation to fit and set rivet heads. The front face of the block shall be notched so that the lower end of the punch can be seen and accurately located on the tape. The punch and resetting device shall be operated by striking the respective parts with the hammer. The punch shall be of size compatible with the rivets furnished with the kit and capable of punching a hole in a piece of measuring tape made from steel ribbon 0.020 inch thick when struck by a normal blow of the hammer. The punch shall be of sufficient length to pass through two thicknesses of spliced overlapping pieces of steel tape as the punch is inserted in a hole previously made in the top piece of tape and punched through the bottom piece of tape.

* 3.4.3 Rivet set. The rivet set shall be made of the hardened tool steel approximately 3-1/2 inches long and 1/2 inch in diameter. One end shall be tapered for a length of approximately 1-1/8 inches from the 1/2 inch diameter portion to a 1/8 inch diamter tip. The tapered end shall have a concave indentation for forming a head on the rivet. The 1/2 inch diameter portion of the rivet set shall have a knurled surface.

* 3.4.4 Tape repair sleeves. The tape repair sleeves shall be furnished in the sizes and quantities specified in table I. The sleeves shall be made of steel coated on the inside with a low-melting-point soldering compound. When the sleeve is tightly compressed against the tape and heated with an ordinary match, a firm splice shall be formed. The sleeves, and abrasive cloth in quantities normally supplied commercially, shall be furnished in a suitable box having instructions for use printed thereon.

3.4.5 Steel tape, repair pieces. The steel tape repair pieces as listed in table II shall be a minimum length of 6 inches, including the finger ring of the metal eye attached to the end pieces. Three-eighth-inch wide end pieces shall have a finger ring attached to one end and at least 1-inch clear space between the zero graduation and the ring. One-fourth inch wide end pieces

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:20Z
Check the source to verify that this is the current version before use.

shall have a metal eye riveted on one end and at least 6 inches clear space between the zero graduation and the eye. All graduations and numbers shall be in prominent contrast to the background. All repair pieces shall have a black background except as otherwise indicated in table II.

TABLE II. Tape repair pieces

	Quantity	Width (inches)	Graduations
Ends	3	3/8	10th and 100ths of feet.
Ends	2	3/8	Centimeters and millimeters.
Ends	3	3/8	Inches and 8ths.
Ends 1/	2	1/4	None.
Ends	2	1/4	None.
Intermediate	3	3/8	10ths and 100ths of feet.
Intermediate	2	3/8	Centimeters.
Intermediate	3	3/8	Inches and 8ths, from 6 to 12 inches.
Intermediate	2	1/4	None.
Intermediate 1/	2	1/4	10ths and 100ths of feet 2/.
Intermediate	2	1/4	10ths and 100ths of feet 2/.
Intermediate 1/	3	1/4	10ths and 100ths of feet 3/.
Intermediate	2	1/4	10ths and 100ths of feet.

1/ Satin chrome background or black background.

2/ Numbered from zero to 5/10 foot.

3/ Numbered from 5/10 foot to 1 foot.

* 3.4.6 Hammer. The hammer shall be as specified in 3.3.9.

* 3.4.7 Rivets. Rivets shall be as specified in 3.3.10 and stored in a suitable metal container containing a minimum of 100 rivets.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:20Z
Check the source to verify that this is the current version before use.

* 3.4.8 Shears. Shears shall be as specified in 3.3.11.

* 3.4.9 Tweezers. Tweezers shall be as specified in 3.3.12.

* 3.5 Finish. The repair kit components specified in 3.4.1 shall be finished in accordance with the manufacturer's commercial practice unless otherwise specified herein or in referenced documents.

* 3.6 Marking for identification. The carrying case shall be permanently and legibly marked with the supplier's name or trademark and model number of the repair kit, in accordance with the supplier's commercial practice.

* 3.7 Workmanship. Cloth components shall be clean and free of holes, cuts, tears, and cloth defects such as smashes, weak places, broken or missing yarns. Cloth shall be free of shade bar or fine or coarse filling bar. Webbing and tape shall have no frayed or scalloped edges. Thread tension shall be maintained so that there will be no loose stitching. Seam allowances shall be maintained with seams properly sewed so that no run-offs, twists, pleats, puckers or open seams shall result. All thread ends shall be trimmed. Metal components shall be clean and free of burrs, sharp edges (except cutting edges), corroded areas and shall not be broken or malformed.

4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3).
2. Quality conformance inspection (see 4.4).

* 4.3 First article inspection. When a first article is required, the repair kit shall be examined for defects specified in 4.4.2.1 and 4.4.2.2, and tested as specified in 4.5.1. Any nonconformance shall because for rejection of the first article.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:20Z
Check the source to verify that this is the current version before use.

* 4.4 Quality conformance inspection. Except as otherwise specified herein, sampling for inspection shall be performed in accordance with the provisions set forth in MIL-STD-105.

* 4.4.1 Component and material inspection. The supplier shall insure that all components and materials used are manufactured, examined, and tested in accordance with referenced specifications and standards unless excluded, amende modified or qualified in this specification or applicable purchase document.

* 4.4.2 End item inspection. The lot shall be all repair kits offered for inspection at one time.

* 4.4.2.1 Visual examination. The repair kit shall be examined for defects in table III. The inspection level shall be II with an acceptable quality level (AQL) of 2.5 for major defects and 6.5 for total defects expressed in terms of defects per hundred units.

* TABLE III. Classification of defects

Examine	Defect	Classification Major	Minor
Construction and workmanship			
Cloth	Any smash, weak place, broken or missing yarns, multiple floats or open place.	X	
	Shade bar or fine or coarse filling bar.		X
	Hole, cut or tear (except drill hole).	X	
Tape and webbing	Frayed or scalloped edges.		X
Hardware	Broken or malformed, protective.	X	
	Finish omitted, when applicable.		X
	Corroded area, burr, or sharp edge.	X	
End clip	Improperly clinched or webbing not flat at point of entrance into clip.		X
Buckles	Improperly attached.	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:20Z
Check the source to verify that this is the current version before use.

TABLE III. Classification of defects (cont'd)

Examine	Defect	Classification Major	Classification Minor
Construction and workmanship (cont'd)			
Seams and stitching	Seam badly twisted or puckered	X	
	Open seam		
	- more than 1/2 inch but not more than 1 inch.		X
	- more than 1 inch.	X	
	Run-off (see open seams)		
	Raw edges securely caught in stitching where turnunder is required - more than 3/4-inch but not more than 1-1/2 inches.		X
	- more than 1-1/2 inches.	X	
	NOTE: Raw edges not securely caught in stitching shall be classified as open seams.		
	Thread breaks overstitched less than one inch.		X
	NOTE: Thread breaks not overstitched shall be classified as open seams.		
	Needle chews.	X	
Seam and stitch type	Wrong seam or stitch type.	X	
Stitch tension	Loose, resulting in a loosely exposed bobbin or top thread.		X
	Tight, resulting in excessive tightness or puckering.		X
Stitches per inch	One stitch less than minimum specified.		X
	Two or more stitches less than minimum specified.	X	
	One or more stitches in excess of maximum specified.		X
Stitching margins and gage	Not as specified.		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:20Z
Check the source to verify that this is the current version before use.

TABLE III. Classification of defects (cont'd)

Examine	Defect	Classification Major	Classification Mino
Construction and Workmanship (cont'd)			
Stitching ends	Overstitched less than 1 inch except where ends are turned under in a hem, held down by other stitching, or where stitching is performed automatically.		X
	Secured with less than 3 tying, overlapping or back stitches where automatic stitching is performed.		X
Boxstitching	Incomplete		
	- one end row of stitching omitted.		X
	- two end rows of stitching omitted.	X	
	- any other row of stitching omitted.	X	
Components and assembly	Component or stitching operation missing.	X	
Binding	Improperly or loosely applied; ends not finished as specified.		X
Pockets	Partition stitching forming pockets omitted, or obstructing passage.		X
Cleanness	Noticeable grease or oil stains, thread ends not trimmed throughout.		X
Marking	Omitted, incorrect, illegible, wrong location.		X
Contents	Component missing, or not as specified.	X	
	Not clean.	X	
	With rough surface, or rough or sharp edge.		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:20Z
Check the source to verify that this is the current version before use.

* 4.4.2.2 Dimensional examination. The repair kit shall be examined for compliance with dimensions specified. Any dimension not within this specification tolerance shall be a defect. The inspection level shall be S-2 with an AQL of 2.5 defects expressed in terms of defects per hundred units.

* 4.4.2.3 End item testing. The sample punch and insert shall be tested in accordance with 4.5.1 to determine compliance with 3.4.2. Failure to pass the test shall be considered a defect. The inspection level shall be S-2 with an AQL of 2.5 defects per hundred units.

4.4.3 Examination of preparation for delivery. An examination shall be made to determine that preservation, packaging, packing and marking as required by section 5 are complied with. Defects shall be as specified in table IV. The sample unit shall be one shipping container fully prepared for delivery and need not be sealed. The lot shall be the number of containers offered for inspection at one time. The inspection level shall be S-2 with an AQL of 2.5 defects, expressed in terms of defects per hundred units.

TABLE IV. Examination of preparation for delivery

Examine	Defect
Preservation	Preservative improperly applied or missing.
Markings	Omitted, incorrect, illegible, of improper size, location, sequence or method of application.
Workmanship	Reinforcing strapping or banding not properly applied. Adhesive and metal stitching not adequate, not water proofed.
Materials	Component missing or damaged. Barrier material missing.
Content	More or less than required.

4.5 Tests.

* 4.5.1 Hardness test. Hardness shall be determined in accordance with ASTM E18. The hardness value shall be based on the average of 3 determinations made on each punch and insert. Any nonconformance shall constitute failure to pass this test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:20Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging. Preservation and packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A.

* 5.1.1.1 Preservation and component packaging. All exposed, uncoated, ferrous metal surfaces of each component, except rivets, shall be cleaned process C-1 of MIL-P-116 and thoroughly dried. Surfaces, cleaned and dried as specified, shall be coated with type P-7 preservative of MIL-P-116. Surfaces from which preservative might be removed by contact with packaging and packing materials shall be covered, wrapped, or bagged with greaseproof barrier material conforming to type I or II, grade A of MIL-B-121. Barrier material shall be secured with twine made of jute, sisal, manila, or cotton, or with tape conforming to type III, grade A of PPP-T-45, or heat-sealed when heatsealable barrier material is used. Rivets, corrosion-resistant finished components, and repair sleeves shall be packaged in commercial type containers and sealed with tape conforming to PPP-T-60. The packaged components comprising one complete kit shall be placed in their respective pockets of the carrying case and the flaps folded in place. The carrying case shall be laid out flat with straps extended and then folded in thirds beginning at the side opposite the buckle and folding toward the buckle side. The case shall then be secured by engaging the strap and the buckle.

5.1.1.2 Unit package. Each complete kit, preserved and packaged as specified in 5.1.1.1, shall be unit packaged in accordance with method IC-1 of MIL-P-116.

5.1.2 Level C. Repair kits shall be preserved and packaged to afford adequate protection against corrosion, deterioration and damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice, when it meets these requirements.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

* 5.2.1 Level A. Twenty kits, packaged and preserved as specified in 5.1, shall be packed in a snug-fitting, fiberboard shipping container conforming to style RSC, grade V2s, of PPP-B-636. Each fiberboard shipping container shall be closed and reinforced with flat strapping or tape banding in accordance with the appendix of the container specification.

5.2.2 Level B. Twenty kits, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC, type CF, variety SW, or type SF, class domestic, grade 275 of PPP-B-636. Closure shall be in accordance with method II of the appendix of PPP-B-636.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:20Z
Check the source to verify that this is the current version before use.

5.2.2.1 When specified (see 6.2), weather-resistant fiberboard specified in 5.2.1 shall be used for the shipping container.

* 5.2.3 Level C. Repair kits, preserved and packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with Uniform Freight Classification Rules and National Motor Freight Classification Rules, as applicable.

5.3 Marking. In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The items covered by this specification are intended for use in repairing steel measuring tapes in the field.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
* (b) When first article is required (see 3.1, 4.3 and 6.3).
(c) Selection of applicable levels of preservation, packaging, and packing (see 5.1 and 5.2).
(d) When level B pack shall be in accordance with 5.2.2.1.

* 6.3 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of ASPR 7-104.55. The first article should be a preproduction sample, initial production item or other specific item described under the definition of a first article in the ASPR. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should include specific instructions in all procurement instruments regarding arrangements for inspection and approval of the first article.

* 6.4 The margins of this document have been marked with an asterisk (*) to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and suppliers are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:

Army - GL
Air Force - 84

User activities:

Army - ME
Navy - MC

Preparing activity:

Army - GL

Project No. 5210-0200

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:20Z
Check the source to verify that this is the current version before use.

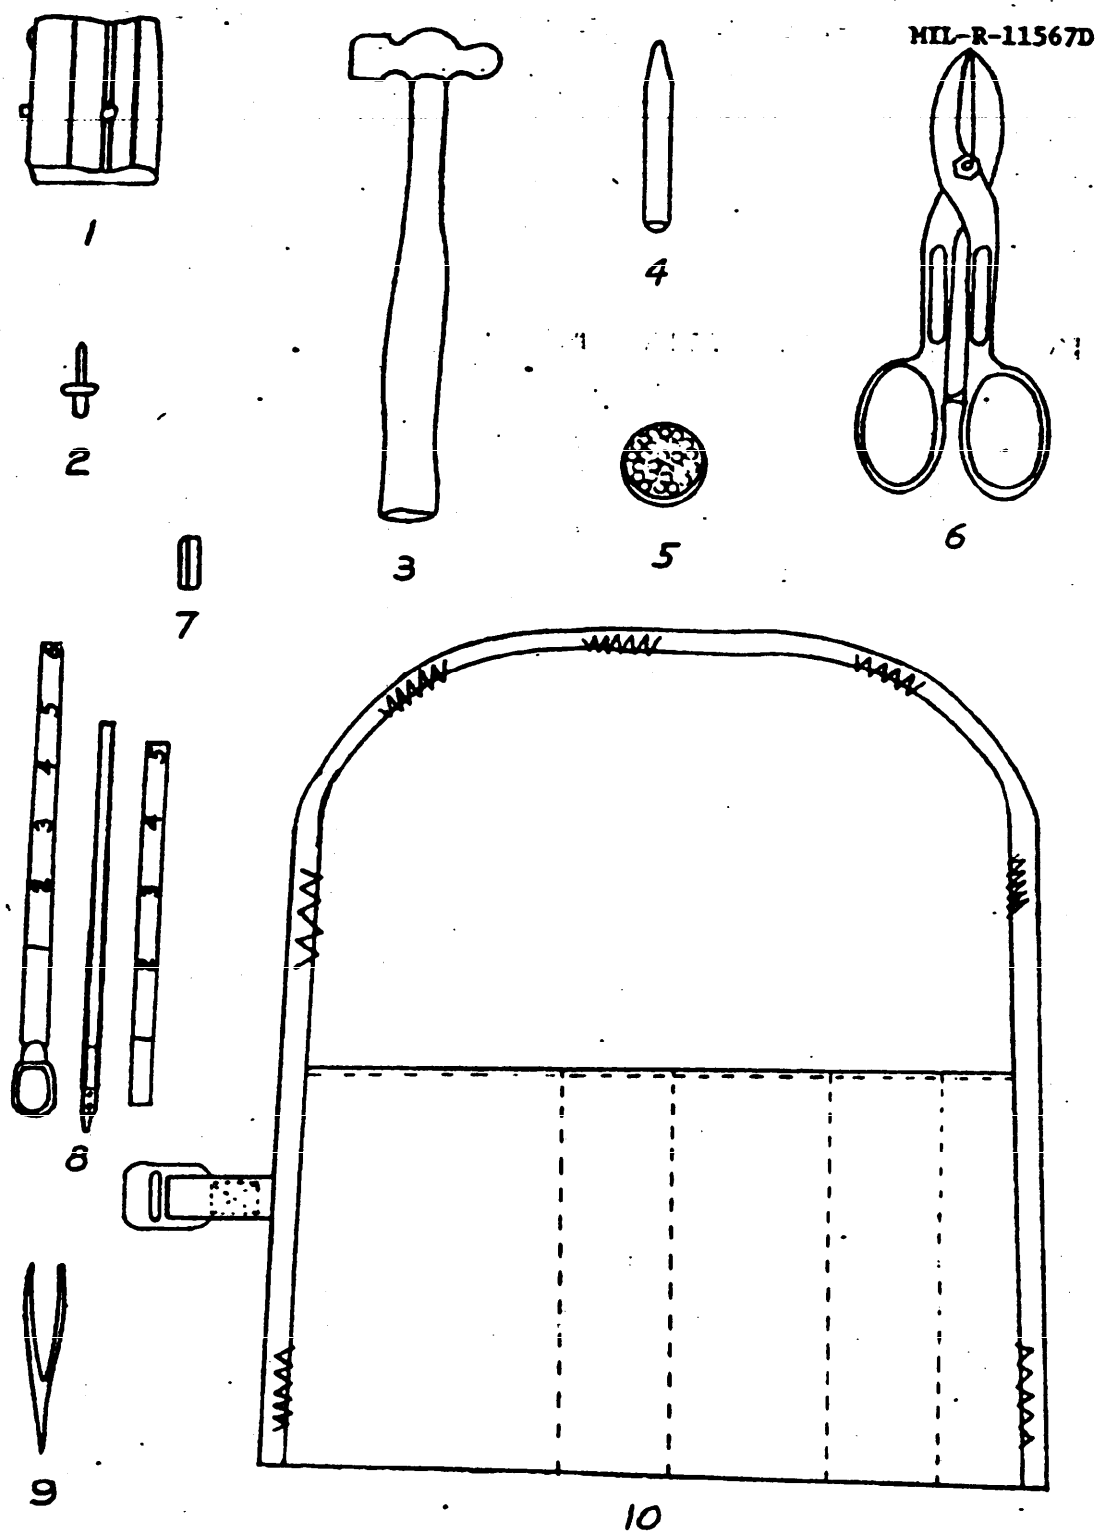


FIGURE 1 REPAIR KIT, STEEL MEASURING TAPE, WITH CASE

Source: https://assist.dla.mil -- Downloaded: 202610-17T18:20Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
US ARMY NATICK LABORATORIES
NATICK, MA 01760

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

STSNL-T-EQS

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314

Commander
US Army Natick Laboratories
ATTN: STSNL-T-EQS
Natick, Massachusetts 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:20Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

Repair Kit, Steel Measuring Tape, With Case MIL-R-11567D

NAME OF ORGANIZATION AND ADDRESS	CONTRACT NUMBER
	MATERIAL PROCURED UNDER A ☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?
   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*	TELEPHONE NO.
	DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:20Z
Check the source to verify that this is the current version before use.